



ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH EN 15804+A2 & ISO 14025

Copenhagen LED gen2 large BDS562/BRS562/BSS562

Signify N.V.



EPD HUB, HUB-5588

Published on 03.03.2026, last updated on 03.03.2026, valid until 03.03.2031

MANUFACTURER AND SITE

Manufacturer	Signify N.V.
Address	High Tech Campus 48, 5656 AE Eindhoven, The Netherlands
Contact details	sustainability@signify.com
Website	https://www.signify.com/global
Place of production	COPENHAGEN, DENMARK
Place(s) of raw material origin	APAC, EU
Place(s) of installation and use	DENMARK
Period for data	Calendar Year 2023

EPD STANDARDS, SCOPE AND VERIFICATION

Program operator	EPD Hub, hub@epdhub.com
Reference standard	EN 15804:2012+A2:2019/AC:2021 and ISO 14025
PCR	EPD Hub Core PCR version 1.2, 24 Mar 2025
Sector	Electrical product
Category of EPD	Third party verified EPD
Scope of the EPD	Cradle to gate with options, A4-A5, B6, and modules C1-C4, D
EPD author	Signify / Sustainability
EPD verification	Independent verification of this EPD and data, according to ISO 14025: <input type="checkbox"/> Internal verification <input checked="" type="checkbox"/> External verification
EPD verifier	Imane Uald Lamkaddam as an authorized verifier for EPD Hub

PRODUCT SPECIFICATION

Product name	Copenhagen LED gen2 large BDS562/BRS562/BSS562
Product number / reference	919008635342 / BRS562 LED64/740 II DM31GR CLOLS850 C10K
GTIN (Global Trade Item Number)	Not applicable
NOBB (Norwegian Building Product Database)	Not applicable
A1-A3 Specific data (%)	7.75

PRODUCT DESCRIPTION

The original Copenhagen luminaire was co-designed with Copenhagen's Office of City Architecture in the 1960s. This timeless luminaire design comes in three types: Copenhagen LED gen2, which delivers high performance for road lighting applications; Copenhagen City LED gen2, which is for city and residential areas where balanced light comfort and cohesive design language are appreciated; Copenhagen City Comfort LED, which caters to the needs of sensitive inner-city areas with high demand for spill light control and high comfort. The second generation of Copenhagen LED is available in a range of sizes, from mini to mega. This makes it suitable for any type of application while ensuring the dimensions of the luminaire and pole are well balanced, so every installation blends harmoniously into its surroundings. Various suspensions are available, allowing a variety of mounting options to provide maximum freedom during installation. Thanks to the built in LEDGINE-O engine, and the wide range of application-tailored optics, Copenhagen LED luminaires deliver the right amount of light and in the right direction on your street, enabling important energy savings. In order to reduce the carbon footprint of the luminaires, the iconic canopy is made of bio-based plastic and main metal parts manufactured from recycled aluminium. The luminaire is available with one or two Zhaga-D4i (ZD4i) system ready sockets, which makes the luminaire future ready, ready to pair with advanced control and lighting software applications such as Interact. Due to the plastic material usage,

This EPD is intended for business-to-business and/or business-to-consumer communication. Life Cycle Assessment study has been performed in accordance with the requirements of EN 15804, EPD Hub PCR version 1.2 (24 Mar 2025) and JRC characterization factors EF 3.1. The manufacturer has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804 and if they are not compared in a building context.

the top socket can be integrated into the canopy without impacting the clean design of the luminaire.

PRODUCT CLASSIFICATION

Declared operating voltage, Volt	220-240
Light source colour temperature, Kelvin	4000
Protection index for water and dust (IP)	66
Impact resistance index (IK)	7
Luminous flux, Lumens	5456
Electrical power, Watt	37
Luminous efficiency, Lm/W	147
Additional characteristic	Not applicable

ABOUT THE MANUFACTURER

Signify is the world leader in lighting for professionals, consumers and lighting for the Internet of Things. Our energy efficient lighting products, systems and services enable our customers to enjoy a superior quality of light, and make people's lives safer and more comfortable, businesses more productive and cities more liveable.

For more information, please visit: <https://www.signify.com/global>

PRODUCT RAW MATERIAL MAIN COMPOSITION

Raw material category	Amount, mass- %	Material origin
Metals	47.46	APAC , EU
Minerals	2.59	EU
Fossil materials	32.15	APAC , EU
Bio-based materials	17.8	EU

BIOGENIC CARBON CONTENT

Product's biogenic carbon content at the factory gate

Biogenic carbon content in product, kg C	1.31
Biogenic carbon content in packaging, kg C	0.512

ENVIRONMENTAL DATA SUMMARY

Declared unit	1 unit
Declared unit mass, kg	7.909
Mass of packaging, kg	1.291
Functional unit (from PEP PSR0014)	Provide lighting that delivers an outgoing artificial luminous flux of 1000 lumens during a reference lifetime of 35000 hours
Reference service life (years)	25
Assigned lifetime (hours)	100000
GWP-total, A1-A3 (kg CO ₂ e)	48.8
GWP-fossil, A1-A3 (kg CO ₂ e)	56.1
Secondary material, inputs (%)	27.8
Secondary material, outputs (%)	33.1
Total energy use, A1-A3 (kWh)	207
Net freshwater use, A1-A3 (m ³)	6.93E-01

LIFE CYCLE ASSESSMENT

SYSTEM BOUNDARY

This EPD covers the life-cycle modules listed in the following table.

Product stage			Installation stage		Use stage							End of life stage				Beyond the system
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	X	X	ND	ND	ND	ND	ND	X	ND	X	X	X	X	X
Raw materials	Transport	Manufacturing	Transport	Installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstr./demo.	Transport	Waste processing	Disposal	Reuse, Recovery, Recycling

Modules not declared = ND.

CUT - OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the reference standard and the applied PCR. The study does not exclude any hazardous materials or substances. There is no neglected unit process more than 1% of total mass or energy flows. The module-specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

The production of capital equipment, construction activities, and infrastructure, maintenance and operation of capital equipment, personnel-related activities,

energy and water use related to company management and sales activities are excluded.

VALIDATION OF DATA

Data collection for production, transport, and packaging was conducted using time and site-specific information, as defined in the general information section on page 1 and 2. Upstream process calculations rely on generic data as defined in the Bibliography section. Manufacturer-provided specific and generic data were used for the product's manufacturing stage. The analysis was performed in One Click LCA EPD Generator, with the 'Cut-Off, EN 15804+A2' allocation method, and characterization factors according to EN 15804:2012+A2:2019/AC:2021 and JRC EF 3.1.

ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation. All allocations are done as per the reference standards and the applied PCR. In this study, ancillary materials, energy & water consumption, material loss and waste generation at the manufacturing site are attributed to the bill of materials of the products, therefore, they are allocated by partitioning the quantities on the base of the total production in kg throughout the year. Thus, allocation has been done in the following ways:

Data type	Allocation
Raw materials	No allocation
Packaging materials	No allocation
Ancillary materials	Allocated by mass
Manufacturing energy and waste	Allocated by mass

Proxy data is used for certain materials due to their unavailability in the database. Conservative choices have been adopted when exact information was missing. Regarding module C1-C4: EOL scenarios are based on default values from EN 50693. For stages description please refer to section Product life cycle in this EPD report.

LCA SOFTWARE AND BIBLIOGRAPHY

This EPD has been created using One Click LCA Luminaire EPD Generator v2.2.7. The LCA and EPD have been prepared according to the reference standards, EN 50693, and ISO 14040/14044. Ecoinvent v 3.10.1 and One Click LCA databases were used as sources of environmental data. Allocation used in Ecoinvent 3.10.1 environmental data sources follow the methodology 'allocation, cut-off, EN 15804+A2'.

No other sources were used in the modelling of this EPD.

PRODUCT & MANUFACTURING SITES GROUPING

Type of grouping	No grouping
Grouping method	Not applicable
Variation in GWP-fossil for A1-A3, %	-

SUBSTANCES, REACH - VERY HIGH CONCERN

Substances of very high concern	EC	CAS
Lead	231-100-4	7439-92-1

PRODUCT LIFE CYCLE

MANUFACTURING AND PACKAGING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production. The material losses occurring during the manufacturing processes are treated as per the waste handling practices in the factory, while scenario assumptions are made in the absence of exact data. The study also considers the fuels used by machines as well as losses during electricity transmission.

The product is made of metals, plastics, and electronic components. All components are transported to the production facility, where the main manufacturing processes primarily are associated with assembly. A2 transport distances are calculated always taking the capital city of component country of origin as a starting point and exact manufacturing location as destination. The finished product can be packaged with polyethylene, cardboard, and/or paper as packaging material before shipment to customers. Manufacturing loss, ancillaries and wastes are calculated according to the data that each manufacturing site is sharing with Signify. The total annual amount of waste in kg is allocated to the total annual production in kg at the specific manufacturing site responsible to produce the studied product. Thus, it is possible to allocate it according to the weight of the product analysed in this study.

Co-product allocation is neglected as revenue of co-product is very low, hence, the waste undergoes a conservative waste treatment.

The use of renewable energy in manufacturing is demonstrated through contractual instruments (GOs, RECs, etc), and its use is ensured throughout the validity period of this EPD.

TRANSPORT AND INSTALLATION (A4-A5)

A4 transport distances are calculated always taking the exact manufacturing location to customer location. If the customer's location is defined as a country or its capital city, the calculation is made to the respective capital city. If the

customer's location is specified as a region, the distance is calculated to the capital city of the best-performing sales country within that region. The transportation method is a combination of lorry and container ship where needed. To be conservative, empty returns are included in this study as implemented through an average load factor in the Ecoinvent transport datapoints. Environmental impacts from installation include waste packaging materials (A5). The packaging waste treatment is assumed to be conservative with incineration without energy recovery. The impacts of energy consumption and the used ancillary materials during installation are considered negligible.

PRODUCT USE AND MAINTENANCE (B1-B7)


During the use phase, the product consumes electricity (B6), which is calculated multiplying the Wattage x Assigned lifetime (hours) x Country energy mix factor. To know which Country energy mix was used in this EPD, please refer to Annex 2.

The Reference service life in years is calculated according to the main application type of the product, based on annual operating hours. Impacts due to electricity production include direct emissions to air, transformation, and transmission losses.

PRODUCT END OF LIFE (C1-C4, D)

Consumption of energy and natural resources in demolition process is assumed to be negligible. It is assumed that the waste is collected separately and transported to the waste treatment centre. The transport distance is 150 km while the transportation method is assumed to be lorry (C2). According to EN 50693:2019, the sequence of treatment operations occurring to the product shall include de-pollution, fractions separation and preparation (dismantling, crushing, shredding, sorting), recycling, other material recovery, energy recovery and disposal. In this study, the default values from table G.4 of EN 50693 is used for treating materials in different waste treatment methods. Due to the material and energy recovery potential of parts in the lighting system, the end-of-life product is converted into recycled raw materials, while the energy recovered from incineration displaces electricity and heat production (D). The benefits and loads of incineration and recycling are included in Module D.

LIFE CYCLE FLOW DIAGRAM - SYSTEM BOUNDARY

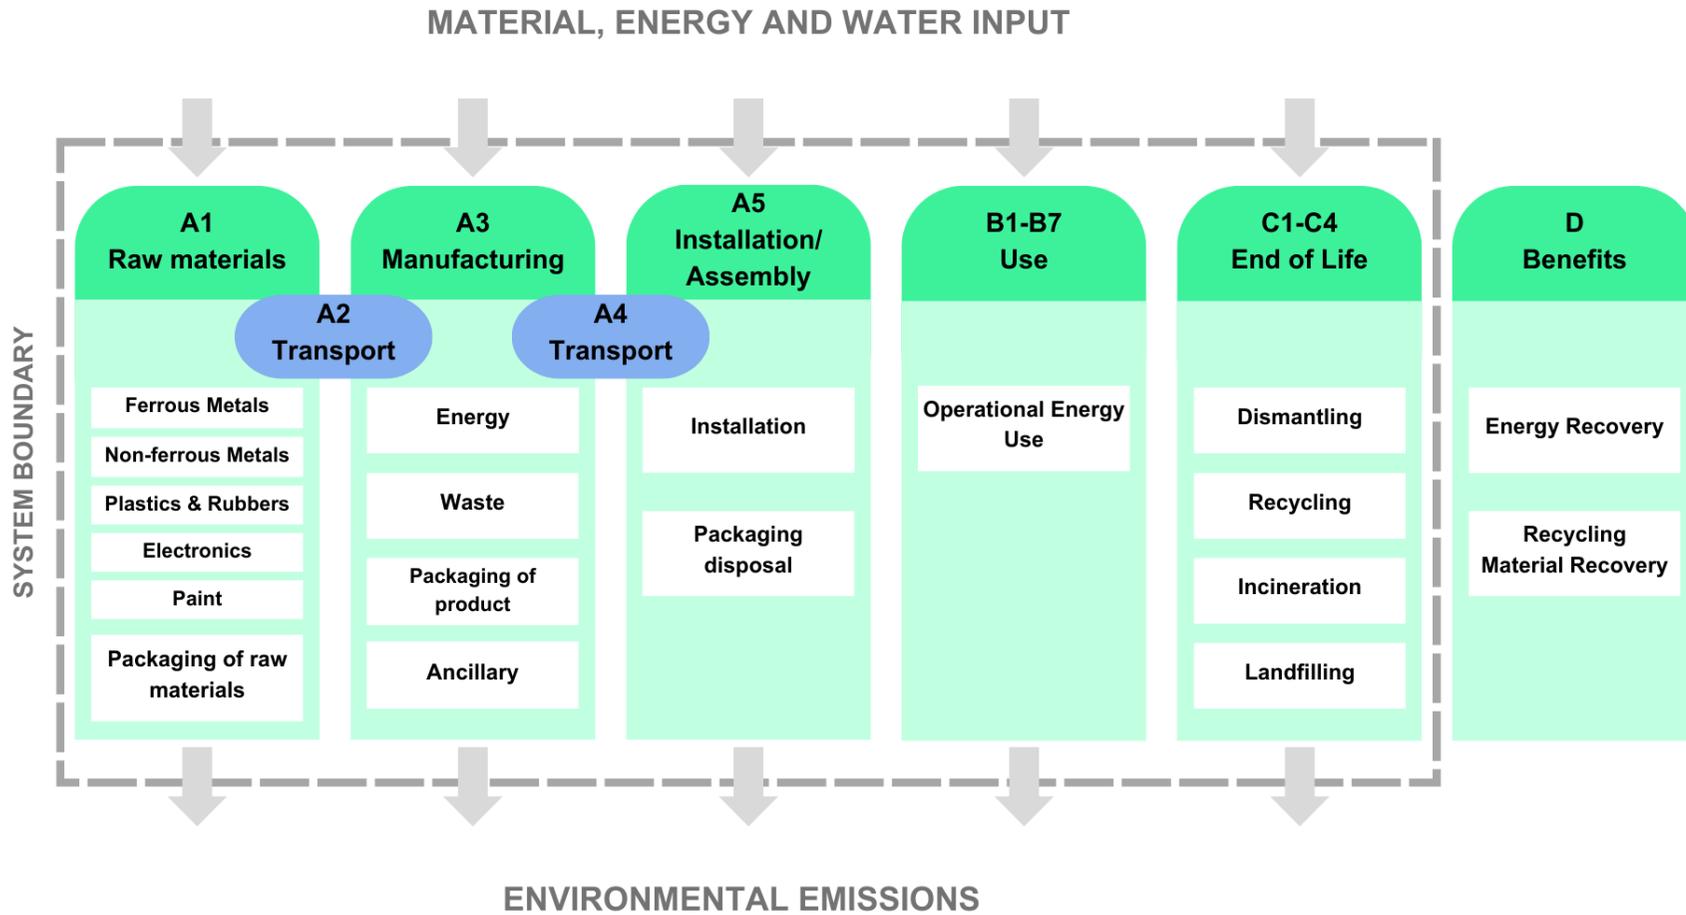

ENVIRONMENTAL IMPACT DATA, RESULTS PER DECLARED UNIT

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding threshold values, safety margins or risks.

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total ¹⁾	kg CO ₂ e	4.71E+01	1.83E-01	1.50E+00	4.88E+01	7.43E-02	1.95E+00	ND	ND	ND	ND	ND	5.78E+02	ND	0.00E+00	2.34E-01	4.55E+00	2.51E+00	-8.86E+00
GWP – fossil	kg CO ₂ e	5.30E+01	1.82E-01	2.91E+00	5.61E+01	7.43E-02	8.09E-02	ND	ND	ND	ND	ND	5.73E+02	ND	0.00E+00	2.33E-01	4.55E+00	2.51E+00	-8.84E+00
GWP – biogenic	kg CO ₂ e	-6.89E+00	3.57E-05	-1.45E+00	-8.34E+00	1.68E-05	1.87E+00	ND	ND	ND	ND	ND	2.46E+00	ND	0.00E+00	5.10E-05	-2.34E-04	-2.56E-04	-1.21E-02
GWP – LULUC	kg CO ₂ e	1.02E+00	8.91E-05	4.27E-02	1.06E+00	3.32E-05	2.98E-05	ND	ND	ND	ND	ND	2.46E+00	ND	0.00E+00	1.03E-04	1.79E-04	6.97E-05	-1.46E-02
Ozone depletion pot.	kg CFC-11e	2.69E-06	2.66E-09	1.17E-07	2.81E-06	1.10E-09	1.11E-09	ND	ND	ND	ND	ND	1.23E-05	ND	0.00E+00	3.26E-09	2.61E-09	1.69E-09	-5.28E-08
Acidification potential	mol H ⁺ e	5.27E-01	2.69E-03	1.20E-02	5.42E-01	2.53E-04	4.81E-04	ND	ND	ND	ND	ND	3.44E+00	ND	0.00E+00	7.78E-04	1.94E-03	8.02E-04	-1.68E-01
EP-freshwater ²⁾	kg Pe	2.74E-02	1.05E-05	1.01E-03	2.84E-02	5.78E-06	8.13E-06	ND	ND	ND	ND	ND	4.21E-01	ND	0.00E+00	1.82E-05	6.65E-05	1.35E-05	-9.96E-03
EP-marine	kg Ne	1.10E-01	6.97E-04	5.00E-03	1.16E-01	8.32E-05	2.24E-04	ND	ND	ND	ND	ND	6.19E-01	ND	0.00E+00	2.52E-04	7.75E-04	3.05E-03	-1.23E-02
EP-terrestrial	mol Ne	9.04E-01	7.72E-03	3.32E-02	9.44E-01	9.05E-04	2.05E-03	ND	ND	ND	ND	ND	7.45E+00	ND	0.00E+00	2.74E-03	7.14E-03	3.69E-03	-1.46E-01
POCP (“smog”) ³⁾	kg NMVOCe	2.43E-01	2.27E-03	1.10E-02	2.56E-01	3.73E-04	5.82E-04	ND	ND	ND	ND	ND	1.86E+00	ND	0.00E+00	1.08E-03	1.89E-03	1.04E-03	-4.36E-02
ADP-minerals & metals ⁴⁾	kg Sbe	3.62E-03	3.65E-07	1.81E-05	3.64E-03	2.07E-07	2.41E-07	ND	ND	ND	ND	ND	1.80E-02	ND	0.00E+00	7.67E-07	4.74E-06	2.69E-07	-2.01E-03
ADP-fossil resources	MJ	6.46E+02	2.47E+00	4.09E+01	6.89E+02	1.08E+00	8.37E-01	ND	ND	ND	ND	ND	9.21E+03	ND	0.00E+00	3.27E+00	2.10E+00	1.21E+00	-1.06E+02
Water use ⁵⁾	m ³ e depr.	3.09E+01	1.01E-02	1.36E+00	3.23E+01	5.32E-03	9.68E-02	ND	ND	ND	ND	ND	1.03E+03	ND	0.00E+00	1.52E-02	3.14E-01	1.57E-01	-2.34E+00

1) GWP = Global Warming Potential. 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO4e. 3) POCP = Photochemical ozone formation. 4) ADP = Abiotic depletion potential. 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Particulate matter	Incidence	4.26E-06	1.27E-08	2.14E-07	4.49E-06	7.44E-09	5.99E-09	ND	ND	ND	ND	ND	2.26E-05	ND	0.00E+00	1.85E-08	1.73E-08	8.60E-09	-7.09E-07
Ionizing radiation ⁶⁾	kBq U235e	3.05E+00	1.74E-03	1.24E-01	3.18E+00	9.39E-04	1.01E-03	ND	ND	ND	ND	ND	2.05E+02	ND	0.00E+00	2.65E-03	8.68E-03	1.78E-03	-9.64E-01
Ecotoxicity (freshwater)	CTUe	7.48E+02	2.83E-01	1.31E+01	7.61E+02	1.52E-01	2.31E+00	ND	ND	ND	ND	ND	3.22E+03	ND	0.00E+00	5.18E-01	9.32E+00	8.47E+01	-1.27E+02
Human toxicity, cancer	CTUh	5.00E-08	3.39E-11	1.33E-09	5.14E-08	1.23E-11	1.12E-10	ND	ND	ND	ND	ND	3.60E-07	ND	0.00E+00	3.97E-11	4.46E-10	4.31E-10	-1.82E-08
Human tox. non-cancer	CTUh	2.26E-06	1.20E-09	3.71E-08	2.30E-06	6.98E-10	4.55E-09	ND	ND	ND	ND	ND	1.91E-05	ND	0.00E+00	2.05E-09	1.79E-08	1.33E-08	-1.82E-06
SQP ⁷⁾	-	6.09E+02	1.58E+00	1.49E+02	7.60E+02	1.09E+00	4.09E-01	ND	ND	ND	ND	ND	1.61E+04	ND	0.00E+00	1.96E+00	1.94E+00	1.50E+00	-6.59E+01

USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER as energy ⁸⁾	MJ	7.64E+01	2.79E-02	1.30E+01	8.94E+01	1.48E-02	-2.29E+01	ND	ND	ND	ND	ND	1.42E+04	ND	0.00E+00	4.49E-02	2.23E-01	3.38E-02	-1.54E+01
Renew. PER as material	MJ	4.01E+00	0.00E+00	1.26E+01	1.66E+01	0.00E+00	-1.66E+01	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	-7.85E-03	-1.46E-02	0.00E+00
Total use of renew. PER	MJ	8.04E+01	2.79E-02	2.56E+01	1.06E+02	1.48E-02	-3.95E+01	ND	ND	ND	ND	ND	1.42E+04	ND	0.00E+00	4.49E-02	2.15E-01	1.92E-02	-1.54E+01
Non-re. PER as energy	MJ	6.12E+02	2.47E+00	4.05E+01	6.55E+02	1.08E+00	8.37E-01	ND	ND	ND	ND	ND	9.21E+03	ND	0.00E+00	3.27E+00	-6.58E+01	-7.97E+01	-1.06E+02
Non-re. PER as material	MJ	4.45E+01	0.00E+00	-4.39E-01	4.40E+01	0.00E+00	-1.66E-01	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	-2.19E+01	-2.20E+01	0.00E+00
Total use of non-re. PER	MJ	6.57E+02	2.47E+00	4.01E+01	6.99E+02	1.08E+00	6.71E-01	ND	ND	ND	ND	ND	9.21E+03	ND	0.00E+00	3.27E+00	-8.77E+01	-1.02E+02	-1.06E+02
Secondary materials	kg	2.20E+00	0.00E+00	0.00E+00	2.20E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Renew. secondary fuels	MJ	6.61E-02	9.08E-06	1.29E-01	1.95E-01	5.83E-06	1.04E-05	ND	ND	ND	ND	ND	3.55E-02	ND	0.00E+00	1.87E-05	8.76E-05	2.15E-05	-1.39E-03
Non-ren. secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use of net fresh water	m ³	6.62E-01	2.87E-04	3.11E-02	6.93E-01	1.59E-04	1.57E-03	ND	ND	ND	ND	ND	3.38E+01	ND	0.00E+00	4.34E-04	5.59E-03	-3.64E-03	-9.53E-02

8) PER = Primary energy resources.

END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg	8.46E+00	3.82E-03	1.64E-01	8.63E+00	1.83E-03	2.55E-02	ND	ND	ND	ND	ND	5.62E+01	ND	0.00E+00	5.71E-03	8.59E-02	1.37E-01	-1.31E+00
Non-hazardous waste	kg	2.08E+02	6.42E-02	1.15E+01	2.19E+02	3.38E-02	1.38E+00	ND	ND	ND	ND	ND	2.05E+03	ND	0.00E+00	1.07E-01	2.33E+00	1.09E+01	-5.65E+01
Radioactive waste	kg	7.76E-04	4.25E-07	2.97E-05	8.06E-04	2.30E-07	2.54E-07	ND	ND	ND	ND	ND	4.66E-02	ND	0.00E+00	6.49E-07	2.14E-06	4.44E-07	-2.38E-04

END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for reuse	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	kg	0.00E+00	0.00E+00	6.75E-02	6.75E-02	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	2.62E+00	0.00E+00	0.00E+00
Materials for energy rec	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Exported energy	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	2.13E+01	0.00E+00	0.00E+00
Exported energy – Electricity	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	8.96E+00	0.00E+00	0.00E+00
Exported energy – Heat	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	1.23E+01	0.00E+00	0.00E+00

ENVIRONMENTAL IMPACTS – EN 15804+A1, CML

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Pot.	kg CO ₂ e	5.27E+01	1.82E-01	3.08E+00	5.60E+01	7.39E-02	8.02E-02	ND	ND	ND	ND	ND	5.74E+02	ND	0.00E+00	2.32E-01	4.54E+00	2.50E+00	-8.80E+00
Ozone depletion Pot.	kg CFC-11e	3.16E-06	2.12E-09	1.08E-07	3.27E-06	8.75E-10	9.45E-10	ND	ND	ND	ND	ND	1.12E-05	ND	0.00E+00	2.61E-09	2.27E-09	1.43E-09	-4.48E-08
Acidification	kg SO ₂ e	3.79E-01	2.14E-03	8.61E-03	3.90E-01	1.93E-04	3.53E-04	ND	ND	ND	ND	ND	2.76E+00	ND	0.00E+00	5.96E-04	1.47E-03	5.76E-04	-1.47E-01
Eutrophication	kg PO ₄ ³ e	1.87E-01	2.70E-04	5.23E-03	1.93E-01	4.71E-05	1.10E-04	ND	ND	ND	ND	ND	4.98E-01	ND	0.00E+00	1.45E-04	3.63E-04	3.28E-04	-8.09E-03
POCP ("smog")	kg C ₂ H ₄ e	2.64E-02	1.16E-04	1.05E-03	2.76E-02	1.72E-05	2.69E-05	ND	ND	ND	ND	ND	1.78E-01	ND	0.00E+00	5.34E-05	9.12E-05	5.86E-05	-6.65E-03
ADP-elements	kg Sbe	3.60E-03	3.57E-07	1.79E-05	3.62E-03	2.02E-07	2.01E-07	ND	ND	ND	ND	ND	1.80E-02	ND	0.00E+00	7.48E-07	4.63E-06	2.15E-07	-2.01E-03
ADP-fossil	MJ	5.96E+02	2.44E+00	3.88E+01	6.37E+02	1.06E+00	8.20E-01	ND	ND	ND	ND	ND	6.27E+03	ND	0.00E+00	3.23E+00	1.97E+00	1.18E+00	-9.09E+01

ADDITIONAL INDICATOR – GWP-GHG

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-GHG 9)	kg CO ₂ e	5.40E+01	1.83E-01	2.95E+00	5.71E+01	7.43E-02	8.09E-02	ND	ND	ND	ND	ND	5.75E+02	ND	0.00E+00	2.34E-01	4.55E+00	2.51E+00	-8.85E+00

9) This indicator includes all greenhouse gases excluding biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. In addition, the characterisation factors for the flows - CH₄ fossil, CH₄ biogenic and Dinitrogen monoxide - were updated. This indicator is identical to the GWP-total of EN 15804:2012+A2:2019 except that the characterization factor for biogenic CO₂ is set to zero.

ENVIRONMENTAL IMPACT DATA, RESULTS PER FUNCTIONAL UNIT

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding threshold values, safety margins or risks.

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total ¹⁾	kg CO ₂ éq/FU	3.02E+00	1.17E-02	9.59E-02	3.13E+00	4.77E-03	1.25E-01	ND	ND	ND	ND	ND	3.71E+01	ND	0.00E+00	1.50E-02	2.92E-01	1.61E-01	-5.68E-01
GWP – fossil	kg CO ₂ éq/FU	3.40E+00	1.17E-02	1.86E-01	3.60E+00	4.76E-03	5.19E-03	ND	ND	ND	ND	ND	3.68E+01	ND	0.00E+00	1.50E-02	2.92E-01	1.61E-01	-5.67E-01
GWP – biogenic	kg CO ₂ éq/FU	-4.42E-01	2.29E-06	-9.33E-02	-5.35E-01	1.08E-06	1.20E-01	ND	ND	ND	ND	ND	1.58E-01	ND	0.00E+00	3.27E-06	-1.50E-05	-1.64E-05	-7.74E-04
GWP – LULUC	kg CO ₂ éq/FU	6.52E-02	5.71E-06	2.74E-03	6.80E-02	2.13E-06	1.91E-06	ND	ND	ND	ND	ND	1.58E-01	ND	0.00E+00	6.63E-06	1.15E-05	4.47E-06	-9.39E-04
Ozone depletion pot.	kg CFC ₁₁ e/FU	1.72E-07	1.71E-10	7.52E-09	1.80E-07	7.03E-11	7.13E-11	ND	ND	ND	ND	ND	7.87E-07	ND	0.00E+00	2.09E-10	1.68E-10	1.09E-10	-3.39E-09
Acidification potential	mole H ⁺ e/FU	3.38E-02	1.73E-04	7.70E-04	3.48E-02	1.62E-05	3.08E-05	ND	ND	ND	ND	ND	2.21E-01	ND	0.00E+00	4.99E-05	1.24E-04	5.15E-05	-1.08E-02
EP-freshwater ²⁾	kg Pe/FU	1.76E-03	6.74E-07	6.50E-05	1.82E-03	3.71E-07	5.21E-07	ND	ND	ND	ND	ND	2.70E-02	ND	0.00E+00	1.16E-06	4.27E-06	8.68E-07	-6.39E-04
EP-marine	kg Ne/FU	7.05E-03	4.47E-05	3.21E-04	7.42E-03	5.34E-06	1.44E-05	ND	ND	ND	ND	ND	3.97E-02	ND	0.00E+00	1.62E-05	4.97E-05	1.96E-04	-7.92E-04
EP-terrestrial	mol Ne/FU	5.80E-02	4.95E-04	2.13E-03	6.06E-02	5.81E-05	1.31E-04	ND	ND	ND	ND	ND	4.78E-01	ND	0.00E+00	1.76E-04	4.58E-04	2.37E-04	-9.39E-03
POCP (“smog”) ³⁾	kg NMVOCe/	1.56E-02	1.46E-04	7.09E-04	1.64E-02	2.39E-05	3.74E-05	ND	ND	ND	ND	ND	1.19E-01	ND	0.00E+00	6.95E-05	1.21E-04	6.64E-05	-2.79E-03
ADP-minerals & metals ⁴⁾	kg Sbe/FU	2.32E-04	2.34E-08	1.16E-06	2.33E-04	1.33E-08	1.54E-08	ND	ND	ND	ND	ND	1.16E-03	ND	0.00E+00	4.92E-08	3.04E-07	1.73E-08	-1.29E-04
ADP-fossil resources	MJ/FU	4.14E+01	1.58E-01	2.62E+00	4.42E+01	6.91E-02	5.37E-02	ND	ND	ND	ND	ND	5.91E+02	ND	0.00E+00	2.10E-01	1.35E-01	7.76E-02	-6.81E+00
Water use ⁵⁾	m ³ e priv./FU	1.98E+00	6.47E-04	8.74E-02	2.07E+00	3.42E-04	6.21E-03	ND	ND	ND	ND	ND	6.64E+01	ND	0.00E+00	9.74E-04	2.01E-02	1.00E-02	-1.50E-01

1) GWP = Global Warming Potential. 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO4e. 3) POCP = Photochemical ozone formation. 4) ADP = Abiotic depletion potential. 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Particulate matter	Incidence /FU	2.74E-07	8.12E-10	1.38E-08	2.88E-07	4.77E-10	3.84E-10	ND	ND	ND	ND	ND	1.45E-06	ND	0.00E+00	1.19E-09	1.11E-09	5.52E-10	-4.55E-08
Ionizing radiation ⁶⁾	kBq U235e/FU	1.96E-01	1.12E-04	7.97E-03	2.04E-01	6.02E-05	6.50E-05	ND	ND	ND	ND	ND	1.31E+01	ND	0.00E+00	1.70E-04	5.57E-04	1.14E-04	-6.19E-02
Ecotoxicity (freshwater)	CTUe/FU	4.80E+01	1.82E-02	8.39E-01	4.88E+01	9.78E-03	1.48E-01	ND	ND	ND	ND	ND	2.07E+02	ND	0.00E+00	3.32E-02	5.98E-01	5.44E+00	-8.12E+00
Human toxicity, cancer	CTUh/FU	3.21E-09	2.17E-12	8.51E-11	3.30E-09	7.86E-13	7.16E-12	ND	ND	ND	ND	ND	2.31E-08	ND	0.00E+00	2.55E-12	2.86E-11	2.76E-11	-1.17E-09
Human tox. non-cancer	CTUh/FU	1.45E-07	7.72E-11	2.38E-09	1.48E-07	4.48E-11	2.92E-10	ND	ND	ND	ND	ND	1.22E-06	ND	0.00E+00	1.31E-10	1.15E-09	8.56E-10	-1.17E-07
SQP ⁷⁾	-/FU	3.91E+01	1.01E-01	9.58E+00	4.87E+01	6.96E-02	2.63E-02	ND	ND	ND	ND	ND	1.03E+03	ND	0.00E+00	1.25E-01	1.24E-01	9.65E-02	-4.23E+00

USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER as energy ⁸⁾	MJ/FU	4.90E+00	1.79E-03	8.33E-01	5.73E+00	9.48E-04	-1.47E+00	ND	ND	ND	ND	ND	9.12E+02	ND	0.00E+00	2.88E-03	1.43E-02	2.17E-03	-9.88E-01
Renew. PER as material	MJ/FU	2.57E-01	0.00E+00	8.09E-01	1.07E+00	0.00E+00	-1.06E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	-5.03E-04	-9.35E-04	0.00E+00
Total use of renew. PER	MJ/FU	5.16E+00	1.79E-03	1.64E+00	6.80E+00	9.48E-04	-2.54E+00	ND	ND	ND	ND	ND	9.12E+02	ND	0.00E+00	2.88E-03	1.38E-02	1.23E-03	-9.88E-01
Non-re. PER as energy	MJ/FU	3.93E+01	1.58E-01	2.60E+00	4.20E+01	6.91E-02	5.37E-02	ND	ND	ND	ND	ND	5.91E+02	ND	0.00E+00	2.10E-01	-4.22E+00	-5.11E+00	-6.81E+00
Non-re. PER as material	MJ/FU	2.85E+00	0.00E+00	-2.81E-02	2.82E+00	0.00E+00	-1.06E-02	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	-1.41E+00	-1.41E+00	0.00E+00
Total use of non-re. PER	MJ/FU	4.21E+01	1.58E-01	2.57E+00	4.49E+01	6.91E-02	4.30E-02	ND	ND	ND	ND	ND	5.91E+02	ND	0.00E+00	2.10E-01	-5.63E+00	-6.52E+00	-6.81E+00
Secondary materials	kg/FU	1.41E-01	0.00E+00	0.00E+00	1.41E-01	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Renew. secondary fuels	MJ/FU	4.24E-03	5.83E-07	8.29E-03	1.25E-02	3.74E-07	6.68E-07	ND	ND	ND	ND	ND	2.28E-03	ND	0.00E+00	1.20E-06	5.62E-06	1.38E-06	-8.95E-05
Non-ren. secondary fuels	MJ/FU	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use of net fresh water	m ³ /FU	4.24E-02	1.84E-05	1.99E-03	4.45E-02	1.02E-05	1.01E-04	ND	ND	ND	ND	ND	2.17E+00	ND	0.00E+00	2.78E-05	3.59E-04	-2.33E-04	-6.12E-03

8) PER = Primary energy resources.

END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg/FU	5.43E-01	2.45E-04	1.05E-02	5.53E-01	1.17E-04	1.63E-03	ND	ND	ND	ND	ND	3.61E+00	ND	0.00E+00	3.66E-04	5.51E-03	8.76E-03	-8.40E-02
Non-hazardous waste	kg/FU	1.33E+01	4.12E-03	7.35E-01	1.41E+01	2.17E-03	8.85E-02	ND	ND	ND	ND	ND	1.32E+02	ND	0.00E+00	6.87E-03	1.49E-01	7.00E-01	-3.62E+00
Radioactive waste	kg/FU	4.98E-05	2.73E-08	1.91E-06	5.17E-05	1.47E-08	1.63E-08	ND	ND	ND	ND	ND	2.99E-03	ND	0.00E+00	4.16E-08	1.37E-07	2.85E-08	-1.52E-05

END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for reuse	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	kg	0.00E+00	0.00E+00	4.33E-03	4.33E-03	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	1.68E-01	0.00E+00	0.00E+00
Materials for energy rec	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Exported energy	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	1.37E+00	0.00E+00	0.00E+00
Exported energy – Electricity	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	5.75E-01	0.00E+00	0.00E+00
Exported energy – Heat	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	7.91E-01	0.00E+00	0.00E+00

ENVIRONMENTAL IMPACTS – EN 15804+A1, CML

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Pot.	kg CO ₂ eq./FU	3.38E+00	1.16E-02	1.97E-01	3.59E+00	4.74E-03	5.15E-03	ND	ND	ND	ND	ND	3.68E+01	ND	0.00E+00	1.49E-02	2.92E-01	1.61E-01	-5.65E-01
Ozone depletion Pot.	kg CFC ₁₁ e/FU	2.03E-07	1.36E-10	6.95E-09	2.10E-07	5.61E-11	6.06E-11	ND	ND	ND	ND	ND	7.21E-07	ND	0.00E+00	1.67E-10	1.46E-10	9.18E-11	-2.88E-09
Acidification	kg SO ₂ e/FU	2.43E-02	1.37E-04	5.52E-04	2.50E-02	1.24E-05	2.27E-05	ND	ND	ND	ND	ND	1.77E-01	ND	0.00E+00	3.82E-05	9.41E-05	3.70E-05	-9.40E-03
Eutrophication	kg PO ₄ ³ e/FU	1.20E-02	1.73E-05	3.36E-04	1.24E-02	3.02E-06	7.04E-06	ND	ND	ND	ND	ND	3.20E-02	ND	0.00E+00	9.30E-06	2.33E-05	2.11E-05	-5.19E-04
POCP (“smog”)	kg C ₂ H ₄ e/FU	1.70E-03	7.47E-06	6.71E-05	1.77E-03	1.11E-06	1.73E-06	ND	ND	ND	ND	ND	1.14E-02	ND	0.00E+00	3.42E-06	5.85E-06	3.76E-06	-4.26E-04
ADP-elements	kg Sbe/FU	2.31E-04	2.29E-08	1.15E-06	2.32E-04	1.30E-08	1.29E-08	ND	ND	ND	ND	ND	1.15E-03	ND	0.00E+00	4.80E-08	2.97E-07	1.38E-08	-1.29E-04
ADP-fossil	MJ/FU	3.82E+01	1.57E-01	2.49E+00	4.09E+01	6.82E-02	5.26E-02	ND	ND	ND	ND	ND	4.02E+02	ND	0.00E+00	2.07E-01	1.26E-01	7.58E-02	-5.83E+00

ADDITIONAL INDICATOR – GWP-GHG

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-GHG ⁹⁾	kg CO ₂ e/FU	3.46E+00	1.17E-02	1.89E-01	3.66E+00	4.77E-03	5.19E-03	ND	ND	ND	ND	ND	3.69E+01	ND	0.00E+00	1.50E-02	2.92E-01	1.61E-01	-5.68E-01

9) This indicator includes all greenhouse gases excluding biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. In addition, the characterisation factors for the flows - CH₄ fossil, CH₄ biogenic and Dinitrogen monoxide - were updated. This indicator is identical to the GWP-total of EN 15804:2012+A2:2019 except that the characterization factor for biogenic CO₂ is set to zero.

SCENARIO DOCUMENTATION

DATA SOURCES

Manufacturing energy scenario documentation – A3 (Energy data source)

1. Energy supply, electricity production, co-generation oil and gas, Heat and power co-generation, natural gas, combined cycle power plant, 400MW electrical, Denmark,ecoinvent 3.10.1, 0.0267 kgCO₂e/MJ
2. Energy supply, electricity production, solar photovoltaic, Electricity production, photovoltaic, 570kWp open ground installation, multi-Si, World, ecoinvent 3.10.1, 0.0829 kgCO₂e/kWh

Transport scenario documentation - A4

1. Transport, freight, lorry >32 metric ton, EURO5, 75.0 km
2. Transport, freight, sea, container ship, 0.0 km

Installation scenario documentation - A5 (Waste materials data source)

1. Market for corrugated board box, 1.164 kg
2. Market for printed paper, offset, 0.127 kg

Use stages scenario documentation - B6-B7 (Energy data source)

1. Energy supply, electricity transformation and distribution, distribution low voltage, Market for electricity, low voltage, Denmark, 3700.0 kWh

TRANSPORT SCENARIO DOCUMENTATION - A4

Scenario parameter	Value
Capacity utilization (including empty return) %	50 %
Bulk density of transported products / kg/m ³	9.98E+01
Volume capacity utilization factor (factor: =1 or <1 or ≥1 for compressed or nested packaged products)	1

INSTALLATION SCENARIO DOCUMENTATION - A5

Scenario parameter	Value
Ancillary materials for installation (specified by material) / kg or other units as appropriate	0
Water use / m ³	0
Other resource use / kg	0
Direct emissions to ambient air, soil and water / kg	0

USE STAGES SCENARIO DOCUMENTATION - B6-B7 USE OF ENERGY AND WATER

Scenario information	Value
Ancillary materials specified by material / kg or units as appropriate	Not applicable
Net fresh water consumption / m ³	0
Power output of equipment / kW	37
Characteristic performance, e.g., energy efficiency, emissions, variation of performance with capacity utilization, etc. / Units as appropriate	For more details see product classification table and product description.
Further assumptions for scenario development, e.g., frequency and period of use, number of occupants / Units as appropriate	For more details see product classification table and product description.

END OF LIFE SCENARIO DOCUMENTATION

Scenario information	Value
Collection process – kg collected separately	7.909
Collection process – kg collected with mixed waste	0
Recovery process – kg for re-use	0
Recovery process – kg for recycling	2.62E+00
Recovery process – kg for energy recovery	0
Disposal (total) – kg for final deposition	3.31E+00
Scenario assumptions e.g. transportation	Lorry, 16-32 metric ton, EURO5; 150 km

THIRD-PARTY VERIFICATION STATEMENT

EPD Hub declares that this EPD is verified in accordance with ISO 14025 by an independent, third-party verifier. The project report on the Life Cycle Assessment and the report(s) on features of environmental relevance are filed at EPD Hub. EPD Hub PCR and ECO Platform verification checklist are used.

EPD Hub is not able to identify any unjustified deviations from the PCR and EN 15804+A2 in the Environmental Product Declaration and its project report.

EPD Hub maintains its independence as a third-party body; it was not involved in the execution of the LCA or in the development of the declaration and has no conflicts of interest regarding this verification.

The company-specific data and upstream and downstream data have been examined as regards plausibility and consistency. The publisher is responsible for ensuring the factual integrity and legal compliance of this declaration.



Program assistant: Xinyuan Zhang



The software used in creation of this LCA and EPD is verified by EPD Hub to conform to the procedural and methodological requirements outlined in ISO 14025:2010, ISO 14040/14044, EN 15804+A2, and EPD Hub Core Product Category Rules and General Program Instructions.

[Verified tools](#)

Tool verifier: Hai Ha Nguyen

Tool verification validity: 28 March 2025 - 27 March 2028

APPENDIX 1

MATERIAL COMPOSITION

The product material composition is illustrated in the table below. The material weight is given in grams and in percentage on total product weight.

Table 1: Material composition

Material	Weight (g)	Weight-%
Aluminium	2690.01	34.01
Bio Plastics	1408	17.8
Copper	283.76	3.59
Other Plastics	2350.5	29.72
Paint	59.99	0.76
PCB Alu	57.92	0.73
PCB Copper	106.56	1.35
PCB Iron	104.18	1.32
PCB Non-ferrous metal	0.32	0
PCB Support	132.29	1.67
PCB Tin	7.46	0.09
Silica Sand	204.6	2.59
Steel	503.9	6.37

APPENDIX 2

USE PHASE (B6) VALUES FOR DIFFERENT COUNTRY MIX

In this EPD the B6 impact has been calculated using the energy mix of **(EU)**. The table in this appendix is useful for conversion and comparison of B6 values with other country energy mix. The Global Warming Potential Total (GWP tot) value is illustrated for each country. The value refers to 1 kwh.

Example on how to use the table:

If for example this EPD was done according to EU energy mix and you want to see how the GWP total changes according to a Finland country energy mix, you can take the original value in the results table here highlighted in yellow:

ENVIRONMENTAL IMPACT DATA, RESULTS PER DECLARED UNIT

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding threshold values, safety margins or risks.

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total ¹⁾	kg CO ₂ e	1.08E+01	2.33E-01	5.06E-01	1.15E+01	3.27E+00	1.68E+00	ND	ND	ND	ND	ND	4.06E-02	ND	0.00E+00	2.88E-02	5.13E-01	2.80E-01	-9.88E-01

Divide that value according to the EU value from the following table (EU = 3.30E-01) and then multiplying for the Finland value from the same table (FINLAND = 1.54E-01).

Thus, the calculation of this example would be:

New B6 GWP tot for Finland = (4.06E-02 / 3.30E-01) x 1.54E-01 = 1.89E-02.

Country	GWP tot (kg CO2 eq. per kwh)		
AFRICA	7.30E-01	GERMANY	3.90E-01
APAC	9.50E-01	INDIA	1.50E+00
AUSTRALIA	8.40E-01	ITALY	3.50E-01
AUSTRIA	2.30E-01	LATAM	3.90E-01
BELGIUM	2.00E-01	NAM	4.50E-01
CHINA	1.02E+00	NETHERLANDS	3.90E-01
DENMARK	1.60E-01	NORWAY	4.50E-02
EU	3.30E-01	ROW	7.30E-01
FINLAND	1.54E-01	SPAIN	2.10E-01
FRANCE	8.70E-02	SWEDEN	3.70E-02
		UK	2.60E-01

Source Ecoinvent 3.10.1

APPENDIX 3 - EPD HUB ALIGNED

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from a reference variant of a product family, based on various light management scenarios and power inputs of the luminaires within the same product family.

To calculate the Scaled Impact (*SI*), we have followed the below methods:

1. Calculate the power scaling factor (PSF), which is the ratio of the power input of the variant in questions P_{in} and the power input of the base variant P_{base} .

$$PSF = \frac{P_{in}}{P_{base}}$$

2. Calculate the Total Scaling factor by multiplying the PSF by the control scaling factor (CSF), where the CSF is determined according the relevant control factor scenario (e.g. if the luminaire has a presence detection system). The presented controls factors values in Table A1 are based on BS EN 15193-1:2017. Please refer to this publication or contact Signify directly for more information.

$$TSF = PSF * CSF$$

Table 1: Light management function (PEP EcoPassport aligned)

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

3. Lastly, the GWP of the base variant is then scaled by the TSF.

$$\text{Scaled Impact} = \text{GWP}_{\text{case}} * \text{TSF}$$

The following list of product configurations is not exhaustive. Please use the formula defined in point 1 above to calculate the exact power scaling factor (PSF) for any specific configuration.

Table 2: GWP per scaling factor (EPD Hub aligned)

	12NC or Product Family Code	Description	Flux [Lm]	Power [W]	Efficacy [L/W]	PSF	Total Scaling Factor (TSF)				Scaled Impacts (GWP100 B6 - kg CO2eq.)			
							NC	DD	PS	DD+PS	NC	DD	PS	DD+PS
1	BDS562/BRS562/BSS562	LED46-CLO-4S/740	3960	27.0	146.7	0.730	0.730	0.547	0.547	0.401	421.2	315.9	315.9	231.7
2	BDS562/BRS562/BSS562	LED48-CLO-4S/740	4136	28.0	147.7	0.757	0.757	0.568	0.568	0.416	436.8	327.6	327.6	240.2
3	BDS562/BRS562/BSS562	LED56-CLO-4S/740	4752	32.5	146.2	0.878	0.878	0.659	0.659	0.483	507.0	380.3	380.3	278.9
4	BDS562/BRS562/BSS562	LED58-CLO-4S/740	5104	34.0	150.1	0.919	0.919	0.689	0.689	0.505	530.4	397.8	397.8	291.7
5	BDS562/BRS562/BSS562	<u>LED64-CLO-4S/740</u>	5456	37.0	147.5	1.000	1.000	0.750	0.750	0.550	577.2	432.9	432.9	317.5
6	BDS562/BRS562/BSS562	LED70-CLO-4S/740	5984	40.5	147.8	1.095	1.095	0.821	0.821	0.602	631.8	473.9	473.9	347.5
7	BDS562/BRS562/BSS562	LED75-CLO-4S/740	6336	43.0	147.3	1.162	1.162	0.872	0.872	0.639	670.8	503.1	503.1	368.9
8	BDS562/BRS562/BSS562	LED80-CLO-4S/740	6864	46.5	147.6	1.257	1.257	0.943	0.943	0.691	725.4	544.1	544.1	399.0

9	BDS562/BRS562/BSS562	LED88-CLO-4S/740	7568	51.0	148.4	1.378	1.378	1.034	1.034	0.758	795.6	596.7	596.7	437.6
10	BDS562/BRS562/BSS562	LED93-CLO-4S/740	7920	53.0	149.4	1.432	1.432	1.074	1.074	0.788	826.8	620.1	620.1	454.7
11	BDS562/BRS562/BSS562	LED96-CLO-4S/740	8272	54.0	153.2	1.459	1.459	1.095	1.095	0.803	842.4	631.8	631.8	463.3
12	BDS562/BRS562/BSS562	LED100-CLO-4S/740	8624	56.0	154.0	1.514	1.514	1.135	1.135	0.832	873.6	655.2	655.2	480.5
13	BDS562/BRS562/BSS562	LED104-CLO-4S/740	8700	59.0	147.5	1.595	1.595	1.196	1.196	0.877	920.4	690.3	690.3	506.2
14	BDS562/BRS562/BSS562	LED110-CLO-4S/740	9135	62.0	147.3	1.676	1.676	1.257	1.257	0.922	967.2	725.4	725.4	532.0
15	BDS562/BRS562/BSS562	LED116-CLO-4S/740	10005	66.0	151.6	1.784	1.784	1.338	1.338	0.981	1029.6	772.2	772.2	566.3
16	BDS562/BRS562/BSS562	LED120-CLO-4S/740	10005	68.0	147.1	1.838	1.838	1.378	1.378	1.011	1060.8	795.6	795.6	583.4
17	BDS562/BRS562/BSS562	LED125-CLO-4S/740	10440	71.0	147.0	1.919	1.919	1.439	1.439	1.055	1107.6	830.7	830.7	609.2
18	BDS562/BRS562/BSS562	LED130-CLO-4S/740	10875	75.0	145.0	2.027	2.027	1.520	1.520	1.115	1170.0	877.5	877.5	643.5
19	BDS562/BRS562/BSS562	LED135-CLO-4S/740	11310	75.0	150.8	2.027	2.027	1.520	1.520	1.115	1170.0	877.5	877.5	643.5
20	BDS562/BRS562/BSS562	LED140-CLO-4S/740	11745	78.0	150.6	2.108	2.108	1.581	1.581	1.159	1216.8	912.6	912.6	669.2
21	BDS562/BRS562/BSS562	LED145-CLO-4S/740	12180	81.0	150.4	2.189	2.189	1.642	1.642	1.204	1263.6	947.7	947.7	695.0
22	BDS562/BRS562/BSS562	LED150-CLO-4S/740	12470	84.0	148.5	2.270	2.270	1.703	1.703	1.249	1310.4	982.8	982.8	720.7
23	BDS562/BRS562/BSS562	LED160-CLO-4S/740	13330	90.0	148.1	2.432	2.432	1.824	1.824	1.338	1404.0	1053.0	1053.0	772.2

24	BDS562/BRS562/BSS562	LED170-CLO-4S/740	14190	95.0	149.4	2.568	2.568	1.926	1.926	1.412	1482.0	1111.5	1111.5	815.1
25	BDS562/BRS562/BSS562	LED180-CLO-4S/740	15050	102.0	147.5	2.757	2.757	2.068	2.068	1.516	1591.2	1193.4	1193.4	875.2
26	BDS562/BRS562/BSS562	LED190-CLO-4S/740	15480	106.0	146.0	2.865	2.865	2.149	2.149	1.576	1653.6	1240.2	1240.2	909.5
27	BDS562/BRS562/BSS562	LED200-CLO-4S/740	16340	114.0	143.3	3.081	3.081	2.311	2.311	1.695	1778.4	1333.8	1333.8	978.1
28	BDS562/BRS562/BSS562	LED46-CLO-4S/730	3960	28.5	138.9	0.770	0.770	0.578	0.578	0.424	444.6	333.5	333.5	244.5
29	BDS562/BRS562/BSS562	LED48-CLO-4S/730	4183	29.5	141.8	0.797	0.797	0.598	0.598	0.439	460.2	345.2	345.2	253.1
30	BDS562/BRS562/BSS562	LED56-CLO-4S/730	4752	34.5	137.7	0.932	0.932	0.699	0.699	0.513	538.2	403.7	403.7	296.0
31	BDS562/BRS562/BSS562	LED58-CLO-4S/730	4928	35.5	138.8	0.959	0.959	0.720	0.720	0.528	553.8	415.4	415.4	304.6
32	BDS562/BRS562/BSS562	LED64-CLO-4S/730	5456	39.0	139.9	1.054	1.054	0.791	0.791	0.580	608.4	456.3	456.3	334.6
33	BDS562/BRS562/BSS562	LED70-CLO-4S/730	5984	42.5	140.8	1.149	1.149	0.861	0.861	0.632	663.0	497.3	497.3	364.7
34	BDS562/BRS562/BSS562	LED75-CLO-4S/730	6336	46.0	137.7	1.243	1.243	0.932	0.932	0.684	717.6	538.2	538.2	394.7
35	BDS562/BRS562/BSS562	LED80-CLO-4S/730	6864	49.5	138.7	1.338	1.338	1.003	1.003	0.736	772.2	579.2	579.2	424.7
36	BDS562/BRS562/BSS562	LED88-CLO-4S/730	7482	54.0	138.6	1.459	1.459	1.095	1.095	0.803	842.4	631.8	631.8	463.3
37	BDS562/BRS562/BSS562	LED93-CLO-4S/730	7920	56.0	141.4	1.514	1.514	1.135	1.135	0.832	873.6	655.2	655.2	480.5
38	BDS562/BRS562/BSS562	LED96-CLO-4S/730	8178	58.0	141.0	1.568	1.568	1.176	1.176	0.862	904.8	678.6	678.6	497.6

39	BDS562/BRS562/BSS562	LED100-CLO-4S/730	8448	60.0	140.8	1.622	1.622	1.216	1.216	0.892	936.0	702.0	702.0	514.8
40	BDS562/BRS562/BSS562	LED104-CLO-4S/730	8700	62.0	140.3	1.676	1.676	1.257	1.257	0.922	967.2	725.4	725.4	532.0
41	BDS562/BRS562/BSS562	LED110-CLO-4S/730	9135	66.0	138.4	1.784	1.784	1.338	1.338	0.981	1029.6	772.2	772.2	566.3
42	BDS562/BRS562/BSS562	LED116-CLO-4S/730	10005	70.0	142.9	1.892	1.892	1.419	1.419	1.041	1092.0	819.0	819.0	600.6
43	BDS562/BRS562/BSS562	LED120-CLO-4S/730	10005	73.0	137.1	1.973	1.973	1.480	1.480	1.085	1138.8	854.1	854.1	626.3
44	BDS562/BRS562/BSS562	LED125-CLO-4S/730	10440	76.0	137.4	2.054	2.054	1.541	1.541	1.130	1185.6	889.2	889.2	652.1
45	BDS562/BRS562/BSS562	LED130-CLO-4S/730	10875	78.0	139.4	2.108	2.108	1.581	1.581	1.159	1216.8	912.6	912.6	669.2
46	BDS562/BRS562/BSS562	LED135-CLO-4S/730	11310	80.0	141.4	2.162	2.162	1.622	1.622	1.189	1248.0	936.0	936.0	686.4
47	BDS562/BRS562/BSS562	LED140-CLO-4S/730	11610	83.0	139.9	2.243	2.243	1.682	1.682	1.234	1294.8	971.1	971.1	712.1
48	BDS562/BRS562/BSS562	LED145-CLO-4S/730	12040	86.0	140.0	2.324	2.324	1.743	1.743	1.278	1341.6	1006.2	1006.2	737.9
49	BDS562/BRS562/BSS562	LED150-CLO-4S/730	12470	89.0	140.1	2.405	2.405	1.804	1.804	1.323	1388.4	1041.3	1041.3	763.6
50	BDS562/BRS562/BSS562	LED160-CLO-4S/730	13330	95.0	140.3	2.568	2.568	1.926	1.926	1.412	1482.0	1111.5	1111.5	815.1
51	BDS562/BRS562/BSS562	LED170-CLO-4S/730	14190	102.0	139.1	2.757	2.757	2.068	2.068	1.516	1591.2	1193.4	1193.4	875.2
52	BDS562/BRS562/BSS562	LED180-CLO-4S/730	15050	108.0	139.4	2.919	2.919	2.189	2.189	1.605	1684.8	1263.6	1263.6	926.6
53	BDS562/BRS562/BSS562	LED190-CLO-4S/730	15480	114.0	135.8	3.081	3.081	2.311	2.311	1.695	1778.4	1333.8	1333.8	978.1

54	BDS562/BRS562/BSS562	LED200-CLO-4S/730	16150	120.0	134.6	3.243	3.243	2.432	2.432	1.784	1872.0	1404.0	1404.0	1029.6
55	BDS562/BRS562/BSS562	LED40-CLO-4S/727	3432	27.5	124.8	0.743	0.743	0.557	0.557	0.409	429.0	321.8	321.8	236.0
56	BDS562/BRS562/BSS562	LED46-CLO-4S/727	3960	31.5	125.7	0.851	0.851	0.639	0.639	0.468	491.4	368.6	368.6	270.3
57	BDS562/BRS562/BSS562	LED48-CLO-4S/727	4136	33.0	125.3	0.892	0.892	0.669	0.669	0.491	514.8	386.1	386.1	283.1
58	BDS562/BRS562/BSS562	LED56-CLO-4S/727	4752	38.0	125.1	1.027	1.027	0.770	0.770	0.565	592.8	444.6	444.6	326.0
59	BDS562/BRS562/BSS562	LED58-CLO-4S/727	4928	39.5	124.8	1.068	1.068	0.801	0.801	0.587	616.2	462.2	462.2	338.9
60	BDS562/BRS562/BSS562	LED64-CLO-4S/727	5394	43.5	124.0	1.176	1.176	0.882	0.882	0.647	678.6	509.0	509.0	373.2
61	BDS562/BRS562/BSS562	LED70-CLO-4S/727	5916	47.5	124.5	1.284	1.284	0.963	0.963	0.706	741.0	555.8	555.8	407.6
62	BDS562/BRS562/BSS562	LED75-CLO-4S/727	6264	51.0	122.8	1.378	1.378	1.034	1.034	0.758	795.6	596.7	596.7	437.6
63	BDS562/BRS562/BSS562	LED80-CLO-4S/727	6786	55.0	123.4	1.486	1.486	1.115	1.115	0.818	858.0	643.5	643.5	471.9
64	BDS562/BRS562/BSS562	LED88-CLO-4S/727	7224	60.0	120.4	1.622	1.622	1.216	1.216	0.892	936.0	702.0	702.0	514.8
65	BDS562/BRS562/BSS562	LED93-CLO-4S/727	7830	62.0	126.3	1.676	1.676	1.257	1.257	0.922	967.2	725.4	725.4	532.0
66	BDS562/BRS562/BSS562	LED96-CLO-4S/727	8178	64.0	127.8	1.730	1.730	1.297	1.297	0.951	998.4	748.8	748.8	549.1
67	BDS562/BRS562/BSS562	LED100-CLO-4S/727	8428	67.0	125.8	1.811	1.811	1.358	1.358	0.996	1045.2	783.9	783.9	574.9
68	BDS562/BRS562/BSS562	LED104-CLO-4S/727	8600	70.0	122.9	1.892	1.892	1.419	1.419	1.041	1092.0	819.0	819.0	600.6

69	BDS562/BRS562/BSS562	LED110-CLO-4S/727	9030	74.0	122.0	2.000	2.000	1.500	1.500	1.100	1154.4	865.8	865.8	634.9
70	BDS562/BRS562/BSS562	LED116-CLO-4S/727	9460	78.0	121.3	2.108	2.108	1.581	1.581	1.159	1216.8	912.6	912.6	669.2
71	BDS562/BRS562/BSS562	LED120-CLO-4S/727	9890	81.0	122.1	2.189	2.189	1.642	1.642	1.204	1263.6	947.7	947.7	695.0
72	BDS562/BRS562/BSS562	LED125-CLO-4S/727	10320	84.0	122.9	2.270	2.270	1.703	1.703	1.249	1310.4	982.8	982.8	720.7
73	BDS562/BRS562/BSS562	LED130-CLO-4S/727	10750	88.0	122.2	2.378	2.378	1.784	1.784	1.308	1372.8	1029.6	1029.6	755.0
74	BDS562/BRS562/BSS562	LED135-CLO-4S/727	11180	89.0	125.6	2.405	2.405	1.804	1.804	1.323	1388.4	1041.3	1041.3	763.6
75	BDS562/BRS562/BSS562	LED140-CLO-4S/727	11610	92.0	126.2	2.486	2.486	1.865	1.865	1.368	1435.2	1076.4	1076.4	789.4
76	BDS562/BRS562/BSS562	LED145-CLO-4S/727	12040	95.0	126.7	2.568	2.568	1.926	1.926	1.412	1482.0	1111.5	1111.5	815.1
77	BDS562/BRS562/BSS562	LED150-CLO-4S/727	12470	99.0	126.0	2.676	2.676	2.007	2.007	1.472	1544.4	1158.3	1158.3	849.4
78	BDS562/BRS562/BSS562	LED160-CLO-4S/727	13175	106.0	124.3	2.865	2.865	2.149	2.149	1.576	1653.6	1240.2	1240.2	909.5
79	BDS562/BRS562/BSS562	LED170-CLO-4S/727	14025	114.0	123.0	3.081	3.081	2.311	2.311	1.695	1778.4	1333.8	1333.8	978.1
80	BDS562/BRS562/BSS562	LED180-CLO-4S/727	14280	120.0	119.0	3.243	3.243	2.432	2.432	1.784	1872.0	1404.0	1404.0	1029.6
81	BDS562/BRS562/BSS562	LED40-CLO-4S/722	3432	32.0	107.3	0.865	0.865	0.649	0.649	0.476	499.2	374.4	374.4	274.6
82	BDS562/BRS562/BSS562	LED46-CLO-4S/722	3960	36.5	108.5	0.986	0.986	0.740	0.740	0.543	569.4	427.1	427.1	313.2
83	BDS562/BRS562/BSS562	LED48-CLO-4S/722	4136	38.0	108.8	1.027	1.027	0.770	0.770	0.565	592.8	444.6	444.6	326.0

84	BDS562/BRS562/BSS562	LED56-CLO-4S/722	4752	44.0	108.0	1.189	1.189	0.892	0.892	0.654	686.4	514.8	514.8	377.5
85	BDS562/BRS562/BSS562	LED58-CLO-4S/722	4928	46.0	107.1	1.243	1.243	0.932	0.932	0.684	717.6	538.2	538.2	394.7
86	BDS562/BRS562/BSS562	LED64-CLO-4S/722	5456	51.0	107.0	1.378	1.378	1.034	1.034	0.758	795.6	596.7	596.7	437.6
87	BDS562/BRS562/BSS562	LED70-CLO-4S/722	5916	56.0	105.6	1.514	1.514	1.135	1.135	0.832	873.6	655.2	655.2	480.5
88	BDS562/BRS562/BSS562	LED75-CLO-4S/722	6264	58.0	108.0	1.568	1.568	1.176	1.176	0.862	904.8	678.6	678.6	497.6
89	BDS562/BRS562/BSS562	LED80-CLO-4S/722	6786	62.0	109.5	1.676	1.676	1.257	1.257	0.922	967.2	725.4	725.4	532.0
90	BDS562/BRS562/BSS562	LED88-CLO-4S/722	7482	69.0	108.4	1.865	1.865	1.399	1.399	1.026	1076.4	807.3	807.3	592.0
91	BDS562/BRS562/BSS562	LED93-CLO-4S/722	7830	73.0	107.3	1.973	1.973	1.480	1.480	1.085	1138.8	854.1	854.1	626.3
92	BDS562/BRS562/BSS562	LED96-CLO-4S/722	8178	75.0	109.0	2.027	2.027	1.520	1.520	1.115	1170.0	877.5	877.5	643.5
93	BDS562/BRS562/BSS562	LED100-CLO-4S/722	8526	77.0	110.7	2.081	2.081	1.561	1.561	1.145	1201.2	900.9	900.9	660.7
94	BDS562/BRS562/BSS562	LED104-CLO-4S/722	8700	80.0	108.8	2.162	2.162	1.622	1.622	1.189	1248.0	936.0	936.0	686.4
95	BDS562/BRS562/BSS562	LED110-CLO-4S/722	9135	84.0	108.8	2.270	2.270	1.703	1.703	1.249	1310.4	982.8	982.8	720.7
96	BDS562/BRS562/BSS562	LED116-CLO-4S/722	9890	89.0	111.1	2.405	2.405	1.804	1.804	1.323	1388.4	1041.3	1041.3	763.6
97	BDS562/BRS562/BSS562	LED120-CLO-4S/722	9890	92.0	107.5	2.486	2.486	1.865	1.865	1.368	1435.2	1076.4	1076.4	789.4
98	BDS562/BRS562/BSS562	LED125-CLO-4S/722	10320	96.0	107.5	2.595	2.595	1.946	1.946	1.427	1497.6	1123.2	1123.2	823.7

99	BDS562/BRS562/BSS562	LED130-CLO-4S/722	10750	100.0	107.5	2.703	2.703	2.027	2.027	1.486	1560.0	1170.0	1170.0	858.0
100	BDS562/BRS562/BSS562	LED135-CLO-4S/722	11180	104.0	107.5	2.811	2.811	2.108	2.108	1.546	1622.4	1216.8	1216.8	892.3

PEP ECOPASSPORT ALIGNED

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from a reference variant of a product family, based on various light management functions, the lumen output (O_{lum}) and reference service life (RSL) of each product within the same product family.

To calculate the Scaled Impact ($S_{I_{pep}}$), we have followed the below methods:

1. Calculate the power scaling factor (PSF), which is the ratio of the power input of the variant in questions P_{in} and the power input of the base variant P_{base} .

$$PSF = \frac{P_{in}}{P_{base}}$$

2. Using this scaled GWP, we then can apply the PEP Ecopassport method for calculating the environmental impact of the functional unit for a luminary (1000 lumens over 35000 hours), applied to B6, where the Functional Unit application considers the lumen output (O_{lum}) and reference service lifetime (RSL) of the product to estimate the final environmental impact. The scaled impact ($S_{I_{pep}}$) is presented in Table A4.

$$GSF = \frac{FU_{pep}}{FU_p} = \frac{1,000}{O_{lum}} * \frac{35,000}{RSL}$$

3. Calculate the GWP scaling factor ($PGSF$), by multiplying the PSF by the GSF.

$$PGSF = PSF * GSF$$

- Calculate the Total Scaling factor by multiplying the PSF by the control scaling factor (CSF), where the CSF is determined according the relevant control factor scenario (e.g. if the luminaire has a presence detection system), as presented in Table A1.

$$TSF = PGSF * CSF$$

Table 3: Light management functions (PEP EcoPassport aligned)

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

- Lastly, the GWP of the base variant is then scaled by the TSF.

$$Scaled\ GWP = GWP_{case} * TSF$$

Table 4: Impact per scaling factor (PEP EcoPassport aligned)

	12NC or Product Family Code	Description	Flux [Lm]	Power [W]	Efficacy [L/W]	PSF	Total Scaling Factor (TSF)				Scaled Impacts (GWP100 B6 - kg CO2eq.)			
							NC	DD	PS	DD+PS	NC	DD	PS	DD+PS
1	BDS562/BRSS562/BSS562	LED46-CLO-4S/740	3960	27.0	146.7	0.730	0.064	0.048	0.048	0.035	37.2	27.9	27.9	20.5
2	BDS562/BRSS562/BSS562	LED48-CLO-4S/740	4136	28.0	147.7	0.757	0.064	0.048	0.048	0.035	37.0	27.7	27.7	20.3
3	BDS562/BRSS562/BSS562	LED56-CLO-4S/740	4752	32.5	146.2	0.878	0.065	0.049	0.049	0.036	37.3	28.0	28.0	20.5
4	BDS562/BRSS562/BSS562	LED58-CLO-4S/740	5104	34.0	150.1	0.919	0.063	0.047	0.047	0.035	36.4	27.3	27.3	20.0
5	BDS562/BRSS562/BSS562	<u>LED64-CLO-4S/740</u>	5456	37.0	147.5	1.000	0.064	0.048	0.048	0.035	37.0	27.8	27.8	20.4
6	BDS562/BRSS562/BSS562	LED70-CLO-4S/740	5984	40.5	147.8	1.095	0.064	0.048	0.048	0.035	37.0	27.7	27.7	20.3
7	BDS562/BRSS562/BSS562	LED75-CLO-4S/740	6336	43.0	147.3	1.162	0.064	0.048	0.048	0.035	37.1	27.8	27.8	20.4
8	BDS562/BRSS562/BSS562	LED80-CLO-4S/740	6864	46.5	147.6	1.3	0.1	0.0	0.0	0.0	37.0	27.7	27.7	20.3
9	BDS562/BRSS562/BSS562	LED88-CLO-4S/740	7568	51.0	148.4	1.4	0.1	0.0	0.0	0.0	36.8	27.6	27.6	20.2
10	BDS562/BRSS562/BSS562	LED93-CLO-4S/740	7920	53.0	149.4	1.4	0.1	0.0	0.0	0.0	36.5	27.4	27.4	20.1
11	BDS562/BRSS562/BSS562	LED96-CLO-4S/740	8272	54.0	153.2	1.5	0.1	0.0	0.0	0.0	35.6	26.7	26.7	19.6
12	BDS562/BRSS562/BSS562	LED100-CLO-4S/740	8624	56.0	154.0	1.5	0.1	0.0	0.0	0.0	35.5	26.6	26.6	19.5

13	BDS562/BRSS562/BSS562	LED104-CLO-4S/740	8700	59.0	147.5	1.6	0.1	0.0	0.0	0.0	37.0	27.8	27.8	20.4
14	BDS562/BRSS562/BSS562	LED110-CLO-4S/740	9135	62.0	147.3	1.7	0.1	0.0	0.0	0.0	37.1	27.8	27.8	20.4
15	BDS562/BRSS562/BSS562	LED116-CLO-4S/740	10005	66.0	151.6	1.8	0.1	0.0	0.0	0.0	36.0	27.0	27.0	19.8
16	BDS562/BRSS562/BSS562	LED120-CLO-4S/740	10005	68.0	147.1	1.8	0.1	0.0	0.0	0.0	37.1	27.8	27.8	20.4
17	BDS562/BRSS562/BSS562	LED125-CLO-4S/740	10440	71.0	147.0	1.9	0.1	0.0	0.0	0.0	37.1	27.8	27.8	20.4
18	BDS562/BRSS562/BSS562	LED130-CLO-4S/740	10875	75.0	145.0	2.0	0.1	0.0	0.0	0.0	37.7	28.2	28.2	20.7
19	BDS562/BRSS562/BSS562	LED135-CLO-4S/740	11310	75.0	150.8	2.0	0.1	0.0	0.0	0.0	36.2	27.2	27.2	19.9
20	BDS562/BRSS562/BSS562	LED140-CLO-4S/740	11745	78.0	150.6	2.1	0.1	0.0	0.0	0.0	36.3	27.2	27.2	19.9
21	BDS562/BRSS562/BSS562	LED145-CLO-4S/740	12180	81.0	150.4	2.2	0.1	0.0	0.0	0.0	36.3	27.2	27.2	20.0
22	BDS562/BRSS562/BSS562	LED150-CLO-4S/740	12470	84.0	148.5	2.3	0.1	0.0	0.0	0.0	36.8	27.6	27.6	20.2
23	BDS562/BRSS562/BSS562	LED160-CLO-4S/740	13330	90.0	148.1	2.4	0.1	0.0	0.0	0.0	36.9	27.6	27.6	20.3
24	BDS562/BRSS562/BSS562	LED170-CLO-4S/740	14190	95.0	149.4	2.6	0.1	0.0	0.0	0.0	36.6	27.4	27.4	20.1
25	BDS562/BRSS562/BSS562	LED180-CLO-4S/740	15050	102.0	147.5	2.8	0.1	0.0	0.0	0.0	37.0	27.8	27.8	20.4
26	BDS562/BRSS562/BSS562	LED190-CLO-4S/740	15480	106.0	146.0	2.9	0.1	0.0	0.0	0.0	37.4	28.0	28.0	20.6
27	BDS562/BRSS562/BSS562	LED200-CLO-4S/740	16340	114.0	143.3	3.1	0.1	0.0	0.0	0.0	38.1	28.6	28.6	21.0

28	BDS562/BRSS562/BSS562	LED46-CLO-4S/730	3960	28.5	138.9	0.8	0.1	0.1	0.1	0.0	39.3	29.5	29.5	21.6
29	BDS562/BRSS562/BSS562	LED48-CLO-4S/730	4183	29.5	141.8	0.8	0.1	0.1	0.1	0.0	38.5	28.9	28.9	21.2
30	BDS562/BRSS562/BSS562	LED56-CLO-4S/730	4752	34.5	137.7	0.9	0.1	0.1	0.1	0.0	39.6	29.7	29.7	21.8
31	BDS562/BRSS562/BSS562	LED58-CLO-4S/730	4928	35.5	138.8	1.0	0.1	0.1	0.1	0.0	39.3	29.5	29.5	21.6
32	BDS562/BRSS562/BSS562	LED64-CLO-4S/730	5456	39.0	139.9	1.1	0.1	0.1	0.1	0.0	39.0	29.3	29.3	21.5
33	BDS562/BRSS562/BSS562	LED70-CLO-4S/730	5984	42.5	140.8	1.1	0.1	0.1	0.1	0.0	38.8	29.1	29.1	21.3
34	BDS562/BRSS562/BSS562	LED75-CLO-4S/730	6336	46.0	137.7	1.2	0.1	0.1	0.1	0.0	39.6	29.7	29.7	21.8
35	BDS562/BRSS562/BSS562	LED80-CLO-4S/730	6864	49.5	138.7	1.3	0.1	0.1	0.1	0.0	39.4	29.5	29.5	21.7
36	BDS562/BRSS562/BSS562	LED88-CLO-4S/730	7482	54.0	138.6	1.5	0.1	0.1	0.1	0.0	39.4	29.6	29.6	21.7
37	BDS562/BRSS562/BSS562	LED93-CLO-4S/730	7920	56.0	141.4	1.5	0.1	0.1	0.1	0.0	38.6	29.0	29.0	21.2
38	BDS562/BRSS562/BSS562	LED96-CLO-4S/730	8178	58.0	141.0	1.6	0.1	0.1	0.1	0.0	38.7	29.0	29.0	21.3
39	BDS562/BRSS562/BSS562	LED100-CLO-4S/730	8448	60.0	140.8	1.6	0.1	0.1	0.1	0.0	38.8	29.1	29.1	21.3
40	BDS562/BRSS562/BSS562	LED104-CLO-4S/730	8700	62.0	140.3	1.7	0.1	0.1	0.1	0.0	38.9	29.2	29.2	21.4
41	BDS562/BRSS562/BSS562	LED110-CLO-4S/730	9135	66.0	138.4	1.8	0.1	0.1	0.1	0.0	39.4	29.6	29.6	21.7
42	BDS562/BRSS562/BSS562	LED116-CLO-4S/730	10005	70.0	142.9	1.9	0.1	0.0	0.0	0.0	38.2	28.7	28.7	21.0

43	BDS562/BRSS562/BSS562	LED120-CLO-4S/730	10005	73.0	137.1	2.0	0.1	0.1	0.1	0.0	39.8	29.9	29.9	21.9
44	BDS562/BRSS562/BSS562	LED125-CLO-4S/730	10440	76.0	137.4	2.1	0.1	0.1	0.1	0.0	39.7	29.8	29.8	21.9
45	BDS562/BRSS562/BSS562	LED130-CLO-4S/730	10875	78.0	139.4	2.1	0.1	0.1	0.1	0.0	39.2	29.4	29.4	21.5
46	BDS562/BRSS562/BSS562	LED135-CLO-4S/730	11310	80.0	141.4	2.2	0.1	0.1	0.1	0.0	38.6	29.0	29.0	21.2
47	BDS562/BRSS562/BSS562	LED140-CLO-4S/730	11610	83.0	139.9	2.2	0.1	0.1	0.1	0.0	39.0	29.3	29.3	21.5
48	BDS562/BRSS562/BSS562	LED145-CLO-4S/730	12040	86.0	140.0	2.3	0.1	0.1	0.1	0.0	39.0	29.3	29.3	21.5
49	BDS562/BRSS562/BSS562	LED150-CLO-4S/730	12470	89.0	140.1	2.4	0.1	0.1	0.1	0.0	39.0	29.2	29.2	21.4
50	BDS562/BRSS562/BSS562	LED160-CLO-4S/730	13330	95.0	140.3	2.6	0.1	0.1	0.1	0.0	38.9	29.2	29.2	21.4
51	BDS562/BRSS562/BSS562	LED170-CLO-4S/730	14190	102.0	139.1	2.8	0.1	0.1	0.1	0.0	39.2	29.4	29.4	21.6
52	BDS562/BRSS562/BSS562	LED180-CLO-4S/730	15050	108.0	139.4	2.9	0.1	0.1	0.1	0.0	39.2	29.4	29.4	21.5
53	BDS562/BRSS562/BSS562	LED190-CLO-4S/730	15480	114.0	135.8	3.1	0.1	0.1	0.1	0.0	40.2	30.2	30.2	22.1
54	BDS562/BRSS562/BSS562	LED200-CLO-4S/730	16150	120.0	134.6	3.2	0.1	0.1	0.1	0.0	40.6	30.4	30.4	22.3
55	BDS562/BRSS562/BSS562	LED40-CLO-4S/727	3432	27.5	124.8	0.7	0.1	0.1	0.1	0.0	43.8	32.8	32.8	24.1
56	BDS562/BRSS562/BSS562	LED46-CLO-4S/727	3960	31.5	125.7	0.9	0.1	0.1	0.1	0.0	43.4	32.6	32.6	23.9
57	BDS562/BRSS562/BSS562	LED48-CLO-4S/727	4136	33.0	125.3	0.9	0.1	0.1	0.1	0.0	43.6	32.7	32.7	24.0

58	BDS562/BRSS562/BSS562	LED56-CLO-4S/727	4752	38.0	125.1	1.0	0.1	0.1	0.1	0.0	43.7	32.7	32.7	24.0
59	BDS562/BRSS562/BSS562	LED58-CLO-4S/727	4928	39.5	124.8	1.1	0.1	0.1	0.1	0.0	43.8	32.8	32.8	24.1
60	BDS562/BRSS562/BSS562	LED64-CLO-4S/727	5394	43.5	124.0	1.2	0.1	0.1	0.1	0.0	44.0	33.0	33.0	24.2
61	BDS562/BRSS562/BSS562	LED70-CLO-4S/727	5916	47.5	124.5	1.3	0.1	0.1	0.1	0.0	43.8	32.9	32.9	24.1
62	BDS562/BRSS562/BSS562	LED75-CLO-4S/727	6264	51.0	122.8	1.4	0.1	0.1	0.1	0.0	44.5	33.3	33.3	24.4
63	BDS562/BRSS562/BSS562	LED80-CLO-4S/727	6786	55.0	123.4	1.5	0.1	0.1	0.1	0.0	44.3	33.2	33.2	24.3
64	BDS562/BRSS562/BSS562	LED88-CLO-4S/727	7224	60.0	120.4	1.6	0.1	0.1	0.1	0.0	45.3	34.0	34.0	24.9
65	BDS562/BRSS562/BSS562	LED93-CLO-4S/727	7830	62.0	126.3	1.7	0.1	0.1	0.1	0.0	43.2	32.4	32.4	23.8
66	BDS562/BRSS562/BSS562	LED96-CLO-4S/727	8178	64.0	127.8	1.7	0.1	0.1	0.1	0.0	42.7	32.0	32.0	23.5
67	BDS562/BRSS562/BSS562	LED100-CLO-4S/727	8428	67.0	125.8	1.8	0.1	0.1	0.1	0.0	43.4	32.6	32.6	23.9
68	BDS562/BRSS562/BSS562	LED104-CLO-4S/727	8600	70.0	122.9	1.9	0.1	0.1	0.1	0.0	44.4	33.3	33.3	24.4
69	BDS562/BRSS562/BSS562	LED110-CLO-4S/727	9030	74.0	122.0	2.0	0.1	0.1	0.1	0.0	44.7	33.6	33.6	24.6
70	BDS562/BRSS562/BSS562	LED116-CLO-4S/727	9460	78.0	121.3	2.1	0.1	0.1	0.1	0.0	45.0	33.8	33.8	24.8
71	BDS562/BRSS562/BSS562	LED120-CLO-4S/727	9890	81.0	122.1	2.2	0.1	0.1	0.1	0.0	44.7	33.5	33.5	24.6
72	BDS562/BRSS562/BSS562	LED125-CLO-4S/727	10320	84.0	122.9	2.3	0.1	0.1	0.1	0.0	44.4	33.3	33.3	24.4

73	BDS562/BRSS562/BSS562	LED130-CLO-4S/727	10750	88.0	122.2	2.4	0.1	0.1	0.1	0.0	44.7	33.5	33.5	24.6
74	BDS562/BRSS562/BSS562	LED135-CLO-4S/727	11180	89.0	125.6	2.4	0.1	0.1	0.1	0.0	43.5	32.6	32.6	23.9
75	BDS562/BRSS562/BSS562	LED140-CLO-4S/727	11610	92.0	126.2	2.5	0.1	0.1	0.1	0.0	43.3	32.4	32.4	23.8
76	BDS562/BRSS562/BSS562	LED145-CLO-4S/727	12040	95.0	126.7	2.6	0.1	0.1	0.1	0.0	43.1	32.3	32.3	23.7
77	BDS562/BRSS562/BSS562	LED150-CLO-4S/727	12470	99.0	126.0	2.7	0.1	0.1	0.1	0.0	43.3	32.5	32.5	23.8
78	BDS562/BRSS562/BSS562	LED160-CLO-4S/727	13175	106.0	124.3	2.9	0.1	0.1	0.1	0.0	43.9	32.9	32.9	24.2
79	BDS562/BRSS562/BSS562	LED170-CLO-4S/727	14025	114.0	123.0	3.1	0.1	0.1	0.1	0.0	44.4	33.3	33.3	24.4
80	BDS562/BRSS562/BSS562	LED180-CLO-4S/727	14280	120.0	119.0	3.2	0.1	0.1	0.1	0.0	45.9	34.4	34.4	25.2
81	BDS562/BRSS562/BSS562	LED40-CLO-4S/722	3432	32.0	107.3	0.9	0.1	0.1	0.1	0.0	50.9	38.2	38.2	28.0
82	BDS562/BRSS562/BSS562	LED46-CLO-4S/722	3960	36.5	108.5	1.0	0.1	0.1	0.1	0.0	50.3	37.7	37.7	27.7
83	BDS562/BRSS562/BSS562	LED48-CLO-4S/722	4136	38.0	108.8	1.0	0.1	0.1	0.1	0.0	50.2	37.6	37.6	27.6
84	BDS562/BRSS562/BSS562	LED56-CLO-4S/722	4752	44.0	108.0	1.2	0.1	0.1	0.1	0.0	50.6	37.9	37.9	27.8
85	BDS562/BRSS562/BSS562	LED58-CLO-4S/722	4928	46.0	107.1	1.2	0.1	0.1	0.1	0.0	51.0	38.2	38.2	28.0
86	BDS562/BRSS562/BSS562	LED64-CLO-4S/722	5456	51.0	107.0	1.4	0.1	0.1	0.1	0.0	51.0	38.3	38.3	28.1
87	BDS562/BRSS562/BSS562	LED70-CLO-4S/722	5916	56.0	105.6	1.5	0.1	0.1	0.1	0.0	51.7	38.8	38.8	28.4

88	BDS562/BRSS562/BSS562	LED75-CLO-4S/722	6264	58.0	108.0	1.6	0.1	0.1	0.1	0.0	50.6	37.9	37.9	27.8
89	BDS562/BRSS562/BSS562	LED80-CLO-4S/722	6786	62.0	109.5	1.7	0.1	0.1	0.1	0.0	49.9	37.4	37.4	27.4
90	BDS562/BRSS562/BSS562	LED88-CLO-4S/722	7482	69.0	108.4	1.9	0.1	0.1	0.1	0.0	50.4	37.8	37.8	27.7
91	BDS562/BRSS562/BSS562	LED93-CLO-4S/722	7830	73.0	107.3	2.0	0.1	0.1	0.1	0.0	50.9	38.2	38.2	28.0
92	BDS562/BRSS562/BSS562	LED96-CLO-4S/722	8178	75.0	109.0	2.0	0.1	0.1	0.1	0.0	50.1	37.6	37.6	27.5
93	BDS562/BRSS562/BSS562	LED100-CLO-4S/722	8526	77.0	110.7	2.1	0.1	0.1	0.1	0.0	49.3	37.0	37.0	27.1
94	BDS562/BRSS562/BSS562	LED104-CLO-4S/722	8700	80.0	108.8	2.2	0.1	0.1	0.1	0.0	50.2	37.7	37.7	27.6
95	BDS562/BRSS562/BSS562	LED110-CLO-4S/722	9135	84.0	108.8	2.3	0.1	0.1	0.1	0.0	50.2	37.7	37.7	27.6
96	BDS562/BRSS562/BSS562	LED116-CLO-4S/722	9890	89.0	111.1	2.4	0.1	0.1	0.1	0.0	49.1	36.9	36.9	27.0
97	BDS562/BRSS562/BSS562	LED120-CLO-4S/722	9890	92.0	107.5	2.5	0.1	0.1	0.1	0.0	50.8	38.1	38.1	27.9
98	BDS562/BRSS562/BSS562	LED125-CLO-4S/722	10320	96.0	107.5	2.6	0.1	0.1	0.1	0.0	50.8	38.1	38.1	27.9
99	BDS562/BRSS562/BSS562	LED130-CLO-4S/722	10750	100.0	107.5	2.7	0.1	0.1	0.1	0.0	50.8	38.1	38.1	27.9
100	BDS562/BRSS562/BSS562	LED135-CLO-4S/722	11180	104.0	107.5	2.8	0.1	0.1	0.1	0.0	50.8	38.1	38.1	27.9