



ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH EN 15804+A2 & ISO 14025

CitySwan LED gen3 large BDS/BSS639

Signify N.V.



EPD HUB, HUB-5608

Published on 05.03.2026, last updated on 05.03.2026, valid until 05.03.2031

MANUFACTURER AND SITE

Manufacturer	Signify N.V.
Address	High Tech Campus 48, 5656 AE Eindhoven, The Netherlands
Contact details	sustainability@signify.com
Website	https://www.signify.com/global
Place of production	COPENHAGEN, DENMARK
Place(s) of raw material origin	APAC, EU
Place(s) of installation and use	DENMARK
Period for data	Calendar Year 2023

EPD STANDARDS, SCOPE AND VERIFICATION

Program operator	EPD Hub, hub@epdhub.com
Reference standard	EN 15804:2012+A2:2019/AC:2021 and ISO 14025
PCR	EPD Hub Core PCR version 1.2, 24 Mar 2025
Sector	Electrical product
Category of EPD	Third party verified EPD
Scope of the EPD	Cradle to gate with options, A4-A5, B6, and modules C1-C4, D
EPD author	Signify / Sustainability
EPD verification	Independent verification of this EPD and data, according to ISO 14025: <input type="checkbox"/> Internal verification <input checked="" type="checkbox"/> External verification
EPD verifier	Imane Uald Lamkaddam as an authorized verifier for EPD Hub

PRODUCT SPECIFICATION

Product name	CitySwan LED gen3 large BDS/BSS639
Product number / reference	919008636281 / BDS639 LED70/830 II MDM GW CLO SRTB C10K
GTIN (Global Trade Item Number)	Not applicable
NOBB (Norwegian Building Product Database)	Not applicable
A1-A3 Specific data (%)	7.26

PRODUCT DESCRIPTION

The beautiful CitySwan LED Gen3 luminaire was designed by Danish architects Bjarne Schläger and Morten Weeke Borup. With minimal materials, clean lines, and a white opal ‘lampshade’, the CitySwan LED Gen3 offers a discreet yet noticeable presence in any city environment. At night, its patented glowing light technology highlights the luminaire’s design while illuminating streets and spaces with soft, functional light that blends harmoniously with its surroundings. The CitySwan LED Gen3 can also create colorful light moods to emphasize local identity or provide urban spaces with an innovative atmosphere. Featuring our latest LED technology, flexible mounting options, and smart connectivity through System Ready (SR) Zhaga-D4i sockets—ready to pair with advanced control and lighting software applications such as Interact—it is a future-proof solution for modern cities. To reduce its carbon footprint, the canopy is made of bio-based plastic, and the main metal components are manufactured from recycled aluminum.

This EPD is intended for business-to-business and/or business-to-consumer communication. Life Cycle Assessment study has been performed in accordance with the requirements of EN 15804, EPD Hub PCR version 1.2 (24 Mar 2025) and JRC characterization factors EF 3.1. The manufacturer has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804 and if they are not compared in a building context.

PRODUCT CLASSIFICATION

Declared operating voltage, Volt	220-240
Light source colour temperature, Kelvin	3000
Protection index for water and dust (IP)	66
Impact resistance index (IK)	8
Luminous flux, Lumens	5780
Electrical power, Watt	52
Luminous efficiency, Lm/W	111
Additional characteristic	Not applicable

ABOUT THE MANUFACTURER

Signify is the world leader in lighting for professionals, consumers and lighting for the Internet of Things. Our energy efficient lighting products, systems and services enable our customers to enjoy a superior quality of light, and make people's lives safer and more comfortable, businesses more productive and cities more liveable.

For more information, please visit: <https://www.signify.com/global>

PRODUCT RAW MATERIAL MAIN COMPOSITION

Raw material category	Amount, mass- %	Material origin
Metals	44.38	APAC , EU
Minerals	2.34	APAC , EU
Fossil materials	27	APAC , EU
Bio-based materials	26.27	EU

BIOGENIC CARBON CONTENT

Product's biogenic carbon content at the factory gate

Biogenic carbon content in product, kg C	2.621
Biogenic carbon content in packaging, kg C	0.983

ENVIRONMENTAL DATA SUMMARY

Declared unit	1 unit
Declared unit mass, kg	10.719
Mass of packaging, kg	2.48
Functional unit (from PEP PSR0014)	Provide lighting that delivers an outgoing artificial luminous flux of 1000 lumens during a reference lifetime of 35000 hours
Reference service life (years)	25
Assigned lifetime (hours)	100000
GWP-total, A1-A3 (kg CO ₂ e)	91.3
GWP-fossil, A1-A3 (kg CO ₂ e)	106
Secondary material, inputs (%)	19.7
Secondary material, outputs (%)	30.7
Total energy use, A1-A3 (kWh)	354
Net freshwater use, A1-A3 (m ³)	9.27E-01

LIFE CYCLE ASSESSMENT

SYSTEM BOUNDARY

This EPD covers the life-cycle modules listed in the following table.

Product stage			Installation stage		Use stage							End of life stage				Beyond the system
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	X	X	ND	ND	ND	ND	ND	X	ND	X	X	X	X	X
Raw materials	Transport	Manufacturing	Transport	Installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstr./demo.	Transport	Waste processing	Disposal	Reuse, Recovery, Recycling

Modules not declared = ND.

CUT - OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the reference standard and the applied PCR. The study does not exclude any hazardous materials or substances. There is no neglected unit process more than 1% of total mass or energy flows. The module-specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

The production of capital equipment, construction activities, and infrastructure, maintenance and operation of capital equipment, personnel-related activities, energy and water use related to company management and sales activities are excluded.

VALIDATION OF DATA

Data collection for production, transport, and packaging was conducted using time and site-specific information, as defined in the general information section on page 1 and 2. Upstream process calculations rely on generic data as defined in the Bibliography section. Manufacturer-provided specific and generic data were used for the product's manufacturing stage. The analysis was performed in One Click LCA EPD Generator, with the 'Cut-Off, EN 15804+A2' allocation method, and characterization factors according to EN 15804:2012+A2:2019/AC:2021 and JRC EF 3.1.

ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation. All allocations are done as per the reference standards and the applied PCR. In this study, ancillary materials, energy & water consumption, material loss and waste generation at the manufacturing site are attributed to the bill of materials of the products, therefore, they are allocated by partitioning the quantities on the base of the total production in kg throughout the year. Thus, allocation has been done in the following ways:

Data type	Allocation
Raw materials	No allocation
Packaging materials	No allocation
Ancillary materials	Allocated by mass
Manufacturing energy and waste	Allocated by mass

Proxy data is used for certain materials due to their unavailability in the database. Conservative choices have been adopted when exact information was missing. Regarding module C1-C4: EOL scenarios are based on default values from EN 50693. For stages description please refer to section Product life cycle in this EPD report.

LCA SOFTWARE AND BIBLIOGRAPHY

This EPD has been created using One Click LCA Luminaire EPD Generator v2.2.7. The LCA and EPD have been prepared according to the reference standards, EN 50693, and ISO 14040/14044. Ecoinvent v 3.10.1 and One Click LCA databases were used as sources of environmental data. Allocation used in Ecoinvent 3.10.1 environmental data sources follow the methodology 'allocation, cut-off, EN 15804+A2'.

No other sources were used in the modelling of this EPD.

PRODUCT & MANUFACTURING SITES GROUPING

Type of grouping	No grouping
Grouping method	Not applicable
Variation in GWP-fossil for A1-A3, %	-

SUBSTANCES, REACH - VERY HIGH CONCERN

The product does not contain any REACH SVHC substances in amounts greater than 0,1 % (1000 ppm).

PRODUCT LIFE CYCLE

MANUFACTURING AND PACKAGING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production. The material losses occurring during the manufacturing processes are treated as per the waste handling practices in the factory, while scenario assumptions are made in the absence of exact data. The study also considers the fuels used by machines as well as losses during electricity transmission.

The product is made of metals, plastics, and electronic components. All components are transported to the production facility, where the main manufacturing processes primarily are associated with assembly. A2 transport distances are calculated always taking the capital city of component country of origin as a starting point and exact manufacturing location as destination. The finished product can be packaged with polyethylene, cardboard, and/or paper as packaging material before shipment to customers. Manufacturing loss, ancillaries and wastes are calculated according to the data that each manufacturing site is sharing with Signify. The total annual amount of waste in kg is allocated to the total annual production in kg at the specific manufacturing site responsible to produce the studied product. Thus, it is possible to allocate it according to the weight of the product analysed in this study.

Co-product allocation is neglected as revenue of co-product is very low, hence, the waste undergoes a conservative waste treatment.

The use of renewable energy in manufacturing is demonstrated through contractual instruments (GOs, RECs, etc), and its use is ensured throughout the validity period of this EPD.

TRANSPORT AND INSTALLATION (A4-A5)

A4 transport distances are calculated always taking the exact manufacturing location to customer location. If the customer's location is defined as a country or its capital city, the calculation is made to the respective capital city. If the

customer's location is specified as a region, the distance is calculated to the capital city of the best-performing sales country within that region. The transportation method is a combination of lorry and container ship where needed. To be conservative, empty returns are included in this study as implemented through an average load factor in the Ecoinvent transport datapoints. Environmental impacts from installation include waste packaging materials (A5). The packaging waste treatment is assumed to be conservative with incineration without energy recovery. The impacts of energy consumption and the used ancillary materials during installation are considered negligible.

PRODUCT USE AND MAINTENANCE (B1-B7)


During the use phase, the product consumes electricity (B6), which is calculated multiplying the Wattage x Assigned lifetime (hours) x Country energy mix factor. To know which Country energy mix was used in this EPD, please refer to Annex 2.

The Reference service life in years is calculated according to the main application type of the product, based on annual operating hours. Impacts due to electricity production include direct emissions to air, transformation, and transmission losses.

PRODUCT END OF LIFE (C1-C4, D)

Consumption of energy and natural resources in demolition process is assumed to be negligible. It is assumed that the waste is collected separately and transported to the waste treatment centre. The transport distance is 150 km while the transportation method is assumed to be lorry (C2). According to EN 50693:2019, the sequence of treatment operations occurring to the product shall include de-pollution, fractions separation and preparation (dismantling, crushing, shredding, sorting), recycling, other material recovery, energy recovery and disposal. In this study, the default values from table G.4 of EN 50693 is used for treating materials in different waste treatment methods. Due to the material and energy recovery potential of parts in the lighting system, the end-of-life product is converted into recycled raw materials, while the energy recovered from incineration displaces electricity and heat production (D). The benefits and loads of incineration and recycling are included in Module D.

LIFE CYCLE FLOW DIAGRAM - SYSTEM BOUNDARY

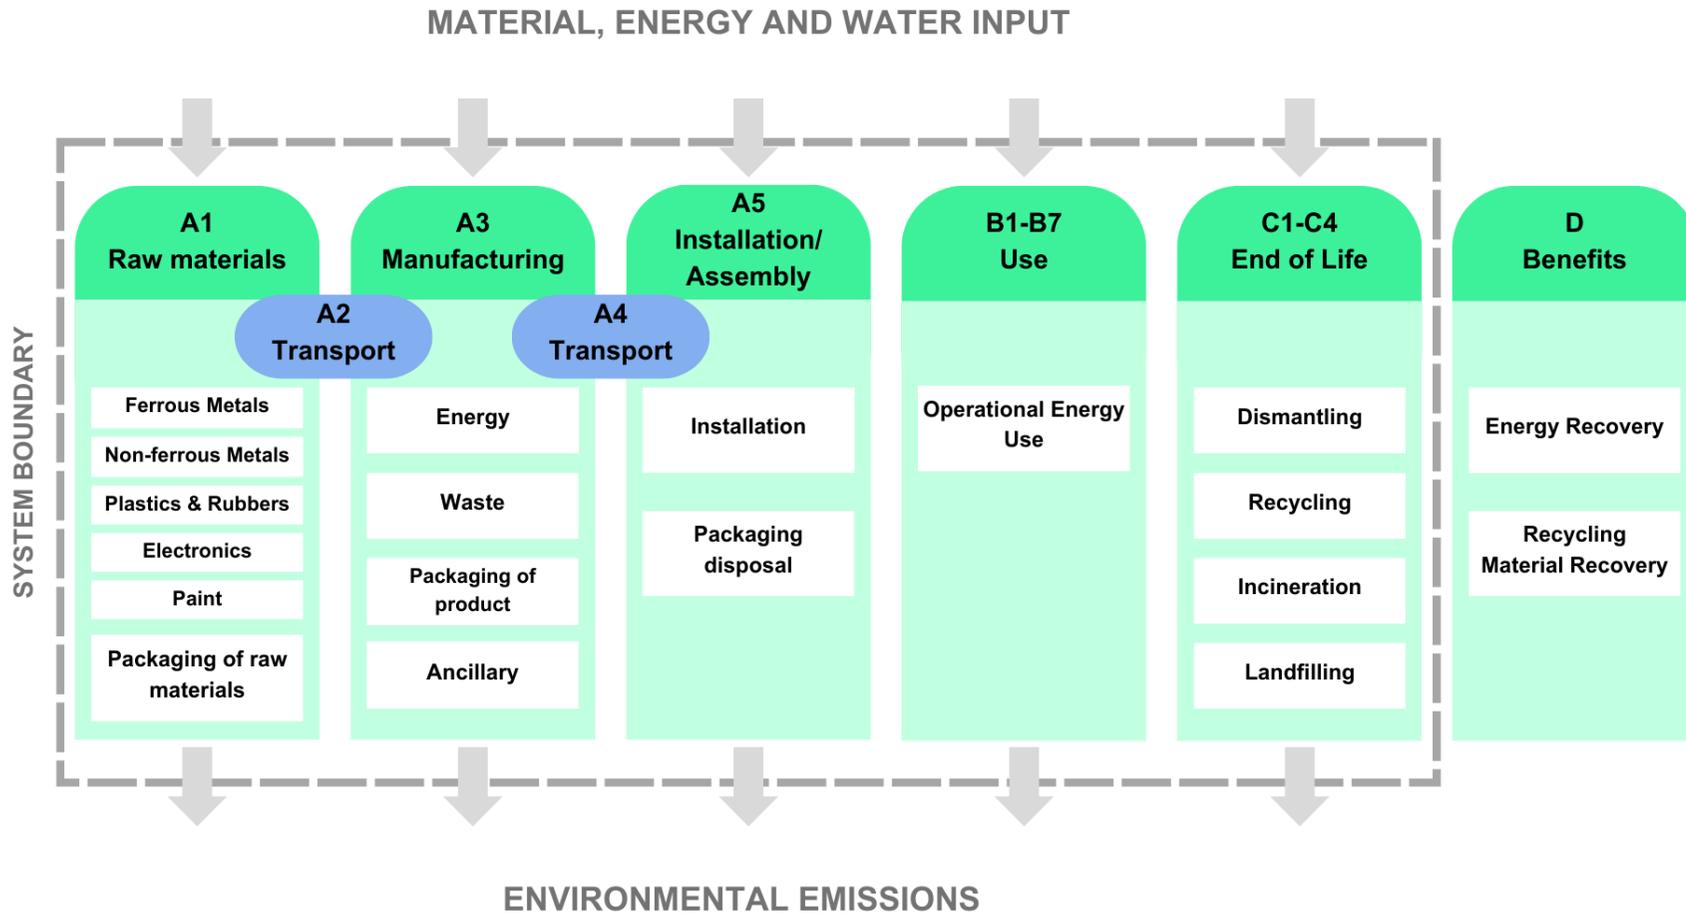

ENVIRONMENTAL IMPACT DATA, RESULTS PER DECLARED UNIT

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding threshold values, safety margins or risks.

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total ¹⁾	kg CO ₂ e	8.92E+01	3.26E-01	1.82E+00	9.13E+01	1.07E-01	3.75E+00	ND	ND	ND	ND	ND	7.96E+02	ND	0.00E+00	3.16E-01	6.62E+00	3.62E+00	-2.81E+01
GWP – fossil	kg CO ₂ e	1.01E+02	3.26E-01	4.76E+00	1.06E+02	1.07E-01	1.55E-01	ND	ND	ND	ND	ND	7.89E+02	ND	0.00E+00	3.15E-01	6.62E+00	3.62E+00	-2.81E+01
GWP – biogenic	kg CO ₂ e	-1.34E+01	5.97E-05	-3.02E+00	-1.65E+01	2.41E-05	3.59E+00	ND	ND	ND	ND	ND	3.38E+00	ND	0.00E+00	6.89E-05	-3.67E-04	-3.62E-04	-1.83E-02
GWP – LULUC	kg CO ₂ e	2.03E+00	1.64E-04	8.17E-02	2.11E+00	4.77E-05	5.73E-05	ND	ND	ND	ND	ND	3.38E+00	ND	0.00E+00	1.40E-04	2.40E-04	9.35E-05	-2.20E-02
Ozone depletion pot.	kg CFC-11e	3.19E-06	4.73E-09	1.78E-07	3.38E-06	1.57E-09	2.14E-09	ND	ND	ND	ND	ND	1.69E-05	ND	0.00E+00	4.41E-09	3.64E-09	2.36E-09	-1.28E-07
Acidification potential	mol H ⁺ e	9.15E-01	6.30E-03	2.17E-02	9.43E-01	3.63E-04	9.24E-04	ND	ND	ND	ND	ND	4.74E+00	ND	0.00E+00	1.05E-03	2.66E-03	1.13E-03	-3.20E-01
EP-freshwater ²⁾	kg Pe	4.26E-02	1.61E-05	1.77E-03	4.44E-02	8.30E-06	1.56E-05	ND	ND	ND	ND	ND	5.79E-01	ND	0.00E+00	2.45E-05	8.82E-05	1.88E-05	-1.83E-02
EP-marine	kg Ne	2.13E-01	1.60E-03	9.35E-03	2.24E-01	1.19E-04	4.31E-04	ND	ND	ND	ND	ND	8.53E-01	ND	0.00E+00	3.41E-04	1.10E-03	4.27E-03	-3.53E-02
EP-terrestrial	mol Ne	1.72E+00	1.78E-02	6.10E-02	1.80E+00	1.30E-03	3.93E-03	ND	ND	ND	ND	ND	1.03E+01	ND	0.00E+00	3.71E-03	1.00E-02	5.22E-03	-3.76E-01
POCP (“smog”) ³⁾	kg NMVOCe	4.42E-01	5.03E-03	1.96E-02	4.67E-01	5.36E-04	1.12E-03	ND	ND	ND	ND	ND	2.56E+00	ND	0.00E+00	1.46E-03	2.63E-03	1.46E-03	-1.13E-01
ADP-minerals & metals ⁴⁾	kg Sbe	4.17E-03	5.46E-07	2.71E-05	4.20E-03	2.97E-07	4.62E-07	ND	ND	ND	ND	ND	2.48E-02	ND	0.00E+00	1.04E-06	6.04E-06	3.77E-07	-1.57E-03
ADP-fossil resources	MJ	1.12E+03	4.27E+00	6.64E+01	1.19E+03	1.55E+00	1.61E+00	ND	ND	ND	ND	ND	1.27E+04	ND	0.00E+00	4.42E+00	2.87E+00	1.66E+00	-3.05E+02
Water use ⁵⁾	m ³ e depr.	4.01E+01	1.58E-02	2.04E+00	4.21E+01	7.64E-03	1.86E-01	ND	ND	ND	ND	ND	1.43E+03	ND	0.00E+00	2.05E-02	4.55E-01	2.27E-01	-3.97E+00

1) GWP = Global Warming Potential. 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO4e. 3) POCP = Photochemical ozone formation. 4) ADP = Abiotic depletion potential. 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Particulate matter	Incidence	8.38E-06	1.85E-08	3.69E-07	8.77E-06	1.07E-08	1.15E-08	ND	ND	ND	ND	ND	3.11E-05	ND	0.00E+00	2.50E-08	2.30E-08	1.17E-08	-1.70E-06
Ionizing radiation ⁶⁾	kBq U235e	4.24E+00	2.69E-03	2.14E-01	4.46E+00	1.35E-03	1.95E-03	ND	ND	ND	ND	ND	2.82E+02	ND	0.00E+00	3.58E-03	1.18E-02	2.48E-03	-2.19E+00
Ecotoxicity (freshwater)	CTUe	1.23E+03	4.39E-01	2.24E+01	1.25E+03	2.19E-01	4.45E+00	ND	ND	ND	ND	ND	4.44E+03	ND	0.00E+00	7.00E-01	1.35E+01	1.14E+02	-1.37E+02
Human toxicity, cancer	CTUh	7.18E-08	6.32E-11	2.29E-09	7.41E-08	1.76E-11	2.14E-10	ND	ND	ND	ND	ND	4.95E-07	ND	0.00E+00	5.36E-11	6.39E-10	5.62E-10	-1.94E-08
Human tox. non-cancer	CTUh	2.08E-06	1.78E-09	6.29E-08	2.14E-06	1.00E-09	8.75E-09	ND	ND	ND	ND	ND	2.63E-05	ND	0.00E+00	2.77E-09	2.53E-08	1.82E-08	-1.48E-06
SQP ⁷⁾	-	1.08E+03	2.03E+00	2.51E+02	1.33E+03	1.56E+00	7.87E-01	ND	ND	ND	ND	ND	2.21E+04	ND	0.00E+00	2.64E+00	2.49E+00	2.02E+00	-9.13E+01

USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER as energy ⁸⁾	MJ	1.00E+02	4.37E-02	1.65E+01	1.17E+02	2.12E-02	-4.40E+01	ND	ND	ND	ND	ND	1.96E+04	ND	0.00E+00	6.07E-02	2.94E-01	4.72E-02	-2.26E+01
Renew. PER as material	MJ	5.47E+00	0.00E+00	2.63E+01	3.18E+01	0.00E+00	-3.18E+01	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	-2.19E-02	-3.70E-02	0.00E+00
Total use of renew. PER	MJ	1.05E+02	4.37E-02	4.29E+01	1.48E+02	2.12E-02	-7.58E+01	ND	ND	ND	ND	ND	1.96E+04	ND	0.00E+00	6.07E-02	2.72E-01	1.02E-02	-2.26E+01
Non-re. PER as energy	MJ	1.09E+03	4.27E+00	6.60E+01	1.16E+03	1.55E+00	1.61E+00	ND	ND	ND	ND	ND	1.27E+04	ND	0.00E+00	4.42E+00	-9.63E+01	-1.13E+02	-3.05E+02
Non-re. PER as material	MJ	5.76E+01	0.00E+00	-5.32E-01	5.70E+01	0.00E+00	-2.87E-01	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	-2.83E+01	-2.84E+01	0.00E+00
Total use of non-re. PER	MJ	1.14E+03	4.27E+00	6.55E+01	1.21E+03	1.55E+00	1.32E+00	ND	ND	ND	ND	ND	1.27E+04	ND	0.00E+00	4.42E+00	-1.25E+02	-1.42E+02	-3.05E+02
Secondary materials	kg	2.11E+00	0.00E+00	0.00E+00	2.11E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Renew. secondary fuels	MJ	8.11E-02	1.24E-05	2.60E-01	3.42E-01	8.36E-06	2.00E-05	ND	ND	ND	ND	ND	4.89E-02	ND	0.00E+00	2.53E-05	1.18E-04	3.00E-05	-2.09E-03
Non-ren. secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use of net fresh water	m ³	8.80E-01	4.36E-04	4.60E-02	9.27E-01	2.29E-04	3.01E-03	ND	ND	ND	ND	ND	4.65E+01	ND	0.00E+00	5.86E-04	8.08E-03	-4.85E-03	-1.54E-01

8) PER = Primary energy resources.

END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg	1.64E+01	6.33E-03	2.70E-01	1.67E+01	2.62E-03	4.89E-02	ND	ND	ND	ND	ND	7.74E+01	ND	0.00E+00	7.71E-03	1.24E-01	1.49E-01	-4.77E+00
Non-hazardous waste	kg	2.84E+02	1.01E-01	1.67E+01	3.01E+02	4.85E-02	2.65E+00	ND	ND	ND	ND	ND	2.83E+03	ND	0.00E+00	1.45E-01	3.35E+00	1.50E+01	-7.98E+01
Radioactive waste	kg	1.06E-03	6.57E-07	5.09E-05	1.11E-03	3.30E-07	4.88E-07	ND	ND	ND	ND	ND	6.42E-02	ND	0.00E+00	8.77E-07	2.90E-06	6.17E-07	-5.34E-04

END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for reuse	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	kg	0.00E+00	0.00E+00	9.12E-02	9.12E-02	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	3.29E+00	0.00E+00	0.00E+00
Materials for energy rec	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Exported energy	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	3.11E+01	0.00E+00	0.00E+00
Exported energy – Electricity	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	1.31E+01	0.00E+00	0.00E+00
Exported energy – Heat	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	1.80E+01	0.00E+00	0.00E+00

ENVIRONMENTAL IMPACTS – EN 15804+A1, CML

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Pot.	kg CO ₂ e	1.00E+02	3.24E-01	5.10E+00	1.06E+02	1.06E-01	1.54E-01	ND	ND	ND	ND	ND	7.91E+02	ND	0.00E+00	3.14E-01	6.62E+00	3.61E+00	-2.79E+01
Ozone depletion Pot.	kg CFC-11e	3.46E-06	3.76E-09	1.68E-07	3.63E-06	1.26E-09	1.82E-09	ND	ND	ND	ND	ND	1.55E-05	ND	0.00E+00	3.52E-09	3.17E-09	2.00E-09	-1.13E-07
Acidification	kg SO ₂ e	6.35E-01	5.02E-03	1.54E-02	6.56E-01	2.77E-04	6.79E-04	ND	ND	ND	ND	ND	3.80E+00	ND	0.00E+00	8.05E-04	2.01E-03	8.12E-04	-2.76E-01
Eutrophication	kg PO ₄ ³ e	2.48E-01	5.95E-04	9.48E-03	2.58E-01	6.76E-05	2.11E-04	ND	ND	ND	ND	ND	6.86E-01	ND	0.00E+00	1.96E-04	5.10E-04	4.60E-04	-1.78E-02
POCP (“smog”)	kg C ₂ H ₄ e	4.72E-02	2.62E-04	1.74E-03	4.92E-02	2.47E-05	5.17E-05	ND	ND	ND	ND	ND	2.46E-01	ND	0.00E+00	7.21E-05	1.25E-04	8.19E-05	-1.48E-02
ADP-elements	kg Sbe	4.15E-03	5.35E-07	2.68E-05	4.18E-03	2.90E-07	3.86E-07	ND	ND	ND	ND	ND	2.48E-02	ND	0.00E+00	1.01E-06	5.88E-06	2.99E-07	-1.56E-03
ADP-fossil	MJ	1.05E+03	4.23E+00	6.29E+01	1.12E+03	1.53E+00	1.58E+00	ND	ND	ND	ND	ND	8.63E+03	ND	0.00E+00	4.37E+00	2.68E+00	1.62E+00	-2.70E+02

ADDITIONAL INDICATOR – GWP-GHG

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-GHG 9)	kg CO ₂ e	1.03E+02	3.26E-01	4.84E+00	1.08E+02	1.07E-01	1.55E-01	ND	ND	ND	ND	ND	7.93E+02	ND	0.00E+00	3.16E-01	6.62E+00	3.62E+00	-2.81E+01

9) This indicator includes all greenhouse gases excluding biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. In addition, the characterisation factors for the flows - CH₄ fossil, CH₄ biogenic and Dinitrogen monoxide - were updated. This indicator is identical to the GWP-total of EN 15804:2012+A2:2019 except that the characterization factor for biogenic CO₂ is set to zero.

ENVIRONMENTAL IMPACT DATA, RESULTS PER FUNCTIONAL UNIT

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding threshold values, safety margins or risks.

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total ¹⁾	kg CO ₂ éq/FU	5.40E+00	1.97E-02	1.10E-01	5.53E+00	6.46E-03	2.27E-01	ND	ND	ND	ND	ND	4.82E+01	ND	0.00E+00	1.91E-02	4.01E-01	2.19E-01	-1.70E+00
GWP – fossil	kg CO ₂ éq/FU	6.09E+00	1.97E-02	2.88E-01	6.40E+00	6.45E-03	9.41E-03	ND	ND	ND	ND	ND	4.78E+01	ND	0.00E+00	1.91E-02	4.01E-01	2.19E-01	-1.70E+00
GWP – biogenic	kg CO ₂ éq/FU	-8.14E-01	3.61E-06	-1.83E-01	-9.97E-01	1.46E-06	2.17E-01	ND	ND	ND	ND	ND	2.05E-01	ND	0.00E+00	4.17E-06	-2.22E-05	-2.19E-05	-1.11E-03
GWP – LULUC	kg CO ₂ éq/FU	1.23E-01	9.96E-06	4.95E-03	1.28E-01	2.89E-06	3.47E-06	ND	ND	ND	ND	ND	2.05E-01	ND	0.00E+00	8.46E-06	1.45E-05	5.66E-06	-1.33E-03
Ozone depletion pot.	kg CFC ₁₁ e/FU	1.93E-07	2.86E-10	1.08E-08	2.04E-07	9.53E-11	1.29E-10	ND	ND	ND	ND	ND	1.02E-06	ND	0.00E+00	2.67E-10	2.20E-10	1.43E-10	-7.72E-09
Acidification potential	mole H ⁺ e/FU	5.54E-02	3.82E-04	1.32E-03	5.71E-02	2.20E-05	5.59E-05	ND	ND	ND	ND	ND	2.87E-01	ND	0.00E+00	6.37E-05	1.61E-04	6.85E-05	-1.94E-02
EP-freshwater ²⁾	kg Pe/FU	2.58E-03	9.74E-07	1.07E-04	2.69E-03	5.02E-07	9.45E-07	ND	ND	ND	ND	ND	3.51E-02	ND	0.00E+00	1.49E-06	5.34E-06	1.14E-06	-1.11E-03
EP-marine	kg Ne/FU	1.29E-02	9.70E-05	5.66E-04	1.36E-02	7.23E-06	2.61E-05	ND	ND	ND	ND	ND	5.16E-02	ND	0.00E+00	2.06E-05	6.63E-05	2.58E-04	-2.14E-03
EP-terrestrial	mol Ne/FU	1.04E-01	1.08E-03	3.69E-03	1.09E-01	7.87E-05	2.38E-04	ND	ND	ND	ND	ND	6.21E-01	ND	0.00E+00	2.24E-04	6.06E-04	3.16E-04	-2.28E-02
POCP (“smog”) ³⁾	kg NMVOCe/	2.68E-02	3.05E-04	1.19E-03	2.83E-02	3.24E-05	6.78E-05	ND	ND	ND	ND	ND	1.55E-01	ND	0.00E+00	8.87E-05	1.59E-04	8.82E-05	-6.82E-03
ADP-minerals & metals ⁴⁾	kg Sbe/FU	2.53E-04	3.31E-08	1.64E-06	2.54E-04	1.80E-08	2.80E-08	ND	ND	ND	ND	ND	1.50E-03	ND	0.00E+00	6.27E-08	3.66E-07	2.28E-08	-9.48E-05
ADP-fossil resources	MJ/FU	6.80E+01	2.59E-01	4.02E+00	7.23E+01	9.36E-02	9.73E-02	ND	ND	ND	ND	ND	7.68E+02	ND	0.00E+00	2.68E-01	1.74E-01	1.01E-01	-1.85E+01
Water use ⁵⁾	m ³ e priv./FU	2.43E+00	9.60E-04	1.23E-01	2.55E+00	4.62E-04	1.13E-02	ND	ND	ND	ND	ND	8.63E+01	ND	0.00E+00	1.24E-03	2.75E-02	1.37E-02	-2.40E-01

1) GWP = Global Warming Potential. 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO4e. 3) POCP = Photochemical ozone formation. 4) ADP = Abiotic depletion potential. 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Particulate matter	Incidence /FU	5.07E-07	1.12E-09	2.23E-08	5.31E-07	6.46E-10	6.97E-10	ND	ND	ND	ND	ND	1.89E-06	ND	0.00E+00	1.52E-09	1.39E-09	7.10E-10	-1.03E-07
Ionizing radiation ⁶⁾	kBq U235e/FU	2.57E-01	1.63E-04	1.29E-02	2.70E-01	8.15E-05	1.18E-04	ND	ND	ND	ND	ND	1.71E+01	ND	0.00E+00	2.17E-04	7.12E-04	1.50E-04	-1.33E-01
Ecotoxicity (freshwater)	CTUe/FU	7.43E+01	2.66E-02	1.35E+00	7.57E+01	1.32E-02	2.69E-01	ND	ND	ND	ND	ND	2.69E+02	ND	0.00E+00	4.24E-02	8.18E-01	6.92E+00	-8.32E+00
Human toxicity, cancer	CTUh/FU	4.35E-09	3.82E-12	1.39E-10	4.49E-09	1.06E-12	1.30E-11	ND	ND	ND	ND	ND	3.00E-08	ND	0.00E+00	3.25E-12	3.87E-11	3.41E-11	-1.17E-09
Human tox. non-cancer	CTUh/FU	1.26E-07	1.08E-10	3.81E-09	1.30E-07	6.06E-11	5.30E-10	ND	ND	ND	ND	ND	1.59E-06	ND	0.00E+00	1.68E-10	1.53E-09	1.10E-09	-8.95E-08
SQP ⁷⁾	-/FU	6.54E+01	1.23E-01	1.52E+01	8.07E+01	9.43E-02	4.76E-02	ND	ND	ND	ND	ND	1.34E+03	ND	0.00E+00	1.60E-01	1.51E-01	1.22E-01	-5.53E+00

USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER as energy ⁸⁾	MJ/FU	6.05E+00	2.65E-03	1.00E+00	7.06E+00	1.28E-03	-2.67E+00	ND	ND	ND	ND	ND	1.19E+03	ND	0.00E+00	3.67E-03	1.78E-02	2.86E-03	-1.37E+00
Renew. PER as material	MJ/FU	3.31E-01	0.00E+00	1.60E+00	1.93E+00	0.00E+00	-1.92E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	-1.32E-03	-2.24E-03	0.00E+00
Total use of renew. PER	MJ/FU	6.38E+00	2.65E-03	2.59E+00	8.98E+00	1.28E-03	-4.59E+00	ND	ND	ND	ND	ND	1.19E+03	ND	0.00E+00	3.67E-03	1.65E-02	6.18E-04	-1.37E+00
Non-re. PER as energy	MJ/FU	6.58E+01	2.59E-01	4.00E+00	7.01E+01	9.36E-02	9.73E-02	ND	ND	ND	ND	ND	7.68E+02	ND	0.00E+00	2.68E-01	-5.83E+00	-6.86E+00	-1.85E+01
Non-re. PER as material	MJ/FU	3.49E+00	0.00E+00	-3.22E-02	3.45E+00	0.00E+00	-1.74E-02	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	-1.71E+00	-1.72E+00	0.00E+00
Total use of non-re. PER	MJ/FU	6.93E+01	2.59E-01	3.97E+00	7.35E+01	9.36E-02	7.99E-02	ND	ND	ND	ND	ND	7.68E+02	ND	0.00E+00	2.68E-01	-7.54E+00	-8.58E+00	-1.85E+01
Secondary materials	kg/FU	1.28E-01	0.00E+00	0.00E+00	1.28E-01	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Renew. secondary fuels	MJ/FU	4.91E-03	7.52E-07	1.58E-02	2.07E-02	5.06E-07	1.21E-06	ND	ND	ND	ND	ND	2.96E-03	ND	0.00E+00	1.53E-06	7.12E-06	1.82E-06	-1.26E-04
Non-ren. secondary fuels	MJ/FU	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use of net fresh water	m ³ /FU	5.33E-02	2.64E-05	2.79E-03	5.61E-02	1.38E-05	1.83E-04	ND	ND	ND	ND	ND	2.81E+00	ND	0.00E+00	3.55E-05	4.89E-04	-2.94E-04	-9.31E-03

8) PER = Primary energy resources.

END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg/FU	9.92E-01	3.83E-04	1.64E-02	1.01E+00	1.59E-04	2.96E-03	ND	ND	ND	ND	ND	4.69E+00	ND	0.00E+00	4.67E-04	7.50E-03	9.03E-03	-2.89E-01
Non-hazardous waste	kg/FU	1.72E+01	6.12E-03	1.01E+00	1.82E+01	2.94E-03	1.60E-01	ND	ND	ND	ND	ND	1.71E+02	ND	0.00E+00	8.76E-03	2.03E-01	9.07E-01	-4.83E+00
Radioactive waste	kg/FU	6.39E-05	3.98E-08	3.08E-06	6.71E-05	2.00E-08	2.95E-08	ND	ND	ND	ND	ND	3.89E-03	ND	0.00E+00	5.31E-08	1.76E-07	3.74E-08	-3.23E-05

END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for reuse	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	kg	0.00E+00	0.00E+00	5.52E-03	5.52E-03	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	2.00E-01	0.00E+00	0.00E+00
Materials for energy rec	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Exported energy	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	1.88E+00	0.00E+00	0.00E+00
Exported energy – Electricity	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	7.93E-01	0.00E+00	0.00E+00
Exported energy – Heat	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	1.09E+00	0.00E+00	0.00E+00

ENVIRONMENTAL IMPACTS – EN 15804+A1, CML

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Pot.	kg CO ₂ eq./FU	6.07E+00	1.96E-02	3.09E-01	6.39E+00	6.42E-03	9.33E-03	ND	ND	ND	ND	ND	4.79E+01	ND	0.00E+00	1.90E-02	4.01E-01	2.19E-01	-1.69E+00
Ozone depletion Pot.	kg CFC ₁₁ e/FU	2.09E-07	2.28E-10	1.02E-08	2.20E-07	7.60E-11	1.10E-10	ND	ND	ND	ND	ND	9.37E-07	ND	0.00E+00	2.13E-10	1.92E-10	1.21E-10	-6.85E-09
Acidification	kg SO ₂ e/FU	3.85E-02	3.04E-04	9.33E-04	3.97E-02	1.68E-05	4.11E-05	ND	ND	ND	ND	ND	2.30E-01	ND	0.00E+00	4.88E-05	1.21E-04	4.92E-05	-1.67E-02
Eutrophication	kg PO ₄ ³ e/FU	1.50E-02	3.60E-05	5.74E-04	1.56E-02	4.09E-06	1.28E-05	ND	ND	ND	ND	ND	4.16E-02	ND	0.00E+00	1.19E-05	3.09E-05	2.78E-05	-1.08E-03
POCP (“smog”)	kg C ₂ H ₄ e/FU	2.86E-03	1.58E-05	1.05E-04	2.98E-03	1.50E-06	3.13E-06	ND	ND	ND	ND	ND	1.49E-02	ND	0.00E+00	4.37E-06	7.58E-06	4.96E-06	-8.99E-04
ADP-elements	kg Sbe/FU	2.52E-04	3.24E-08	1.62E-06	2.53E-04	1.76E-08	2.34E-08	ND	ND	ND	ND	ND	1.50E-03	ND	0.00E+00	6.12E-08	3.56E-07	1.81E-08	-9.46E-05
ADP-fossil	MJ/FU	6.38E+01	2.56E-01	3.81E+00	6.78E+01	9.23E-02	9.54E-02	ND	ND	ND	ND	ND	5.23E+02	ND	0.00E+00	2.65E-01	1.62E-01	9.84E-02	-1.64E+01

ADDITIONAL INDICATOR – GWP-GHG

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-GHG ⁹⁾	kg CO ₂ e/FU	6.21E+00	1.97E-02	2.93E-01	6.53E+00	6.45E-03	9.41E-03	ND	ND	ND	ND	ND	4.80E+01	ND	0.00E+00	1.91E-02	4.01E-01	2.19E-01	-1.70E+00

9) This indicator includes all greenhouse gases excluding biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. In addition, the characterisation factors for the flows - CH₄ fossil, CH₄ biogenic and Dinitrogen monoxide - were updated. This indicator is identical to the GWP-total of EN 15804:2012+A2:2019 except that the characterization factor for biogenic CO₂ is set to zero.

SCENARIO DOCUMENTATION

DATA SOURCES

Manufacturing energy scenario documentation – A3 (Energy data source)

1. Energy supply, electricity production, co-generation oil and gas, Heat and power co-generation, natural gas, combined cycle power plant, 400MW electrical, Denmark,ecoinvent 3.10.1, 0.0267 kgCO₂e/MJ
2. Energy supply, electricity production, solar photovoltaic, Electricity production, photovoltaic, 570kWp open ground installation, multi-Si, World, ecoinvent 3.10.1, 0.0829 kgCO₂e/kWh

Transport scenario documentation - A4

1. Transport, freight, lorry >32 metric ton, EURO5, 75.0 km
2. Transport, freight, sea, container ship, 0.0 km

Installation scenario documentation - A5 (Waste materials data source)

1. Market for corrugated board box, 2.36 kg
2. Market for printed paper, offset, 0.12 kg

Use stages scenario documentation - B6-B7 (Energy data source)

1. Energy supply, electricity transformation and distribution, distribution low voltage, Market for electricity, low voltage, Denmark, 5096.0 kWh

TRANSPORT SCENARIO DOCUMENTATION - A4

Scenario parameter	Value
Capacity utilization (including empty return) %	50 %
Bulk density of transported products / kg/m ³	7.23E+01
Volume capacity utilization factor (factor: =1 or <1 or ≥1 for compressed or nested packaged products)	1

INSTALLATION SCENARIO DOCUMENTATION - A5

Scenario parameter	Value
Ancillary materials for installation (specified by material) / kg or other units as appropriate	0
Water use / m ³	0
Other resource use / kg	0
Direct emissions to ambient air, soil and water / kg	0

USE STAGES SCENARIO DOCUMENTATION - B6-B7 USE OF ENERGY AND WATER

Scenario information	Value
Ancillary materials specified by material / kg or units as appropriate	Not applicable
Net fresh water consumption / m ³	0
Power output of equipment / kW	52
Characteristic performance, e.g., energy efficiency, emissions, variation of performance with capacity utilization, etc. / Units as appropriate	For more details see product classification table and product description.
Further assumptions for scenario development, e.g., frequency and period of use, number of occupants / Units as appropriate	For more details see product classification table and product description.

END OF LIFE SCENARIO DOCUMENTATION

Scenario information	Value
Collection process – kg collected separately	10.719
Collection process – kg collected with mixed waste	0
Recovery process – kg for re-use	0
Recovery process – kg for recycling	3.29E+00
Recovery process – kg for energy recovery	0
Disposal (total) – kg for final deposition	4.54E+00
Scenario assumptions e.g. transportation	Lorry, 16-32 metric ton, EURO5; 150 km

THIRD-PARTY VERIFICATION STATEMENT

EPD Hub declares that this EPD is verified in accordance with ISO 14025 by an independent, third-party verifier. The project report on the Life Cycle Assessment and the report(s) on features of environmental relevance are filed at EPD Hub. EPD Hub PCR and ECO Platform verification checklist are used.

EPD Hub is not able to identify any unjustified deviations from the PCR and EN 15804+A2 in the Environmental Product Declaration and its project report.

EPD Hub maintains its independence as a third-party body; it was not involved in the execution of the LCA or in the development of the declaration and has no conflicts of interest regarding this verification.

The company-specific data and upstream and downstream data have been examined as regards plausibility and consistency. The publisher is responsible for ensuring the factual integrity and legal compliance of this declaration.



Program assistant: Xinyuan Zhang



The software used in creation of this LCA and EPD is verified by EPD Hub to conform to the procedural and methodological requirements outlined in ISO 14025:2010, ISO 14040/14044, EN 15804+A2, and EPD Hub Core Product Category Rules and General Program Instructions.

[Verified tools](#)

Tool verifier: Hai Ha Nguyen

Tool verification validity: 28 March 2025 - 27 March 2028

APPENDIX 1

MATERIAL COMPOSITION

The product material composition is illustrated in the table below. The material weight is given in grams and in percentage on total product weight.

Table 1: Material composition

Material	Weight (g)	Weight-%
Aluminium	3548.96	33.11
Bio Plastics	2816	26.27
Copper	193.95	1.81
Glass	12.98	0.12
Other Plastics	2649.33	24.72
Paint	73.1	0.68
PCB Alu	130.73	1.22
PCB Copper	141.17	1.32
PCB Iron	121.18	1.13
PCB Non-ferrous metal	0.98	0.01
PCB Support	171.71	1.6
PCB Tin	11.16	0.1
Silica Sand	238	2.22
Stainless Steel	30	0.28
Steel	579.12	5.4

APPENDIX 2

USE PHASE (B6) VALUES FOR DIFFERENT COUNTRY MIX

In this EPD the B6 impact has been calculated using the energy mix of **(EU)**. The table in this appendix is useful for conversion and comparison of B6 values with other country energy mix. The Global Warming Potential Total (GWP tot) value is illustrated for each country. The value refers to 1 kwh.

Example on how to use the table:

If for example this EPD was done according to EU energy mix and you want to see how the GWP total changes according to a Finland country energy mix, you can take the original value in the results table here highlighted in yellow:

ENVIRONMENTAL IMPACT DATA, RESULTS PER DECLARED UNIT

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding threshold values, safety margins or risks.

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total ¹⁾	kg CO ₂ e	1.08E+01	2.33E-01	5.06E-01	1.15E+01	3.27E+00	1.68E+00	ND	ND	ND	ND	ND	4.06E-02	ND	0.00E+00	2.88E-02	5.13E-01	2.80E-01	-9.88E-01

Divide that value according to the EU value from the following table (EU = 3.30E-01) and then multiplying for the Finland value from the same table (FINLAND = 1.54E-01).

Thus, the calculation of this example would be:

New B6 GWP tot for Finland = $(4.06E-02 / 3.30E-01) \times 1.54E-01 = 1.89E-02$.

Country	GWP tot (kg CO2 eq. per kwh)		
AFRICA	7.30E-01	GERMANY	3.90E-01
APAC	9.50E-01	INDIA	1.50E+00
AUSTRALIA	8.40E-01	ITALY	3.50E-01
AUSTRIA	2.30E-01	LATAM	3.90E-01
BELGIUM	2.00E-01	NAM	4.50E-01
CHINA	1.02E+00	NETHERLANDS	3.90E-01
DENMARK	1.60E-01	NORWAY	4.50E-02
EU	3.30E-01	ROW	7.30E-01
FINLAND	1.54E-01	SPAIN	2.10E-01
FRANCE	8.70E-02	SWEDEN	3.70E-02
		UK	2.60E-01

Source Ecoinvent 3.10.1

APPENDIX 3 - EPD HUB ALIGNED

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from a reference variant of a product family, based on various light management scenarios and power inputs of the luminaires within the same product family.

To calculate the Scaled Impact (*SI*), we have followed the below methods:

1. Calculate the power scaling factor (PSF), which is the ratio of the power input of the variant in questions P_{in} and the power input of the base variant P_{base} .

$$PSF = \frac{P_{in}}{P_{base}}$$

2. Calculate the Total Scaling factor by multiplying the PSF by the control scaling factor (CSF), where the CSF is determined according the relevant control factor scenario (e.g. if the luminaire has a presence detection system). The presented controls factors values in Table A1 are based on BS EN 15193-1:2017. Please refer to this publication or contact Signify directly for more information.

$$TSF = PSF * CSF$$

Table 1: Light management function (PEP EcoPassport aligned)

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

3. Lastly, the GWP of the base variant is then scaled by the TSF.

$$\text{Scaled Impact} = \text{GWP}_{\text{case}} * \text{TSF}$$

The following list of product configurations is not exhaustive. Please use the formula defined in point 1 above to calculate the exact power scaling factor (PSF) for any specific configuration.

Table 2: GWP per scaling factor (EPD Hub aligned)

	12NC or Product Family Code	Description	Flux [Lm]	Power [W]	Efficacy [L/W]	PSF	Total Scaling Factor (TSF)				Scaled Impacts (GWP100 B6 - kg CO2eq.)			
							NC	DD	PS	DD+PS	NC	DD	PS	DD+PS
1	BDS/BSS639	BDS/BSS639 LED100/722	8330	79.0	105.4	1.519	1.519	1.139	1.139	0.836	1207.8	905.8	905.8	664.3
2	BDS/BSS639	BDS/BSS639 LED110/722	8820	87.0	101.4	1.673	1.673	1.255	1.255	0.920	1330.1	997.5	997.5	731.5
3	BDS/BSS639	BDS/BSS639 LED120/722	9660	95.0	101.7	1.827	1.827	1.370	1.370	1.005	1452.4	1089.3	1089.3	798.8
4	BDS/BSS639	BDS/BSS639 LED130/722	10500	104.0	101.0	2.000	2.000	1.500	1.500	1.100	1590.0	1192.5	1192.5	874.5
5	BDS/BSS639	BDS/BSS639 LED140/722	10790	112.0	96.3	2.154	2.154	1.615	1.615	1.185	1712.3	1284.2	1284.2	941.7
6	BDS/BSS639	BDS/BSS639 LED40/722	3393	32.5	104.4	0.625	0.625	0.469	0.469	0.344	496.9	372.6	372.6	273.3
7	BDS/BSS639	BDS/BSS639 LED50/722	4214	40.0	105.4	0.769	0.769	0.577	0.577	0.423	611.5	458.6	458.6	336.3
8	BDS/BSS639	BDS/BSS639 LED60/722	4988	48.0	103.9	0.923	0.923	0.692	0.692	0.508	733.8	550.4	550.4	403.6

9	BDS/BSS639	BDS/BSS639 LED70/722	5780	56.0	103.2	1.077	1.077	0.808	0.808	0.592	856.1	642.1	642.1	470.9
10	BDS/BSS639	BDS/BSS639 LED80/722	6384	64.0	99.8	1.231	1.231	0.923	0.923	0.677	978.4	733.8	733.8	538.1
11	BDS/BSS639	BDS/BSS639 LED90/722	7224	72.0	100.3	1.385	1.385	1.038	1.038	0.762	1100.7	825.6	825.6	605.4
12	BDS/BSS639	BDS/BSS639 LED100/727	8330	67.0	124.3	1.288	1.288	0.966	0.966	0.709	1024.3	768.2	768.2	563.4
13	BDS/BSS639	BDS/BSS639 LED110/727	8820	75.0	117.6	1.442	1.442	1.082	1.082	0.793	1146.6	860.0	860.0	630.6
14	BDS/BSS639	BDS/BSS639 LED120/727	9660	81.0	119.3	1.558	1.558	1.168	1.168	0.857	1238.3	928.7	928.7	681.1
15	BDS/BSS639	BDS/BSS639 LED130/727	10500	88.0	119.3	1.692	1.692	1.269	1.269	0.931	1345.3	1009.0	1009.0	739.9
16	BDS/BSS639	BDS/BSS639 LED140/727	11340	95.0	119.4	1.827	1.827	1.370	1.370	1.005	1452.4	1089.3	1089.3	798.8
17	BDS/BSS639	BDS/BSS639 LED40/727	3393	28.0	121.2	0.538	0.538	0.404	0.404	0.296	428.1	321.0	321.0	235.4
18	BDS/BSS639	BDS/BSS639 LED50/727	4214	34.5	122.1	0.663	0.663	0.498	0.498	0.365	527.4	395.6	395.6	290.1
19	BDS/BSS639	BDS/BSS639 LED100/723	6851	54.4	126.0	1.045	1.045	0.784	0.784	0.575	831.0	623.3	623.3	457.1
20	BDS/BSS639	BDS/BSS639 LED110/723	6774	52.7	128.5	1.014	1.014	0.760	0.760	0.558	806.1	604.5	604.5	443.3
21	BDS/BSS639	BDS/BSS639 LED120/723	6698	51.1	131.1	0.983	0.983	0.737	0.737	0.540	781.1	585.8	585.8	429.6
22	BDS/BSS639	BDS/BSS639 LED130/723	6622	49.5	133.9	0.951	0.951	0.713	0.713	0.523	756.1	567.1	567.1	415.8
23	BDS/BSS639	BDS/BSS639 LED140/723	6546	47.8	136.9	0.920	0.920	0.690	0.690	0.506	731.1	548.3	548.3	402.1

24	BDS/BSS639	BDS/BSS639 LED40/723	6470	46.2	140.1	0.888	0.888	0.666	0.666	0.489	706.1	529.6	529.6	388.4
25	BDS/BSS639	BDS/BSS639 LED50/723	6394	44.6	143.5	0.857	0.857	0.643	0.643	0.471	681.1	510.8	510.8	374.6
26	BDS/BSS639	BDS/BSS639 LED60/723	6317	42.9	147.2	0.825	0.825	0.619	0.619	0.454	656.1	492.1	492.1	360.9
27	BDS/BSS639	BDS/BSS639 LED70/723	6241	41.3	151.2	0.794	0.794	0.595	0.595	0.437	631.1	473.3	473.3	347.1
28	BDS/BSS639	BDS/BSS639 LED80/723	6165	39.6	155.5	0.762	0.762	0.572	0.572	0.419	606.1	454.6	454.6	333.4
29	BDS/BSS639	BDS/BSS639 LED90/723	6089	38.0	160.2	0.731	0.731	0.548	0.548	0.402	581.1	435.9	435.9	319.6
30	BDS/BSS639	BDS/BSS639 LED100/728	6013	36.4	165.3	0.700	0.700	0.525	0.525	0.385	556.1	417.1	417.1	305.9
31	BDS/BSS639	BDS/BSS639 LED110/728	5936	34.7	170.9	0.668	0.668	0.501	0.501	0.367	531.2	398.4	398.4	292.1
32	BDS/BSS639	BDS/BSS639 LED120/728	5860	33.1	177.0	0.637	0.637	0.478	0.478	0.350	506.2	379.6	379.6	278.4
33	BDS/BSS639	BDS/BSS639 LED130/728	5784	31.5	183.8	0.605	0.605	0.454	0.454	0.333	481.2	360.9	360.9	264.6
34	BDS/BSS639	BDS/BSS639 LED140/728	5708	29.8	191.3	0.574	0.574	0.430	0.430	0.316	456.2	342.1	342.1	250.9
35	BDS/BSS639	BDS/BSS639 LED40/728	5632	28.2	199.7	0.542	0.542	0.407	0.407	0.298	431.2	323.4	323.4	237.2
36	BDS/BSS639	BDS/BSS639 LED50/728	5555	26.6	209.1	0.511	0.511	0.383	0.383	0.281	406.2	304.7	304.7	223.4
37	BDS/BSS639	BDS/BSS639 LED140/740	11475	81.0	141.7	1.558	1.558	1.168	1.168	0.857	1238.3	928.7	928.7	681.1
38	BDS/BSS639	BDS/BSS639 LED50/740	4263	29.5	144.5	0.567	0.567	0.425	0.425	0.312	451.0	338.2	338.2	248.0

39	BDS/BSS639	BDS/BSS639 LED60/740	5046	35.0	144.2	0.673	0.673	0.505	0.505	0.370	535.1	401.3	401.3	294.3
40	BDS/BSS639	BDS/BSS639 LED70/740	5848	40.5	144.4	0.779	0.779	0.584	0.584	0.428	619.2	464.4	464.4	340.5
41	BDS/BSS639	BDS/BSS639 LED80/740	6708	46.5	144.3	0.894	0.894	0.671	0.671	0.492	710.9	533.2	533.2	391.0
42	BDS/BSS639	BDS/BSS639 LED90/740	7480	53.0	141.1	1.019	1.019	0.764	0.764	0.561	810.3	607.7	607.7	445.6
43	BDS/BSS639	BDS/BSS639 LED100/827	8330	79.0	105.4	1.519	1.519	1.139	1.139	0.836	1207.8	905.8	905.8	664.3
44	BDS/BSS639	BDS/BSS639 LED110/827	8820	87.0	101.4	1.673	1.673	1.255	1.255	0.920	1330.1	997.5	997.5	731.5
45	BDS/BSS639	BDS/BSS639 LED120/827	9660	95.0	101.7	1.827	1.827	1.370	1.370	1.005	1452.4	1089.3	1089.3	798.8
46	BDS/BSS639	BDS/BSS639 LED130/827	10500	104.0	101.0	2.000	2.000	1.500	1.500	1.100	1590.0	1192.5	1192.5	874.5
47	BDS/BSS639	BDS/BSS639 LED140/827	10790	112.0	96.3	2.154	2.154	1.615	1.615	1.185	1712.3	1284.2	1284.2	941.7
48	BDS/BSS639	BDS/BSS639 LED40/827	3393	32.5	104.4	0.625	0.625	0.469	0.469	0.344	496.9	372.6	372.6	273.3
49	BDS/BSS639	BDS/BSS639 LED50/827	4214	40.0	105.4	0.769	0.769	0.577	0.577	0.423	611.5	458.6	458.6	336.3
50	BDS/BSS639	BDS/BSS639 LED60/827	4988	48.0	103.9	0.923	0.923	0.692	0.692	0.508	733.8	550.4	550.4	403.6
51	BDS/BSS639	BDS/BSS639 LED70/827	5780	56.0	103.2	1.077	1.077	0.808	0.808	0.592	856.1	642.1	642.1	470.9
52	BDS/BSS639	BDS/BSS639 LED80/827	6384	64.0	99.8	1.231	1.231	0.923	0.923	0.677	978.4	733.8	733.8	538.1
53	BDS/BSS639	BDS/BSS639 LED90/827	7224	72.0	100.3	1.385	1.385	1.038	1.038	0.762	1100.7	825.6	825.6	605.4

54	BDS/BSS639	BDS/BSS639 LED100/830	8330	73.0	114.1	1.404	1.404	1.053	1.053	0.772	1116.0	837.0	837.0	613.8
55	BDS/BSS639	BDS/BSS639 LED110/830	8925	81.0	110.2	1.558	1.558	1.168	1.168	0.857	1238.3	928.7	928.7	681.1
56	BDS/BSS639	BDS/BSS639 LED120/830	9660	88.0	109.8	1.692	1.692	1.269	1.269	0.931	1345.3	1009.0	1009.0	739.9
57	BDS/BSS639	BDS/BSS639 LED130/830	10500	96.0	109.4	1.846	1.846	1.385	1.385	1.015	1467.6	1100.7	1100.7	807.2
58	BDS/BSS639	BDS/BSS639 LED140/830	11340	104.0	109.0	2.000	2.000	1.500	1.500	1.100	1590.0	1192.5	1192.5	874.5
59	BDS/BSS639	BDS/BSS639 LED40/830	3393	30.0	113.1	0.577	0.577	0.433	0.433	0.317	458.6	344.0	344.0	252.3
60	BDS/BSS639	BDS/BSS639 LED50/830	4214	37.5	112.4	0.721	0.721	0.541	0.541	0.397	573.3	430.0	430.0	315.3
61	BDS/BSS639	BDS/BSS639 LED60/830	4988	44.5	112.1	0.856	0.856	0.642	0.642	0.471	680.3	510.2	510.2	374.2
62	BDS/BSS639	<u>BDS/BSS639 LED70/830</u>	5780	52.0	111.2	1.000	1.000	0.750	0.750	0.550	795.0	596.2	596.2	437.2
63	BDS/BSS639	BDS/BSS639 LED80/830	6460	60.0	107.7	1.154	1.154	0.865	0.865	0.635	917.3	688.0	688.0	504.5
64	BDS/BSS639	BDS/BSS639 LED90/830	7224	68.0	106.2	1.308	1.308	0.981	0.981	0.719	1039.6	779.7	779.7	571.8
65	BDS/BSS639	BDS/BSS639 LED100/840	8160	71.0	114.9	1.365	1.365	1.024	1.024	0.751	1085.4	814.1	814.1	597.0
66	BDS/BSS639	BDS/BSS639 LED110/840	8925	79.0	113.0	1.519	1.519	1.139	1.139	0.836	1207.8	905.8	905.8	664.3
67	BDS/BSS639	BDS/BSS639 LED120/840	9660	85.0	113.6	1.635	1.635	1.226	1.226	0.899	1299.5	974.6	974.6	714.7
68	BDS/BSS639	BDS/BSS639 LED130/840	10500	93.0	112.9	1.788	1.788	1.341	1.341	0.984	1421.8	1066.3	1066.3	782.0

69	BDS/BSS639	BDS/BSS639 LED140/840	11340	100.0	113.4	1.923	1.923	1.442	1.442	1.058	1528.8	1146.6	1146.6	840.8
70	BDS/BSS639	BDS/BSS639 LED40/840	3393	29.0	117.0	0.558	0.558	0.418	0.418	0.307	443.4	332.5	332.5	243.8
71	BDS/BSS639	BDS/BSS639 LED50/840	4214	36.5	115.5	0.702	0.702	0.526	0.526	0.386	558.0	418.5	418.5	306.9
72	BDS/BSS639	BDS/BSS639 LED60/840	4988	43.0	116.0	0.827	0.827	0.620	0.620	0.455	657.4	493.0	493.0	361.6
73	BDS/BSS639	BDS/BSS639 LED70/840	5848	51.0	114.7	0.981	0.981	0.736	0.736	0.539	779.7	584.8	584.8	428.8
74	BDS/BSS639	BDS/BSS639 LED80/840	6460	58.0	111.4	1.115	1.115	0.837	0.837	0.613	886.7	665.0	665.0	487.7
75	BDS/BSS639	BDS/BSS639 LED90/840	7224	65.0	111.1	1.250	1.250	0.938	0.938	0.688	993.7	745.3	745.3	546.5

PEP ECOPASSPORT ALIGNED

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from a reference variant of a product family, based on various light management functions, the lumen output (O_{lum}) and reference service life (RSL) of each product within the same product family.

To calculate the Scaled Impact ($S_{I_{pep}}$), we have followed the below methods:

1. Calculate the power scaling factor (PSF), which is the ratio of the power input of the variant in questions P_{in} and the power input of the base variant P_{base} .

$$PSF = \frac{P_{in}}{P_{base}}$$

2. Using this scaled GWP, we then can apply the PEP Ecopassport method for calculating the environmental impact of the functional unit for a luminary (1000 lumens over 35000 hours), applied to B6, where the Functional Unit application considers the lumen output (O_{lum}) and reference service lifetime (RSL) of the product to estimate the final environmental impact. The scaled impact ($S_{I_{pep}}$) is presented in Table A4.

$$GSF = \frac{FU_{pep}}{FU_p} = \frac{1,000}{O_{lum}} * \frac{35,000}{RSL}$$

3. Calculate the GWP scaling factor ($PGSF$), by multiplying the PSF by the GSF.

$$PGSF = PSF * GSF$$

- Calculate the Total Scaling factor by multiplying the PSF by the control scaling factor (CSF), where the CSF is determined according the relevant control factor scenario (e.g. if the luminaire has a presence detection system), as presented in Table A1.

$$TSF = PGSF * CSF$$

Table 3: Light management functions (PEP EcoPassport aligned)

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

- Lastly, the GWP of the base variant is then scaled by the TSF.

$$Scaled\ GWP = GWP_{case} * TSF$$

Table 4: Impact per scaling factor (PEP EcoPassport aligned)

	12NC or Product Family Code	Description	Flux [Lm]	Power [W]	Efficacy [L/W]	PSF	Total Scaling Factor (TSF)				Scaled Impacts (GWP100 B6 - kg CO2eq.)			
							NC	DD	PS	DD+PS	NC	DD	PS	DD+PS
1	BDS/BSS639	BDS/BSS639 LED100/722	8330	79.0	105.4	1.519	0.064	0.048	0.048	0.035	50.7	38.1	38.1	27.9
2	BDS/BSS639	BDS/BSS639 LED110/722	8820	87.0	101.4	1.673	0.066	0.050	0.050	0.037	52.8	39.6	39.6	29.0
3	BDS/BSS639	BDS/BSS639 LED120/722	9660	95.0	101.7	1.827	0.066	0.050	0.050	0.036	52.6	39.5	39.5	28.9
4	BDS/BSS639	BDS/BSS639 LED130/722	10500	104.0	101.0	2.000	0.067	0.050	0.050	0.037	53.0	39.7	39.7	29.1
5	BDS/BSS639	BDS/BSS639 LED140/722	10790	112.0	96.3	2.154	0.070	0.052	0.052	0.038	55.5	41.7	41.7	30.5
6	BDS/BSS639	BDS/BSS639 LED40/722	3393	32.5	104.4	0.625	0.064	0.048	0.048	0.035	51.3	38.4	38.4	28.2
7	BDS/BSS639	BDS/BSS639 LED50/722	4214	40.0	105.4	0.769	0.064	0.048	0.048	0.035	50.8	38.1	38.1	27.9
8	BDS/BSS639	BDS/BSS639 LED60/722	4988	48.0	103.9	0.9	0.1	0.0	0.0	0.0	51.5	38.6	38.6	28.3
9	BDS/BSS639	BDS/BSS639 LED70/722	5780	56.0	103.2	1.1	0.1	0.0	0.0	0.0	51.8	38.9	38.9	28.5
10	BDS/BSS639	BDS/BSS639 LED80/722	6384	64.0	99.8	1.2	0.1	0.1	0.1	0.0	53.6	40.2	40.2	29.5
11	BDS/BSS639	BDS/BSS639 LED90/722	7224	72.0	100.3	1.4	0.1	0.1	0.1	0.0	53.3	40.0	40.0	29.3
12	BDS/BSS639	BDS/BSS639 LED100/727	8330	67.0	124.3	1.3	0.1	0.0	0.0	0.0	43.0	32.3	32.3	23.7

13	BDS/BSS639	BDS/BSS639 LED110/727	8820	75.0	117.6	1.4	0.1	0.0	0.0	0.0	45.5	34.1	34.1	25.0
14	BDS/BSS639	BDS/BSS639 LED120/727	9660	81.0	119.3	1.6	0.1	0.0	0.0	0.0	44.9	33.7	33.7	24.7
15	BDS/BSS639	BDS/BSS639 LED130/727	10500	88.0	119.3	1.7	0.1	0.0	0.0	0.0	44.8	33.6	33.6	24.7
16	BDS/BSS639	BDS/BSS639 LED140/727	11340	95.0	119.4	1.8	0.1	0.0	0.0	0.0	44.8	33.6	33.6	24.7
17	BDS/BSS639	BDS/BSS639 LED40/727	3393	28.0	121.2	0.5	0.1	0.0	0.0	0.0	44.2	33.1	33.1	24.3
18	BDS/BSS639	BDS/BSS639 LED50/727	4214	34.5	122.1	0.7	0.1	0.0	0.0	0.0	43.8	32.9	32.9	24.1
19	BDS/BSS639	BDS/BSS639 LED60/727	4988	41.0	121.7	0.8	0.1	0.0	0.0	0.0	44.0	33.0	33.0	24.2
20	BDS/BSS639	BDS/BSS639 LED70/727	5780	48.0	120.4	0.9	0.1	0.0	0.0	0.0	44.4	33.3	33.3	24.4
21	BDS/BSS639	BDS/BSS639 LED80/727	6384	55.0	116.1	1.1	0.1	0.0	0.0	0.0	46.1	34.6	34.6	25.4
22	BDS/BSS639	BDS/BSS639 LED90/727	7224	62.0	116.5	1.2	0.1	0.0	0.0	0.0	45.9	34.4	34.4	25.3
23	BDS/BSS639	BDS/BSS639 LED100/730	8428	61.0	138.2	1.2	0.0	0.0	0.0	0.0	38.7	29.0	29.0	21.3
24	BDS/BSS639	BDS/BSS639 LED110/730	8925	67.0	133.2	1.3	0.1	0.0	0.0	0.0	40.2	30.1	30.1	22.1
25	BDS/BSS639	BDS/BSS639 LED120/730	9775	73.0	133.9	1.4	0.1	0.0	0.0	0.0	40.0	30.0	30.0	22.0
26	BDS/BSS639	BDS/BSS639 LED130/730	10625	80.0	132.8	1.5	0.1	0.0	0.0	0.0	40.3	30.2	30.2	22.2
27	BDS/BSS639	BDS/BSS639 LED140/730	11340	85.0	133.4	1.6	0.1	0.0	0.0	0.0	40.1	30.1	30.1	22.1

28	BDS/BSS639	BDS/BSS639 LED50/730	4263	31.0	137.5	0.6	0.0	0.0	0.0	0.0	38.9	29.2	29.2	21.4
29	BDS/BSS639	BDS/BSS639 LED60/730	5160	37.5	137.6	0.7	0.0	0.0	0.0	0.0	38.9	29.2	29.2	21.4
30	BDS/BSS639	BDS/BSS639 LED70/730	5848	43.0	136.0	0.8	0.0	0.0	0.0	0.0	39.3	29.5	29.5	21.6
31	BDS/BSS639	BDS/BSS639 LED80/730	6630	49.5	133.9	1.0	0.1	0.0	0.0	0.0	39.9	30.0	30.0	22.0
32	BDS/BSS639	BDS/BSS639 LED90/730	7480	56.0	133.6	1.1	0.1	0.0	0.0	0.0	40.1	30.0	30.0	22.0
33	BDS/BSS639	BDS/BSS639 LED100/740	8428	58.0	145.3	1.1	0.0	0.0	0.0	0.0	36.8	27.6	27.6	20.3
34	BDS/BSS639	BDS/BSS639 LED110/740	9030	63.0	143.3	1.2	0.0	0.0	0.0	0.0	37.3	28.0	28.0	20.5
35	BDS/BSS639	BDS/BSS639 LED120/740	9775	69.0	141.7	1.3	0.0	0.0	0.0	0.0	37.8	28.3	28.3	20.8
36	BDS/BSS639	BDS/BSS639 LED130/740	10625	75.0	141.7	1.4	0.0	0.0	0.0	0.0	37.8	28.3	28.3	20.8
37	BDS/BSS639	BDS/BSS639 LED140/740	11475	81.0	141.7	1.6	0.0	0.0	0.0	0.0	37.8	28.3	28.3	20.8
38	BDS/BSS639	BDS/BSS639 LED50/740	4263	29.5	144.5	0.6	0.0	0.0	0.0	0.0	37.0	27.8	27.8	20.4
39	BDS/BSS639	BDS/BSS639 LED60/740	5046	35.0	144.2	0.7	0.0	0.0	0.0	0.0	37.1	27.8	27.8	20.4
40	BDS/BSS639	BDS/BSS639 LED70/740	5848	40.5	144.4	0.8	0.0	0.0	0.0	0.0	37.1	27.8	27.8	20.4
41	BDS/BSS639	BDS/BSS639 LED80/740	6708	46.5	144.3	0.9	0.0	0.0	0.0	0.0	37.1	27.8	27.8	20.4
42	BDS/BSS639	BDS/BSS639 LED90/740	7480	53.0	141.1	1.0	0.0	0.0	0.0	0.0	37.9	28.4	28.4	20.9

43	BDS/BSS639	BDS/BSS639 LED100/827	8330	79.0	105.4	1.5	0.1	0.0	0.0	0.0	50.7	38.1	38.1	27.9
44	BDS/BSS639	BDS/BSS639 LED110/827	8820	87.0	101.4	1.7	0.1	0.0	0.0	0.0	52.8	39.6	39.6	29.0
45	BDS/BSS639	BDS/BSS639 LED120/827	9660	95.0	101.7	1.8	0.1	0.0	0.0	0.0	52.6	39.5	39.5	28.9
46	BDS/BSS639	BDS/BSS639 LED130/827	10500	104.0	101.0	2.0	0.1	0.1	0.1	0.0	53.0	39.7	39.7	29.1
47	BDS/BSS639	BDS/BSS639 LED140/827	10790	112.0	96.3	2.2	0.1	0.1	0.1	0.0	55.5	41.7	41.7	30.5
48	BDS/BSS639	BDS/BSS639 LED40/827	3393	32.5	104.4	0.6	0.1	0.0	0.0	0.0	51.3	38.4	38.4	28.2
49	BDS/BSS639	BDS/BSS639 LED50/827	4214	40.0	105.4	0.8	0.1	0.0	0.0	0.0	50.8	38.1	38.1	27.9
50	BDS/BSS639	BDS/BSS639 LED60/827	4988	48.0	103.9	0.9	0.1	0.0	0.0	0.0	51.5	38.6	38.6	28.3
51	BDS/BSS639	BDS/BSS639 LED70/827	5780	56.0	103.2	1.1	0.1	0.0	0.0	0.0	51.8	38.9	38.9	28.5
52	BDS/BSS639	BDS/BSS639 LED80/827	6384	64.0	99.8	1.2	0.1	0.1	0.1	0.0	53.6	40.2	40.2	29.5
53	BDS/BSS639	BDS/BSS639 LED90/827	7224	72.0	100.3	1.4	0.1	0.1	0.1	0.0	53.3	40.0	40.0	29.3
54	BDS/BSS639	BDS/BSS639 LED100/830	8330	73.0	114.1	1.4	0.1	0.0	0.0	0.0	46.9	35.2	35.2	25.8
55	BDS/BSS639	BDS/BSS639 LED110/830	8925	81.0	110.2	1.6	0.1	0.0	0.0	0.0	48.6	36.4	36.4	26.7
56	BDS/BSS639	BDS/BSS639 LED120/830	9660	88.0	109.8	1.7	0.1	0.0	0.0	0.0	48.7	36.6	36.6	26.8
57	BDS/BSS639	BDS/BSS639 LED130/830	10500	96.0	109.4	1.8	0.1	0.0	0.0	0.0	48.9	36.7	36.7	26.9

58	BDS/BSS639	BDS/BSS639 LED140/830	11340	104.0	109.0	2.0	0.1	0.0	0.0	0.0	49.1	36.8	36.8	27.0
59	BDS/BSS639	BDS/BSS639 LED40/830	3393	30.0	113.1	0.6	0.1	0.0	0.0	0.0	47.3	35.5	35.5	26.0
60	BDS/BSS639	BDS/BSS639 LED50/830	4214	37.5	112.4	0.7	0.1	0.0	0.0	0.0	47.6	35.7	35.7	26.2
61	BDS/BSS639	BDS/BSS639 LED60/830	4988	44.5	112.1	0.9	0.1	0.0	0.0	0.0	47.7	35.8	35.8	26.3
62	BDS/BSS639	<u>BDS/BSS639 LED70/830</u>	5780	52.0	111.2	1.0	0.1	0.0	0.0	0.0	48.1	36.1	36.1	26.5
63	BDS/BSS639	BDS/BSS639 LED80/830	6460	60.0	107.7	1.2	0.1	0.0	0.0	0.0	49.7	37.3	37.3	27.3
64	BDS/BSS639	BDS/BSS639 LED90/830	7224	68.0	106.2	1.3	0.1	0.0	0.0	0.0	50.4	37.8	37.8	27.7
65	BDS/BSS639	BDS/BSS639 LED100/840	8160	71.0	114.9	1.4	0.1	0.0	0.0	0.0	46.6	34.9	34.9	25.6
66	BDS/BSS639	BDS/BSS639 LED110/840	8925	79.0	113.0	1.5	0.1	0.0	0.0	0.0	47.4	35.5	35.5	26.0
67	BDS/BSS639	BDS/BSS639 LED120/840	9660	85.0	113.6	1.6	0.1	0.0	0.0	0.0	47.1	35.3	35.3	25.9
68	BDS/BSS639	BDS/BSS639 LED130/840	10500	93.0	112.9	1.8	0.1	0.0	0.0	0.0	47.4	35.5	35.5	26.1
69	BDS/BSS639	BDS/BSS639 LED140/840	11340	100.0	113.4	1.9	0.1	0.0	0.0	0.0	47.2	35.4	35.4	26.0
70	BDS/BSS639	BDS/BSS639 LED40/840	3393	29.0	117.0	0.6	0.1	0.0	0.0	0.0	45.7	34.3	34.3	25.2
71	BDS/BSS639	BDS/BSS639 LED50/840	4214	36.5	115.5	0.7	0.1	0.0	0.0	0.0	46.3	34.8	34.8	25.5
72	BDS/BSS639	BDS/BSS639 LED60/840	4988	43.0	116.0	0.8	0.1	0.0	0.0	0.0	46.1	34.6	34.6	25.4

73	BDS/BSS639	BDS/BSS639 LED70/840	5848	51.0	114.7	1.0	0.1	0.0	0.0	0.0	46.7	35.0	35.0	25.7
74	BDS/BSS639	BDS/BSS639 LED80/840	6460	58.0	111.4	1.1	0.1	0.0	0.0	0.0	48.0	36.0	36.0	26.4
75	BDS/BSS639	BDS/BSS639 LED90/840	7224	65.0	111.1	1.3	0.1	0.0	0.0	0.0	48.1	36.1	36.1	26.5