



ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH EN 15804+A2 & ISO 14025

EPD HUB, HUB-5639

Published on 06.03.2026, last updated on 06.03.2026, valid until 06.03.2031

Basic Ball (Glass-sphere)

RZB Rudolf Zimmermann, Bamberg GmbH



This EPD is intended for business-to-business and/or business-to-consumer communication. Life Cycle Assessment study has been performed in accordance with the requirements of EN 15804, EPD Hub PCR version 1.2 (24 Mar 2025) and JRC characterization factors EF 3.1. The manufacturer has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804 and if they are not compared in a building context.

MANUFACTURER AND SITE

Manufacturer	RZB Rudolf Zimmermann, Bamberg GmbH
Address	Rheinstraße 16, 96052, Bamberg
Contact details	info@rzb-leuchten.de
Website	www.rzb.de
Place of production	Germany, Bamberg
Place(s) of raw material origin	Poland, Germany
Place(s) of installation and use	Germany, Europe
Period for data	12/2024-12/2025

EPD STANDARDS, SCOPE AND VERIFICATION

Program operator	EPD Hub, hub@epdhub.com
Reference standard	EN 15804:2012+A2:2019/AC:2021 and ISO 14025
PCR	EPD Hub Core PCR version 1.2, 24 Mar 2025
Sector	Electrical product
Category of EPD	Third party verified EPD
Parent EPD number	-
Scope of the EPD	Cradle to gate with options, A4-A5, B6, and modules C1-C4, D
EPD author	Sergio Drawert
EPD verification	Independent verification of this EPD and data, according to ISO 14025: <input checked="" type="checkbox"/> Internal verification <input type="checkbox"/> External verification
EPD verifier	EPD Hub Limited

PRODUCT SPECIFICATION

Product name	Basic Ball (Glass-sphere)
Product number / reference	312119.002.76
GTIN (Global Trade Item Number)	4051859164791
NOBB (Norwegian Building Product Database)	-
A1-A3 Specific data (%)	0,69

PRODUCT CLASSIFICATION

Declared operating voltage, Volt	220 - 240
Light source color temperature, Kelvin	3000
Protection index for water and dust (IP)	40
Impact resistance index (IK)	2
Luminous flux, Lumen	8500
Electrical power, Watt	79
Luminous efficiency, Lm/W	108

PRODUCT DESCRIPTION

Basic Ball: A pendant luminaire in timelessly classic sphere design. Base: metal, chrome. Canopy: metal, chrome-plated. Diffuser made of mouth-blown opal glass, satin finish. Shadow-free, homogeneous and soft illumination. Incl. mounting plate with connecting terminal and mounting material for pendant tube.

ABOUT THE MANUFACTURER

Manufacturer of high-quality luminaires for professional indoor, outdoor, and safety lighting applications. Developed and produced in Bamberg, Germany, the products are characterized by high standards in design, material quality, and energy-efficient LED technology, based on sustainable and resource-saving manufacturing processes.

ENVIRONMENTAL DATA SUMMARY

Declared unit	1 unit
Declared unit mass, kg	6,7
Mass of packaging, kg	2,07
Functional unit	Provide lighting that delivers an outgoing artificial luminous flux of 1,000 lumens during a reference lifetime of 35,000 hours
Reference service life (years)	20
Assigned lifetime (hours)	50000
GWP-total, A1-A3 (kg CO ₂ e)	48,1
GWP-fossil, A1-A3 (kg CO ₂ e)	50,8
Secondary material, inputs (%)	45,8
Secondary material, outputs (%)	61,7
Total energy use, A1-A3 (kWh)	168
Net freshwater use, A1-A3 (m ³)	2,79E-01

LIFE CYCLE ASSESSMENT

SYSTEM BOUNDARY

This EPD covers the life-cycle modules listed in the following table.

Product stage	Assembly stage					Use stage							End of life stage				Beyond the system boundaries	
	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D	
Raw materials	X																	
Transport	X																	
Manufacturing		X																
Transport			X															
Assembly				X														
Use					X													
Maintenance						ND												
Repair							ND											
Replacement								ND										
Refurbishment									ND									
Operational energy use										X								
Operational water use											ND							
Deconstr./demo.												X						
Transport													X					
Waste processing														X				
Disposal															X			
Reuse, Recovery, Recycling																X		

Modules not declared = ND.

CUT-OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the reference standard and the applied PCR. The study does not exclude any hazardous materials or substances. There is no neglected unit process more than 1% of total mass or energy flows. The module-specific total neglected input and output flows also do not exceed 5% of energy usage or mass. Auxiliary packaging materials, specifically adhesive tape and labels have been excluded from the system boundary. The total mass of these components represents significantly less than 1% of the overall product weight, satisfying the applied cut-off criteria. Consequently, their contribution to the total environmental impact is considered negligible and falls within the permissible thresholds defined by the PCR.

The production of capital equipment, construction activities, and infrastructure, maintenance and operation of capital equipment, personnel-related activities, energy and water use related to company management and sales activities are excluded.

VALIDATION OF DATA

Data collection for production, transport, and packaging was conducted using time and site-specific information, as defined in the general information section on page 1 and 2. Upstream process calculations rely on generic data as defined in the Bibliography section. Manufacturer-provided specific and generic data were used for the product's manufacturing stage. The analysis was performed in One Click LCA EPD Generator, with the 'Cut-Off, EN 15804+A2' allocation method, and characterization factors according to EN 15804:2012+A2:2019/AC:2021 and JRC EF 3.1.

ALLOCATION, ESTIMATES AND ASSUMPTIONS

All allocations are done as per the reference standards and the applied PCR. In this study, allocation has been done in the following ways:

Data type	Allocation
Raw materials	No allocation
Packaging materials	No allocation
Ancillary materials	Allocated by mass
Manufacturing energy and waste	Allocated by mass

PRODUCT & MANUFACTURING SITES GROUPING

Type of grouping	No grouping
Grouping method	Not applicable
Variation in GWP-fossil for A1-A3, %	-

This EPD is product and factory specific.

PRODUCT RAW MATERIAL MAIN COMPOSITION

Raw material category	Amount, mass- %	Material origin
Metals	50	EU, China
Minerals	44	Poland
Fossil materials	1	Germany
Bio-based materials	0	-
Electronic parts	5	Italy

BIOGENIC CARBON CONTENT

Product's biogenic carbon content at the factory gate

Biogenic carbon content in product, kg C	0
Biogenic carbon content in packaging, kg C	0,02

SUBSTANCES, REACH - VERY HIGH CONCERN

The product does not contain any REACH SVHC substances in amounts greater than 0,1 % (1000 ppm).

LCA SOFTWARE AND BIBLIOGRAPHY

The LCA and EPD have been prepared according to the reference standards, EN 50693, and ISO 14040/14044. Ecoinvent v3.10.1/3.11 and One Click LCA databases were used as sources of environmental data. Allocation used in Ecoinvent 3.10.1/3.11 environmental data sources follow the methodology 'allocation, cut-off, EN 15804+A2'.

PRODUCT LIFE CYCLE

MANUFACTURING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production. The material losses occurring during the manufacturing processes are treated as per the waste handling practices in the factory, while scenario assumptions are made in the absence of exact data. The study also considers the fuels used by machines as well as losses during electricity transmission. Hydro run power plant located in Sweden. A market-based approach is used in modelling the electricity mix utilized in the factory. The used energy for manufacturing is:

1. Energy supply, electricity production, hydro, Electricity production, hydro, run-of-river, Sweden,ecoinvent 3.10.1, 0.0044 kgCO₂e/kWh

The product is made of metals, plastics, and electronic components. All components are transported to the production facility, where the main manufacturing processes are associated with assembly of different parts and components. The finished product is packaged with polyethylene, cardboard, and/or paper as packaging material before being sent to customers.

TRANSPORT AND INSTALLATION (A4-A5)

Transportation distances from manufacturing sites to customer locations are based on sales volume-based weighted averages. In the absence of exact data, conservative assumptions are made (A4). Environmental impacts from installation include waste packaging materials (A5). The impacts of energy consumption and the used ancillary materials during installation are considered negligible.


PRODUCT USE AND MAINTENANCE (B1-B7)

During the use phase, the product consumes electricity (B6). Impacts due to electricity production include direct emissions to air, transformation, and transmission losses. This EPD follows additional requirements for products using energy in module B6 of the use stage and permanently installed into building or infrastructure. In this case the luminaire is mainly used indoor e.g. office or hallways.

PRODUCT END OF LIFE (C1-C4, D)

Consumption of energy and natural resources in demotion process is assumed to be negligible. It is assumed that the waste is collected separately and transported to the waste treatment centre. The transport distance is 150 km while the transportation method is assumed to be lorry (C2). According to EN 50693:2019, the sequence of treatment operations occurring to the product shall include de-pollution, fractions separation and preparation (dismantling, crushing, shredding, sorting), recycling, other material recovery, energy recovery and disposal. In this study, the default values from table G.4 of EN 50693 is used for treating materials in different waste treatment methods. Due to the material and energy recovery potential of parts in the lighting system, the end-of-life product is converted into recycled raw materials, while the energy recovered from incineration displaces electricity and heat production (D). The benefits and loads of incineration and recycling are included in Module D.

LIFE CYCLE FLOW DIAGRAM

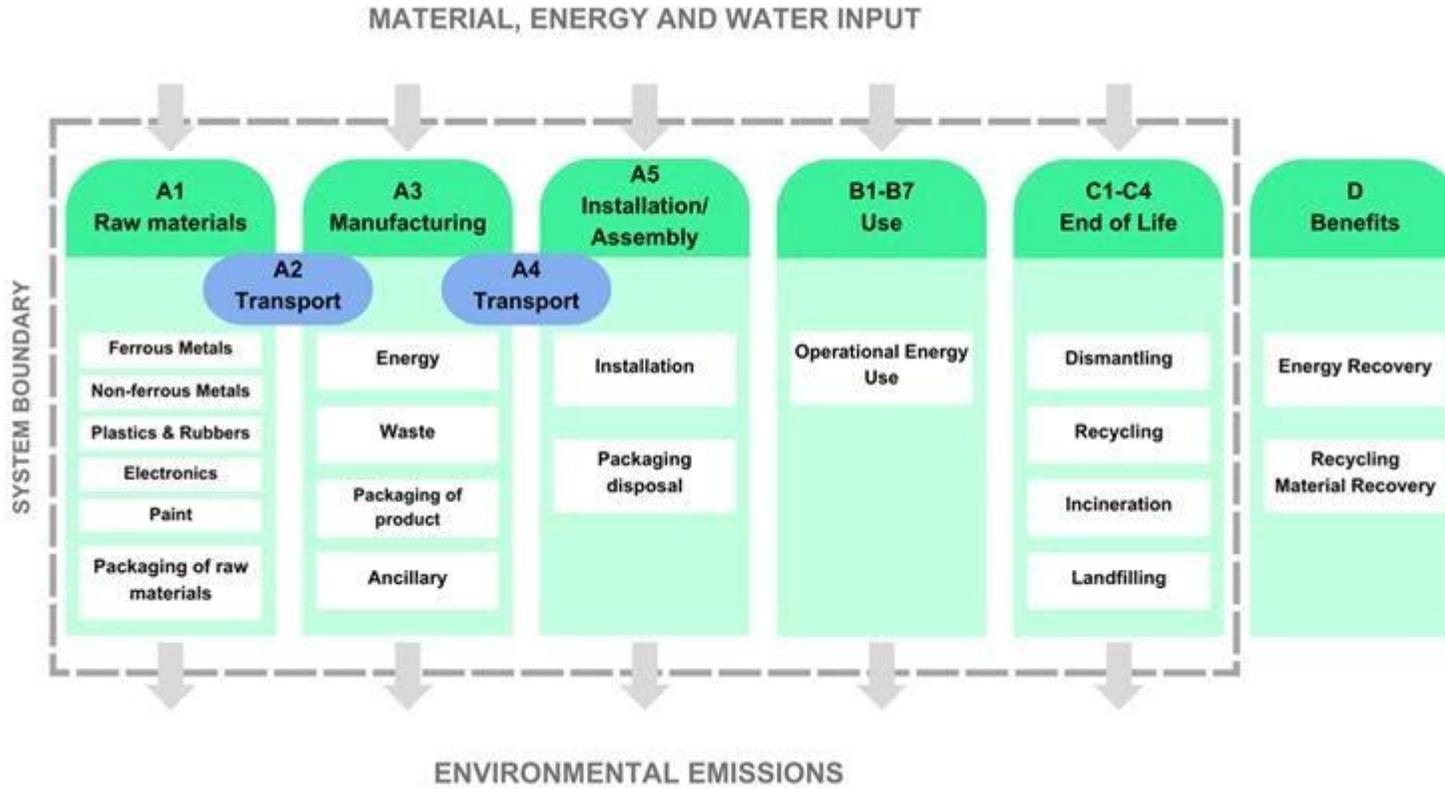

ENVIRONMENTAL IMPACT DATA, RESULTS PER DECLARED UNIT

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding threshold values, safety margins or risks.

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total ¹⁾	kg CO ₂ e	4,84E+01	2,29E-01	-4,53E-01	4,81E+01	4,72E-01	2,67E+00	ND	ND	ND	ND	ND	1,30E+03	ND	0,00E+00	0,00E+00	2,44E-01	1,12E-01	2,26E+00
GWP – fossil	kg CO ₂ e	4,82E+01	2,29E-01	2,34E+00	5,08E+01	4,72E-01	5,91E-02	ND	ND	ND	ND	ND	1,29E+03	ND	0,00E+00	0,00E+00	2,44E-01	1,12E-01	3,03E+00
GWP – biogenic	kg CO ₂ e	9,95E-02	5,19E-05	-2,85E+00	-2,75E+00	1,07E-04	2,61E+00	ND	ND	ND	ND	ND	2,90E+00	ND	0,00E+00	0,00E+00	-2,85E-04	-8,43E-05	-7,80E-01
GWP – LULUC	kg CO ₂ e	1,69E-02	1,03E-04	6,03E-02	7,73E-02	2,11E-04	3,20E-05	ND	ND	ND	ND	ND	3,97E+00	ND	0,00E+00	0,00E+00	1,74E-04	6,82E-05	7,55E-03
Ozone depletion pot.	kg CFC-11e	2,96E-07	3,38E-09	5,45E-08	3,54E-07	6,97E-09	3,54E-10	ND	ND	ND	ND	ND	2,38E-05	ND	0,00E+00	0,00E+00	1,18E-09	8,99E-10	2,79E-08
Acidification potential	mol H ⁺ e	5,74E-01	7,81E-04	1,24E-02	5,87E-01	1,61E-03	2,30E-04	ND	ND	ND	ND	ND	7,60E+00	ND	0,00E+00	0,00E+00	9,77E-04	2,77E-04	1,81E-02
EP-freshwater ²⁾	kg Pe	3,39E-02	1,78E-05	1,15E-03	3,51E-02	3,67E-05	1,18E-05	ND	ND	ND	ND	ND	1,20E+00	ND	0,00E+00	0,00E+00	5,54E-05	7,21E-06	1,09E-03
EP-marine	kg Ne	6,48E-02	2,57E-04	5,92E-03	7,10E-02	5,29E-04	3,28E-04	ND	ND	ND	ND	ND	1,19E+00	ND	0,00E+00	0,00E+00	2,28E-04	1,69E-04	3,65E-03
EP-terrestrial	mol Ne	6,84E-01	2,79E-03	3,50E-02	7,21E-01	5,75E-03	6,66E-04	ND	ND	ND	ND	ND	1,07E+01	ND	0,00E+00	0,00E+00	2,50E-03	1,15E-03	3,59E-02
POCP (“smog”) ³⁾	kg NMVOCe	2,10E-01	1,15E-03	1,08E-02	2,22E-01	2,37E-03	2,69E-04	ND	ND	ND	ND	ND	3,52E+00	ND	0,00E+00	0,00E+00	7,37E-04	3,79E-04	1,15E-02
ADP-minerals & metals ⁴⁾	kg Sbe	2,11E-03	6,39E-07	8,51E-06	2,12E-03	1,32E-06	3,98E-07	ND	ND	ND	ND	ND	1,75E-02	ND	0,00E+00	0,00E+00	4,15E-06	1,22E-07	1,39E-05
ADP-fossil resources	MJ	5,28E+02	3,33E+00	3,16E+01	5,62E+02	6,85E+00	3,78E-01	ND	ND	ND	ND	ND	3,01E+04	ND	0,00E+00	0,00E+00	1,40E+00	7,86E-01	3,58E+01
Water use ⁵⁾	m ³ e depr.	2,21E+01	1,64E-02	9,41E-01	2,31E+01	3,38E-02	2,30E-02	ND	ND	ND	ND	ND	8,20E+02	ND	0,00E+00	0,00E+00	3,01E-02	1,17E-02	1,82E+00

1) GWP = Global Warming Potential. 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO4e. 3) POCP = Photochemical ozone formation. 4) ADP = Abiotic depletion potential. 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Particulate matter	Incidence	3,09E-06	2,29E-08	2,31E-07	3,34E-06	4,73E-08	2,35E-09	ND	ND	ND	ND	ND	2,71E-05	ND	0,00E+00	0,00E+00	1,29E-08	6,65E-09	2,89E-07
Ionizing radiation ⁶⁾	kBq U235e	2,98E+00	2,90E-03	1,41E-01	3,12E+00	5,97E-03	3,90E-03	ND	ND	ND	ND	ND	8,31E+02	ND	0,00E+00	0,00E+00	7,18E-03	8,97E-04	2,58E-01
Ecotoxicity (freshwater)	CTUe	3,01E+02	4,70E-01	1,33E+01	3,15E+02	9,69E-01	8,21E+00	ND	ND	ND	ND	ND	4,58E+03	ND	0,00E+00	0,00E+00	9,17E-01	4,70E+01	2,47E+01
Human toxicity, cancer	CTUh	3,83E-08	3,78E-11	1,42E-09	3,98E-08	7,79E-11	4,61E-11	ND	ND	ND	ND	ND	4,37E-07	ND	0,00E+00	0,00E+00	7,77E-11	6,50E-11	4,34E-09
Human tox. non-cancer	CTUh	1,94E-06	2,15E-09	3,59E-08	1,97E-06	4,43E-09	2,50E-09	ND	ND	ND	ND	ND	2,27E-05	ND	0,00E+00	0,00E+00	4,81E-09	3,15E-09	1,27E-07
SQP ⁷⁾	-	1,62E+02	3,35E+00	1,42E+02	3,08E+02	6,90E+00	3,15E-01	ND	ND	ND	ND	ND	6,69E+03	ND	0,00E+00	0,00E+00	1,83E+00	1,23E+00	3,81E+01

6) EN 15804+A2 disclaimer for Ionizing radiation, human health. This impact category deals mainly with the eventual impact of low-dose ionizing radiation on the human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon, and from some construction materials is also not measured by this indicator. 7) SQP = Land use related impacts/soil quality.

USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER as energy ⁸⁾	MJ	2,71E+01	4,56E-02	1,61E+01	4,33E+01	9,39E-02	-3,20E+01	ND	ND	ND	ND	ND	8,25E+03	ND	0,00E+00	0,00E+00	1,84E-01	1,51E-02	1,98E+00
Renew. PER as material	MJ	0,00E+00	0,00E+00	2,53E+01	2,53E+01	0,00E+00	-2,53E+01	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Total use of renew. PER	MJ	2,71E+01	4,56E-02	4,14E+01	6,85E+01	9,39E-02	-5,73E+01	ND	ND	ND	ND	ND	8,25E+03	ND	0,00E+00	0,00E+00	1,84E-01	1,51E-02	1,98E+00
Non-re. PER as energy	MJ	5,28E+02	3,33E+00	3,07E+01	5,62E+02	6,85E+00	4,07E-02	ND	ND	ND	ND	ND	3,01E+04	ND	0,00E+00	0,00E+00	-6,53E-01	-1,29E+00	3,55E+01
Non-re. PER as material	MJ	3,03E+00	0,00E+00	5,61E-01	3,59E+00	0,00E+00	-5,61E-01	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	-1,50E+00	-1,53E+00	0,00E+00
Total use of non-re. PER	MJ	5,31E+02	3,33E+00	3,13E+01	5,65E+02	6,85E+00	-5,20E-01	ND	ND	ND	ND	ND	3,01E+04	ND	0,00E+00	0,00E+00	-2,15E+00	-2,82E+00	3,55E+01
Secondary materials	kg	3,07E+00	0,00E+00	0,00E+00	3,07E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Renew. secondary fuels	MJ	2,85E-02	1,80E-05	2,03E-01	2,31E-01	3,70E-05	5,13E-06	ND	ND	ND	ND	ND	3,97E-02	ND	0,00E+00	0,00E+00	5,86E-05	1,31E-05	6,21E-04
Non-ren. secondary fuels	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of net fresh water	m ³	2,59E-01	4,92E-04	1,95E-02	2,79E-01	1,01E-03	-2,80E-04	ND	ND	ND	ND	ND	2,60E+01	ND	0,00E+00	0,00E+00	-8,72E-05	-2,82E-03	2,79E-04

8) PER = Primary energy resources.

END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg	9,77E+00	5,63E-03	1,51E-01	9,92E+00	1,16E-02	7,75E-03	ND	ND	ND	ND	ND	7,61E+01	ND	0,00E+00	0,00E+00	1,17E-02	1,05E-01	5,97E-01
Non-hazardous waste	kg	1,69E+02	1,04E-01	4,68E+00	1,74E+02	2,15E-01	1,25E+00	ND	ND	ND	ND	ND	5,89E+03	ND	0,00E+00	0,00E+00	1,41E+00	6,89E+00	2,57E+01
Radioactive waste	kg	7,42E-04	7,09E-07	3,33E-05	7,76E-04	1,46E-06	9,97E-07	ND	ND	ND	ND	ND	2,13E-01	ND	0,00E+00	0,00E+00	1,76E-06	2,20E-07	6,52E-05

END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for reuse	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for recycling	kg	7,92E-07	0,00E+00	0,00E+00	7,92E-07	0,00E+00	1,62E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	4,13E+00	0,00E+00	0,00E+00
Materials for energy rec	kg	5,70E-15	0,00E+00	0,00E+00	5,70E-15	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	9,45E-01	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	6,44E-01	0,00E+00	0,00E+00
Exported energy: Electricity	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,98E-01	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	2,71E-01	0,00E+00	0,00E+00
Exported energy: Heat	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	5,00E-01	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	3,73E-01	0,00E+00	0,00E+00

ENVIRONMENTAL IMPACTS – EN 15804+A1, CML

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Pot.	kg CO ₂ e	4,80E+01	2,28E-01	2,60E+00	5,09E+01	4,69E-01	3,11E-01	ND	ND	ND	ND	ND	1,29E+03	ND	0,00E+00	0,00E+00	2,44E-01	1,12E-01	3,04E+00
Ozone depletion Pot.	kg CFC ₁₁ e	2,62E-07	2,70E-09	5,86E-08	3,23E-07	5,56E-09	3,02E-10	ND	ND	ND	ND	ND	1,99E-05	ND	0,00E+00	0,00E+00	9,80E-10	7,22E-10	2,31E-08
Acidification	kg SO ₂ e	4,95E-01	5,97E-04	8,35E-03	5,04E-01	1,23E-03	1,78E-04	ND	ND	ND	ND	ND	6,48E+00	ND	0,00E+00	0,00E+00	7,84E-04	2,04E-04	1,49E-02
Eutrophication	kg PO ₄ ³ e	4,91E-02	1,45E-04	6,34E-03	5,55E-02	2,99E-04	2,59E-04	ND	ND	ND	ND	ND	8,38E-01	ND	0,00E+00	0,00E+00	1,22E-04	9,22E-05	3,63E-03
POCP ("smog")	kg C ₂ H ₄ e	2,76E-02	5,32E-05	9,44E-04	2,86E-02	1,10E-04	7,21E-05	ND	ND	ND	ND	ND	3,53E-01	ND	0,00E+00	0,00E+00	4,69E-05	1,99E-05	9,98E-04
ADP-elements	kg Sbe	2,10E-03	6,24E-07	8,39E-06	2,11E-03	1,28E-06	3,89E-07	ND	ND	ND	ND	ND	1,74E-02	ND	0,00E+00	0,00E+00	4,13E-06	1,16E-07	1,19E-05
ADP-fossil	MJ	4,81E+02	3,28E+00	2,93E+01	5,13E+02	6,76E+00	3,11E-01	ND	ND	ND	ND	ND	1,54E+04	ND	0,00E+00	0,00E+00	1,29E+00	7,72E-01	3,14E+01

ADDITIONAL INDICATOR – GWP-GHG

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-GHG ⁹⁾	kg CO ₂ e	4,83E+01	2,29E-01	2,40E+00	5,09E+01	4,72E-01	5,92E-02	ND	ND	ND	ND	ND	1,30E+03	ND	0,00E+00	0,00E+00	2,45E-01	1,13E-01	3,04E+00

9) This indicator includes all greenhouse gases excluding biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. In addition, the characterisation factors for the flows - CH₄ fossil, CH₄ biogenic and Dinitrogen monoxide - were updated. This indicator is identical to the GWP-total of EN 15804:2012+A2:2019 except that the characterization factor for biogenic CO₂ is set to zero.

ENVIRONMENTAL IMPACT DATA, RESULTS PER FUNCTIONAL UNIT

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding threshold values, safety margins or risks.

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total ¹⁾	kg CO ₂ éq/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
GWP – fossil	kg CO ₂ éq/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
GWP – biogenic	kg CO ₂ éq/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
GWP – LULUC	kg CO ₂ éq/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Ozone depletion pot.	kg CFC ₁₁ e/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Acidification potential	mole H ⁺ e/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
EP-freshwater ²⁾	kg Pe/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
EP-marine	kg Ne/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
EP-terrestrial	mol Ne/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
POCP (“smog”) ³⁾	kg NMVOCe/	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
ADP-minerals & metals ⁴⁾	kg Sbe/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
ADP-fossil resources	MJ/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Water use ⁵⁾	m ³ e priv. /FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

1) GWP = Global Warming Potential. 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO4e. 3) POCP = Photochemical ozone formation. 4) ADP = Abiotic depletion potential. 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Particulate matter	Incidence /FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Ionizing radiation ⁶⁾	kBq U235e/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Ecotoxicity (freshwater)	CTUe/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Human toxicity, cancer	CTUh/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Human tox. non-cancer	CTUh/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
SQP ⁷⁾	-/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

6) EN 15804+A2 disclaimer for Ionizing radiation, human health. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator. 7) SQP = Land use related impacts/soil quality.

USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER as energy ⁸⁾	MJ/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Renew. PER as material	MJ/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Total use of renew. PER	MJ/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Non-re. PER as energy	MJ/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Non-re. PER as material	MJ/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Total use of non-re. PER	MJ/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Secondary materials	kg/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Renew. secondary fuels	MJ/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Non-ren. secondary fuels	MJ/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of net fresh water	m ³ /FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

8) PER = Primary energy resources.

END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Non-hazardous waste	kg/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Radioactive waste	kg/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for re-use	kg/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for recycling	kg/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for energy rec	kg/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy	MJ/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy: Electricity	MJ/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy: Heat	MJ/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

ENVIRONMENTAL IMPACTS – EN 15804+A1, CML

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Pot.	kg CO ₂ éq./FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Ozone depletion Pot.	kg CFC ₁₁ e/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Acidification	kg SO ₂ e/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Eutrophication	kg PO ₄ ^{3e} /FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
POCP (“smog”)	kg C ₂ H ₄ e/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
ADP-elements	kg Sbe/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
ADP-fossil	MJ/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

ADDITIONAL INDICATOR – GWP-GHG

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-GHG ⁹⁾	kg CO ₂ e/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	0,00E+00	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

9) This indicator includes all greenhouse gases excluding biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. In addition, the characterisation factors for the flows - CH₄ fossil, CH₄ biogenic and Dinitrogen monoxide - were updated. This indicator is identical to the GWP-total of EN 15804:2012+A2:2019 except that the characterization factor for biogenic CO₂ is set to zero.

SCENARIO DOCUMENTATION

DATA SOURCES

Scenario parameter	Value
Manufacturing energy scenario documentation – A3 (Energy data source)	1. Energy supply, electricity production, hydro, Electricity production, hydro, run-of-river, Sweden, ecoinvent 3.10.1, 0.0044 kgCO ₂ e/kWh
Transport scenario documentation - A4	1. Transport, freight, lorry >32 metric ton, EURO5, 500.0 km
Installation scenario documentation - A5 (Waste materials data source)	1. Polyethylene production, low density, granulate, 0.0087 kg 2. Corrugated board box production, 1.847 kg 3. Graphic paper production, 100% recycled, 0.1225 kg
Use stages scenario documentation - B6-B7 (Energy data source)	1. Energy supply, electricity transformation and distribution, distribution low voltage, Market group for electricity, low voltage, Europe, 3950.0 kWh

TRANSPORT SCENARIO DOCUMENTATION - A4

Scenario parameter	Value
Capacity utilization (including empty return) %	50 %
Bulk density of transported products / kg/m ³	8,12E+01
Volume capacity utilization factor (factor: =1 or <1 or ≥1 for compressed or nested packaged products)	1

INSTALLATION SCENARIO DOCUMENTATION - A5

Scenario parameter	Value
Ancillary materials for installation (specified by material) / kg or other units as appropriate	0
Water use / m ³	0
Other resource use / kg	0
Direct emissions to ambient air, soil and water / kg	0

USE STAGES SCENARIO DOCUMENTATION - B6-B7 USE OF ENERGY AND WATER

Scenario information	Value
Ancillary materials specified by material / kg or units as appropriate	Not applicable
Net fresh water consumption / m ³	0
Power output of equipment / kW	79
Characteristic performance, e.g., energy efficiency, emissions, variation of performance with capacity utilization, etc. / Units as appropriate	
Further assumptions for scenario development, e.g., frequency and period of use, number of occupants / Units as appropriate	

END OF LIFE SCENARIO DOCUMENTATION

Scenario information	Value
Collection process – kg collected separately	6,7
Collection process – kg collected with mixed construction waste	0
Recovery process – kg for re-use	0
Recovery process – kg for recycling	4,13E+00
Recovery process – kg for energy recovery	0
Disposal (total) – kg for final deposition	2,36E+00
Scenario assumptions e.g. transportation	Lorry, 16-32 metric ton, EURO5; 150 km

THIRD-PARTY VERIFICATION STATEMENT

EPD Hub declares that this EPD is verified in accordance with ISO 14025 by an independent, third-party verifier. The project report on the Life Cycle Assessment and the report(s) on features of environmental relevance are filed at EPD Hub. EPD Hub PCR and ECO Platform verification checklist are used.

EPD Hub is not able to identify any unjustified deviations from the PCR and EN 15804+A2 in the Environmental Product Declaration and its project report.

EPD Hub maintains its independence as a third-party body; it was not involved in the execution of the LCA or in the development of the declaration and has no conflicts of interest regarding this verification.

The company-specific data and upstream and downstream data have been examined as regards plausibility and consistency. The publisher is responsible for ensuring the factual integrity and legal compliance of this declaration.



Program assistant: Xinyuan Zhang



The software used in creation of this LCA and EPD is verified by EPD Hub to conform to the procedural and methodological requirements outlined in ISO 14025:2010, ISO 14040/14044, EN 15804+A2, and EPD Hub Core Product Category Rules and General Program Instructions.

[Verified tools](#)

Tool verifier: Hai Ha Nguyen

Tool verification validity: 28 March 2025 - 27 March 2028

APPENDIX

SCALING LUMINAIRE-FAMILY

This appendix details the scaling factors for the complete luminaire series. These factors are based on the reference product specified in the EPD’s product description. The final GWP results for all products within this series can be calculated using the explicit formulas provided herein. To determine the impacts of the following modules, distinct calculation methods were applied.

MANUFACTURING; TRANSPORT AND END OF LIFE. A1-A3/A4 AND C1-C4:

$$\text{Weight factor} = \frac{\text{Weight}_{\text{input}}}{\text{Weight}_{\text{reference}}}$$

OPERATIONAL ENERGY USE: B6:

$$\text{Power factor} = \left(\frac{\text{Power}_{\text{input}}}{\text{Power}_{\text{reference}}} \right) * \left(\frac{\text{CSF}_{\text{input}}}{\text{CSF}_{\text{reference}}} \right)$$

*CSF: control scaling factor depending on the light control scenario.

Table 1: Light management functions (LMS) and control scaling factors

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0,75
Presence sensing	PS	0,75
Daylight dependency and presence sensing	DD+PS	0,5

The following list includes all articles in the series available at the time this EPD was created.

For each article, the respective scaling factor is provided, calculated according to the preceding formulas. To determine the GWP values for a specific article, please use the corresponding factor and the declared values of the reference product. The **highlighted** article number is the reference product.

*FU: Functional unit

Table 2: Scaling table "Basic Ball" (Glass sphere) series 1/2

Article number	Lumen [lm]	Weight [kg]	Power [W]	LMS coefficient	FU coefficient	A1-A3	A4	B6	C1-C4
312108.002.1.76	9.000	11,07	79	0,5	1,06	1,65	1,65	0,50	1,65
312108.002.76	8.650	11,07	79	0,5	1,02	1,65	1,65	0,50	1,65
312121.002.1.76	9.000	10,7	79	0,5	1,06	1,60	1,60	0,50	1,60
312121.002.76	8.650	10,7	79	0,5	1,02	1,60	1,60	0,50	1,60
312107.002.1.76	9.000	8,13	79	0,5	1,06	1,21	1,21	0,50	1,21
312107.002.76AB	8.400	8,47	79	0,5	0,99	1,26	1,26	0,50	1,26
312107.002.76	8.650	8,13	79	0,5	1,02	1,21	1,21	0,50	1,21
312120.002.1.76	9.000	7,85	79	0,5	1,06	1,17	1,17	0,50	1,17
312120.002.76	8.650	7,85	79	0,5	1,02	1,17	1,17	0,50	1,17
312095.002.1.76	8.850	6,98	79	0,5	1,04	1,04	1,04	0,50	1,04
312095.002.76	8.500	7	79	0,5	1,00	1,04	1,04	0,50	1,04
312119.002.1.76	8.850	6,7	79	0,5	1,04	1,00	1,00	0,50	1,00
312119.002.76	8.500	6,7	79	0,5	1,00	1,00	1,00	0,50	1,00

Table 3: Scaling table "Basic Ball" (Glass sphere) series 2/2

Article number	Lumen [lm]	Weight [kg]	Power [W]	LMS coefficient	FU coefficient	A1-A3	A4	B6	C1-C4
312095.002.76AB	8.250	6,88	79	0,5	0,97	1,03	1,03	0,50	1,03
312119.005.76AA	8.250	6,35	79	0,5	0,97	0,95	0,95	0,50	0,95
312105.002.1.76AA	3.750	5,6	26	0,5	0,44	0,84	0,84	0,16	0,84
312105.009.76AB	3.450	5,55	26	0,5	0,41	0,83	0,83	0,16	0,83
312105.002.76	3.550	5,53	26	0,5	0,42	0,83	0,83	0,16	0,83
312094.002.1.76	6.450	5,54	49	0,5	0,76	0,83	0,83	0,31	0,83
312094.002.76	6.250	5,54	49	0,5	0,74	0,83	0,83	0,31	0,83
312105.002.1.76	3.750	5,53	26	0,5	0,44	0,83	0,83	0,16	0,83
312115.002.76	3.550	5,39	26	0,5	0,42	0,80	0,80	0,16	0,80
312115.002.1.76	3.750	5,39	26	0,5	0,44	0,80	0,80	0,16	0,80
312116.002.1.76	6.450	5,4	49	0,5	0,76	0,81	0,81	0,31	0,81
312116.002.76	6.250	5,4	49	0,5	0,74	0,81	0,81	0,31	0,81