



## ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH EN 15804+A2 & ISO 14025

Copenhagen City Comfort LED large BDS/BRS/BSS 862/962

Signify N.V.



**EPD HUB, HUB-5604**

Published on 05.03.2026, last updated on 05.03.2026, valid until 05.03.2031

## MANUFACTURER AND SITE

Manufacturer	Signify N.V.
Address	High Tech Campus 48, 5656 AE Eindhoven, The Netherlands
Contact details	sustainability@signify.com
Website	https://www.signify.com/global
Place of production	COPENHAGEN, DENMARK
Place(s) of raw material origin	APAC, EU
Place(s) of installation and use	DENMARK
Period for data	Calendar Year 2023

## EPD STANDARDS, SCOPE AND VERIFICATION

Program operator	EPD Hub, hub@epdhub.com
Reference standard	EN 15804:2012+A2:2019/AC:2021 and ISO 14025
PCR	EPD Hub Core PCR version 1.2, 24 Mar 2025
Sector	Electrical product
Category of EPD	Third party verified EPD
Scope of the EPD	Cradle to gate with options, A4-A5, B6, and modules C1-C4, D
EPD author	Signify / Sustainability
EPD verification	Independent verification of this EPD and data, according to ISO 14025: <input type="checkbox"/> Internal verification <input checked="" type="checkbox"/> External verification
EPD verifier	Imane Uald Lamkaddam as an authorized verifier for EPD Hub

## PRODUCT SPECIFICATION

Product name	Copenhagen City Comfort LED large BDS/BRS/BSS 862/962
Product number / reference	822277706697 / BRS862 LED60/830II MDW GR CLO-DDF12 C10K
GTIN (Global Trade Item Number)	Not applicable
NOBB (Norwegian Building Product Database)	Not applicable
A1-A3 Specific data (%)	10

## PRODUCT DESCRIPTION

The original Copenhagen luminaire was co-designed with Copenhagen's Office of City Architecture in the 1960s. This timeless luminaire design comes in three types: Copenhagen LED gen2, which delivers high performance for road lighting applications; Copenhagen City LED gen2, which is for city and residential areas where balanced light comfort and cohesive design language are appreciated; Copenhagen City Comfort LED, which caters to the needs of sensitive inner-city areas with high demand for spill light control and high comfort. The architecture limits the direct view into the light source for residents, this way minimizing obtrusive lighting. The Copenhagen City Comfort LED version (BRS862) is ideal for inner-city and residential environments where very high lighting comfort is needed. The Copenhagen City Xtra Comfort LED version (BRS962) takes it a step further, providing even more spill light control in extra sensitive areas. This means that residents in these areas can enjoy the benefits of functional lighting without being bothered by excessive light pollution. In order to reduce the carbon footprint of the luminaires, the iconic canopy is made of bio-based plastic and main metal parts manufactured from recycled aluminium. The luminaire is available with one or two Zhaga-D4i (ZD4i) system-ready sockets, which makes the luminaire future-ready, ready to pair with advanced control and lighting software applications such as Interact. Due to the plastic material usage, the top socket can be integrated into the canopy without impacting the clean design of the luminaire. Overall,

This EPD is intended for business-to-business and/or business-to-consumer communication. Life Cycle Assessment study has been performed in accordance with the requirements of EN 15804, EPD Hub PCR version 1.2 (24 Mar 2025) and JRC characterization factors EF 3.1. The manufacturer has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804 and if they are not compared in a building context.

Copenhagen City Comfort LED and Xtra Comfort LED options contribute to a more livable city.

### PRODUCT CLASSIFICATION

Declared operating voltage, Volt	220-240
Light source colour temperature, Kelvin	3000
Protection index for water and dust (IP)	66
Impact resistance index (IK)	7
Luminous flux, Lumens	4872
Electrical power, Watt	44
Luminous efficiency, Lm/W	111
Additional characteristic	Not applicable

### ABOUT THE MANUFACTURER

Signify is the world leader in lighting for professionals, consumers and lighting for the Internet of Things. Our energy efficient lighting products, systems and services enable our customers to enjoy a superior quality of light, and make people's lives safer and more comfortable, businesses more productive and cities more liveable.

For more information, please visit: <https://www.signify.com/global>

### PRODUCT RAW MATERIAL MAIN COMPOSITION

Raw material category	Amount, mass- %	Material origin
Metals	32.09	APAC , EU
Minerals	20.18	EU
Fossil materials	24.3	APAC , EU
Bio-based materials	23.43	EU

### BIOGENIC CARBON CONTENT

Product's biogenic carbon content at the factory gate

Biogenic carbon content in product, kg C	1.638
Biogenic carbon content in packaging, kg C	0.499

### ENVIRONMENTAL DATA SUMMARY

Declared unit	1 unit
Declared unit mass, kg	7.512
Mass of packaging, kg	1.26
Functional unit (from PEP PSR0014)	Provide lighting that delivers an outgoing artificial luminous flux of 1000 lumens during a reference lifetime of 35000 hours
Reference service life (years)	25
Assigned lifetime (hours)	100000
GWP-total, A1-A3 (kg CO <sub>2</sub> e)	44.9
GWP-fossil, A1-A3 (kg CO <sub>2</sub> e)	53.7
Secondary material, inputs (%)	18.1
Secondary material, outputs (%)	34.7
Total energy use, A1-A3 (kWh)	204
Net freshwater use, A1-A3 (m <sup>3</sup> )	6.10E-01

# LIFE CYCLE ASSESSMENT

## SYSTEM BOUNDARY

This EPD covers the life-cycle modules listed in the following table.

Product stage			Installation stage		Use stage							End of life stage				Beyond the system
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	X	X	ND	ND	ND	ND	ND	X	ND	X	X	X	X	X
Raw materials	Transport	Manufacturing	Transport	Installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstr./demo.	Transport	Waste processing	Disposal	Reuse, Recovery, Recycling

Modules not declared = ND.

## CUT - OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the reference standard and the applied PCR. The study does not exclude any hazardous materials or substances. There is no neglected unit process more than 1% of total mass or energy flows. The module-specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

The production of capital equipment, construction activities, and infrastructure, maintenance and operation of capital equipment, personnel-related activities, energy and water use related to company management and sales activities are excluded.

## VALIDATION OF DATA

Data collection for production, transport, and packaging was conducted using time and site-specific information, as defined in the general information section on page 1 and 2. Upstream process calculations rely on generic data as defined in the Bibliography section. Manufacturer-provided specific and generic data were used for the product’s manufacturing stage. The analysis was performed in One Click LCA EPD Generator, with the 'Cut-Off, EN 15804+A2' allocation method, and characterization factors according to EN 15804:2012+A2:2019/AC:2021 and JRC EF 3.1.

## ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation. All allocations are done as per the reference standards and the applied PCR. In this study, ancillary materials, energy & water consumption, material loss and waste generation at the manufacturing site are attributed to the bill of materials of the products, therefore, they are allocated by partitioning the quantities on the base of the total production in kg throughout the year. Thus, allocation has been done in the following ways:

Data type	Allocation
Raw materials	No allocation
Packaging materials	No allocation
Ancillary materials	Allocated by mass
Manufacturing energy and waste	Allocated by mass

Proxy data is used for certain materials due to their unavailability in the database. Conservative choices have been adopted when exact information was missing. Regarding module C1-C4: EOL scenarios are based on default values from EN 50693. For stages description please refer to section Product life cycle in this EPD report.

### LCA SOFTWARE AND BIBLIOGRAPHY

This EPD has been created using One Click LCA Luminaire EPD Generator v2.2.7. The LCA and EPD have been prepared according to the reference standards, EN 50693, and ISO 14040/14044. Ecoinvent v 3.10.1 and One Click LCA databases were used as sources of environmental data. Allocation used in Ecoinvent 3.10.1 environmental data sources follow the methodology 'allocation, cut-off, EN 15804+A2'.

No other sources were used in the modelling of this EPD.

### PRODUCT & MANUFACTURING SITES GROUPING

---

Type of grouping	No grouping
Grouping method	Not applicable
Variation in GWP-fossil for A1-A3, %	-

---

### SUBSTANCES, REACH - VERY HIGH CONCERN

The product does not contain any REACH SVHC substances in amounts greater than 0,1 % (1000 ppm).

## PRODUCT LIFE CYCLE

### MANUFACTURING AND PACKAGING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production. The material losses occurring during the manufacturing processes are treated as per the waste handling practices in the factory, while scenario assumptions are made in the absence of exact data. The study also considers the fuels used by machines as well as losses during electricity transmission.

The product is made of metals, plastics, and electronic components. All components are transported to the production facility, where the main manufacturing processes primarily are associated with assembly. A2 transport distances are calculated always taking the capital city of component country of origin as a starting point and exact manufacturing location as destination. The finished product can be packaged with polyethylene, cardboard, and/or paper as packaging material before shipment to customers. Manufacturing loss, ancillaries and wastes are calculated according to the data that each manufacturing site is sharing with Signify. The total annual amount of waste in kg is allocated to the total annual production in kg at the specific manufacturing site responsible to produce the studied product. Thus, it is possible to allocate it according to the weight of the product analysed in this study.

Co-product allocation is neglected as revenue of co-product is very low, hence, the waste undergoes a conservative waste treatment.

The use of renewable energy in manufacturing is demonstrated through contractual instruments (GOs, RECs, etc), and its use is ensured throughout the validity period of this EPD.

### TRANSPORT AND INSTALLATION (A4-A5)

A4 transport distances are calculated always taking the exact manufacturing location to customer location. If the customer's location is defined as a country or its capital city, the calculation is made to the respective capital city. If the

customer's location is specified as a region, the distance is calculated to the capital city of the best-performing sales country within that region. The transportation method is a combination of lorry and container ship where needed. To be conservative, empty returns are included in this study as implemented through an average load factor in the Ecoinvent transport datapoints. Environmental impacts from installation include waste packaging materials (A5). The packaging waste treatment is assumed to be conservative with incineration without energy recovery. The impacts of energy consumption and the used ancillary materials during installation are considered negligible.

### PRODUCT USE AND MAINTENANCE (B1-B7)


During the use phase, the product consumes electricity (B6), which is calculated multiplying the Wattage x Assigned lifetime (hours) x Country energy mix factor. To know which Country energy mix was used in this EPD, please refer to Annex 2.

The Reference service life in years is calculated according to the main application type of the product, based on annual operating hours. Impacts due to electricity production include direct emissions to air, transformation, and transmission losses.

### PRODUCT END OF LIFE (C1-C4, D)

Consumption of energy and natural resources in demolition process is assumed to be negligible. It is assumed that the waste is collected separately and transported to the waste treatment centre. The transport distance is 150 km while the transportation method is assumed to be lorry (C2). According to EN 50693:2019, the sequence of treatment operations occurring to the product shall include de-pollution, fractions separation and preparation (dismantling, crushing, shredding, sorting), recycling, other material recovery, energy recovery and disposal. In this study, the default values from table G.4 of EN 50693 is used for treating materials in different waste treatment methods. Due to the material and energy recovery potential of parts in the lighting system, the end-of-life product is converted into recycled raw materials, while the energy recovered from incineration displaces electricity and heat production (D). The benefits and loads of incineration and recycling are included in Module D.

# LIFE CYCLE FLOW DIAGRAM - SYSTEM BOUNDARY

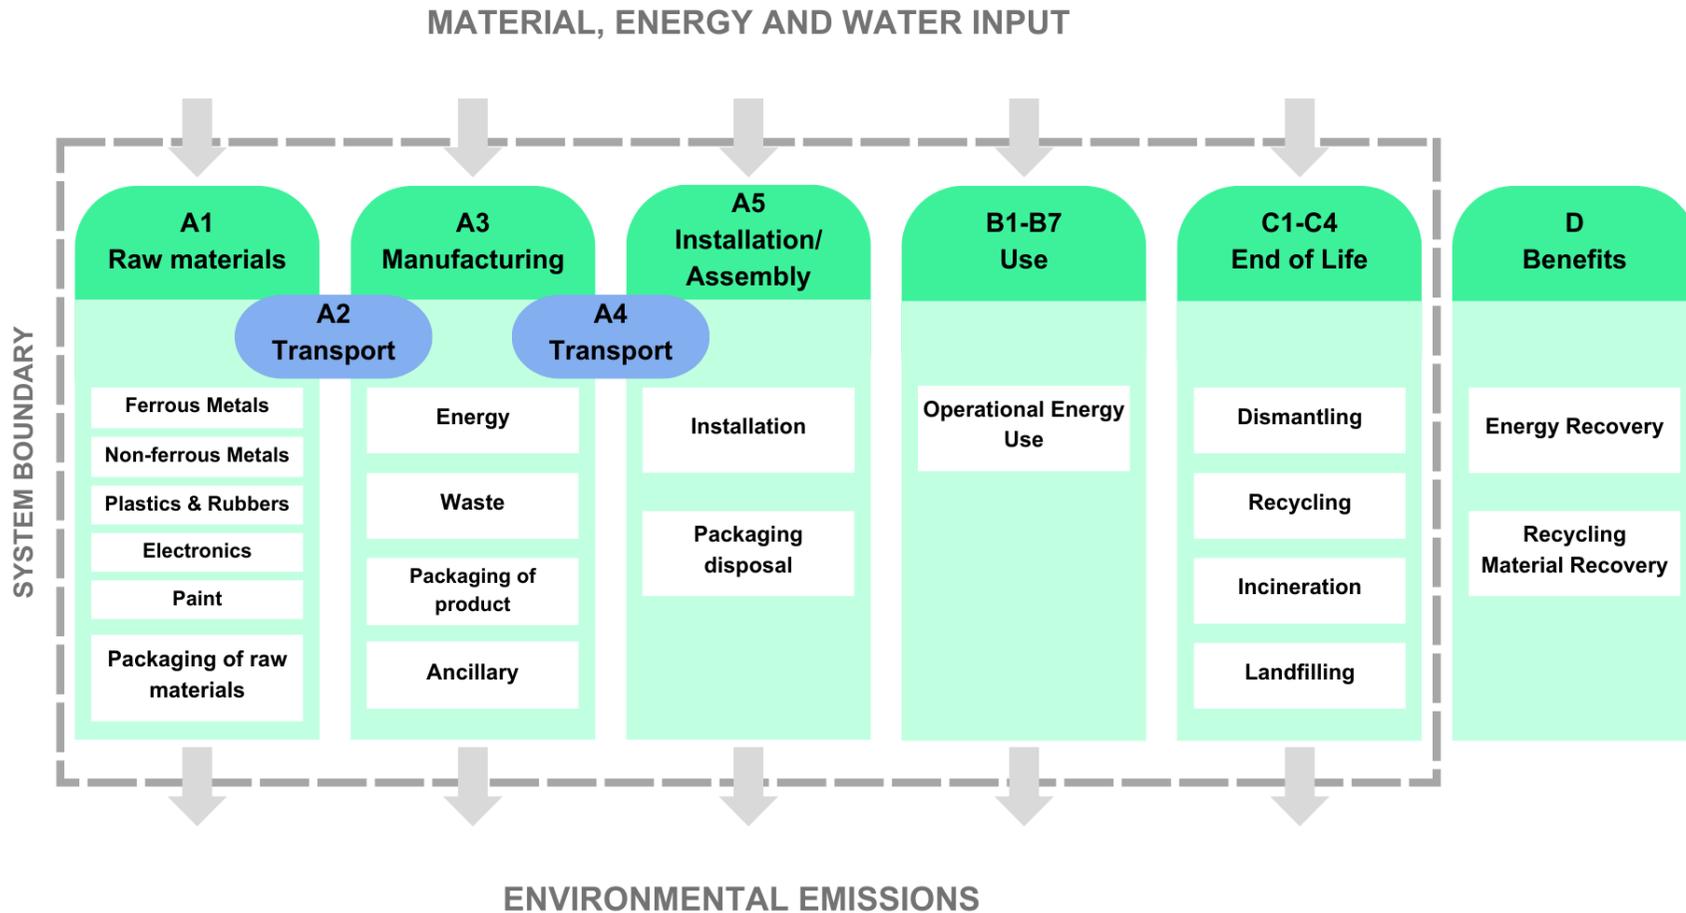

# ENVIRONMENTAL IMPACT DATA, RESULTS PER DECLARED UNIT

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding threshold values, safety margins or risks.

## CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total <sup>1)</sup>	kg CO <sub>2</sub> e	4.33E+01	3.75E-01	1.19E+00	4.49E+01	7.09E-02	1.90E+00	ND	ND	ND	ND	ND	4.50E+02	ND	0.00E+00	2.21E-01	3.82E+00	2.07E+00	-7.81E+00
GWP – fossil	kg CO <sub>2</sub> e	5.08E+01	3.75E-01	2.57E+00	5.37E+01	7.08E-02	7.89E-02	ND	ND	ND	ND	ND	4.46E+02	ND	0.00E+00	2.21E-01	3.82E+00	2.07E+00	-7.79E+00
GWP – biogenic	kg CO <sub>2</sub> e	-8.70E+00	7.09E-05	-1.43E+00	-1.01E+01	1.60E-05	1.82E+00	ND	ND	ND	ND	ND	1.91E+00	ND	0.00E+00	4.83E-05	-2.42E-04	-2.27E-04	-1.11E-02
GWP – LULUC	kg CO <sub>2</sub> e	1.24E+00	1.86E-04	4.17E-02	1.29E+00	3.17E-05	2.91E-05	ND	ND	ND	ND	ND	1.91E+00	ND	0.00E+00	9.79E-05	1.71E-04	6.96E-05	-1.30E-02
Ozone depletion pot.	kg CFC-11e	9.02E-07	5.45E-09	1.08E-07	1.02E-06	1.05E-09	1.09E-09	ND	ND	ND	ND	ND	9.55E-06	ND	0.00E+00	3.09E-09	2.22E-09	1.58E-09	-4.78E-08
Acidification potential	mol H <sup>+</sup> e	6.08E-01	6.45E-03	1.02E-02	6.25E-01	2.41E-04	4.69E-04	ND	ND	ND	ND	ND	2.68E+00	ND	0.00E+00	7.37E-04	1.58E-03	7.02E-04	-1.87E-01
EP-freshwater <sup>2)</sup>	kg Pe	3.08E-02	1.99E-05	8.91E-04	3.17E-02	5.51E-06	7.93E-06	ND	ND	ND	ND	ND	3.28E-01	ND	0.00E+00	1.72E-05	5.56E-05	1.17E-05	-1.09E-02
EP-marine	kg Ne	1.23E-01	1.65E-03	4.64E-03	1.29E-01	7.93E-05	2.19E-04	ND	ND	ND	ND	ND	4.82E-01	ND	0.00E+00	2.39E-04	6.42E-04	2.44E-03	-1.21E-02
EP-terrestrial	mol Ne	1.04E+00	1.83E-02	2.89E-02	1.08E+00	8.63E-04	2.00E-03	ND	ND	ND	ND	ND	5.80E+00	ND	0.00E+00	2.60E-03	5.88E-03	3.20E-03	-1.48E-01
POCP (“smog”) <sup>3)</sup>	kg NMVOCe	2.66E-01	5.26E-03	9.50E-03	2.81E-01	3.56E-04	5.68E-04	ND	ND	ND	ND	ND	1.45E+00	ND	0.00E+00	1.03E-03	1.55E-03	9.14E-04	-4.40E-02
ADP-minerals & metals <sup>4)</sup>	kg Sbe	4.87E-03	6.84E-07	1.59E-05	4.89E-03	1.98E-07	2.35E-07	ND	ND	ND	ND	ND	1.41E-02	ND	0.00E+00	7.26E-07	3.29E-06	2.44E-07	-2.43E-03
ADP-fossil resources	MJ	6.50E+02	4.99E+00	3.63E+01	6.91E+02	1.03E+00	8.16E-01	ND	ND	ND	ND	ND	7.18E+03	ND	0.00E+00	3.10E+00	1.83E+00	1.15E+00	-9.36E+01
Water use <sup>5)</sup>	m <sup>3</sup> e depr.	2.57E+01	1.94E-02	9.98E-01	2.67E+01	5.08E-03	9.45E-02	ND	ND	ND	ND	ND	8.06E+02	ND	0.00E+00	1.44E-02	2.64E-01	1.31E-01	-2.26E+00

1) GWP = Global Warming Potential. 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO4e. 3) POCP = Photochemical ozone formation. 4) ADP = Abiotic depletion potential. 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

### ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Particulate matter	Incidence	4.18E-06	2.35E-08	1.76E-07	4.38E-06	7.09E-09	5.85E-09	ND	ND	ND	ND	ND	1.76E-05	ND	0.00E+00	1.75E-08	1.37E-08	8.50E-09	-6.74E-07
Ionizing radiation <sup>6)</sup>	kBq U235e	3.38E+00	3.32E-03	1.08E-01	3.49E+00	8.95E-04	9.89E-04	ND	ND	ND	ND	ND	1.59E+02	ND	0.00E+00	2.51E-03	8.04E-03	1.56E-03	-8.50E-01
Ecotoxicity (freshwater)	CTUe	9.72E+02	5.40E-01	1.15E+01	9.84E+02	1.45E-01	2.26E+00	ND	ND	ND	ND	ND	2.51E+03	ND	0.00E+00	4.91E-01	7.83E+00	5.10E+01	-1.47E+02
Human toxicity, cancer	CTUh	5.12E-08	7.12E-11	1.14E-09	5.24E-08	1.17E-11	1.09E-10	ND	ND	ND	ND	ND	2.80E-07	ND	0.00E+00	3.76E-11	3.69E-10	3.34E-10	-2.16E-08
Human tox. non-cancer	CTUh	2.68E-06	2.24E-09	3.34E-08	2.72E-06	6.65E-10	4.44E-09	ND	ND	ND	ND	ND	1.49E-05	ND	0.00E+00	1.94E-09	1.47E-08	1.13E-08	-2.19E-06
SQP <sup>7)</sup>	-	6.90E+02	2.76E+00	1.30E+02	8.24E+02	1.03E+00	4.00E-01	ND	ND	ND	ND	ND	1.25E+04	ND	0.00E+00	1.85E+00	1.49E+00	1.52E+00	-7.13E+01

### USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER as energy <sup>8)</sup>	MJ	7.18E+01	5.36E-02	8.44E+00	8.03E+01	1.41E-02	-2.24E+01	ND	ND	ND	ND	ND	1.11E+04	ND	0.00E+00	4.25E-02	1.82E-01	2.98E-02	-1.40E+01
Renew. PER as material	MJ	3.80E+00	0.00E+00	1.23E+01	1.61E+01	0.00E+00	-1.61E+01	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	-3.69E-03	-6.85E-03	0.00E+00
Total use of renew. PER	MJ	7.56E+01	5.36E-02	2.07E+01	9.63E+01	1.41E-02	-3.84E+01	ND	ND	ND	ND	ND	1.11E+04	ND	0.00E+00	4.25E-02	1.78E-01	2.29E-02	-1.40E+01
Non-re. PER as energy	MJ	6.14E+02	4.99E+00	3.61E+01	6.55E+02	1.03E+00	8.16E-01	ND	ND	ND	ND	ND	7.18E+03	ND	0.00E+00	3.10E+00	-5.52E+01	-6.43E+01	-9.36E+01
Non-re. PER as material	MJ	4.93E+01	0.00E+00	-4.44E-01	4.88E+01	0.00E+00	-1.30E-01	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	-2.43E+01	-2.44E+01	0.00E+00
Total use of non-re. PER	MJ	6.64E+02	4.99E+00	3.56E+01	7.04E+02	1.03E+00	6.86E-01	ND	ND	ND	ND	ND	7.18E+03	ND	0.00E+00	3.10E+00	-7.96E+01	-8.87E+01	-9.36E+01
Secondary materials	kg	1.36E+00	0.00E+00	0.00E+00	1.36E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Renew. secondary fuels	MJ	6.65E-02	1.63E-05	1.38E-01	2.05E-01	5.56E-06	1.02E-05	ND	ND	ND	ND	ND	2.77E-02	ND	0.00E+00	1.77E-05	7.02E-05	2.11E-05	-1.29E-03
Non-ren. secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use of net fresh water	m <sup>3</sup>	5.87E-01	5.43E-04	2.24E-02	6.10E-01	1.52E-04	1.53E-03	ND	ND	ND	ND	ND	2.63E+01	ND	0.00E+00	4.11E-04	4.29E-03	-3.42E-03	-9.56E-02

8) PER = Primary energy resources.

### END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg	7.00E+00	7.55E-03	1.39E-01	7.15E+00	1.74E-03	2.48E-02	ND	ND	ND	ND	ND	4.38E+01	ND	0.00E+00	5.41E-03	7.21E-02	1.66E-01	-1.29E+00
Non-hazardous waste	kg	2.01E+02	1.23E-01	1.04E+01	2.12E+02	3.22E-02	1.35E+00	ND	ND	ND	ND	ND	1.60E+03	ND	0.00E+00	1.01E-01	2.52E+00	1.03E+01	-6.42E+01
Radioactive waste	kg	8.57E-04	8.11E-07	2.57E-05	8.83E-04	2.19E-07	2.48E-07	ND	ND	ND	ND	ND	3.63E-02	ND	0.00E+00	6.15E-07	1.98E-06	3.89E-07	-2.10E-04

### END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for reuse	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	kg	0.00E+00	0.00E+00	6.41E-02	6.41E-02	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	2.61E+00	0.00E+00	0.00E+00
Materials for energy rec	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Exported energy	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	1.79E+01	0.00E+00	0.00E+00
Exported energy – Electricity	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	7.54E+00	0.00E+00	0.00E+00
Exported energy – Heat	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	1.04E+01	0.00E+00	0.00E+00

### ENVIRONMENTAL IMPACTS – EN 15804+A1, CML

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Pot.	kg CO <sub>2</sub> e	5.03E+01	3.73E-01	2.75E+00	5.34E+01	7.04E-02	7.83E-02	ND	ND	ND	ND	ND	4.47E+02	ND	0.00E+00	2.20E-01	3.82E+00	2.07E+00	-7.76E+00
Ozone depletion Pot.	kg CFC-11e	6.10E-07	4.34E-09	1.01E-07	7.16E-07	8.34E-10	9.23E-10	ND	ND	ND	ND	ND	8.75E-06	ND	0.00E+00	2.47E-09	1.93E-09	1.33E-09	-4.05E-08
Acidification	kg SO <sub>2</sub> e	4.29E-01	5.13E-03	7.15E-03	4.41E-01	1.84E-04	3.45E-04	ND	ND	ND	ND	ND	2.15E+00	ND	0.00E+00	5.64E-04	1.19E-03	5.06E-04	-1.64E-01
Eutrophication	kg PO <sub>4</sub> <sup>3</sup> e	1.05E-01	6.24E-04	4.77E-03	1.11E-01	4.49E-05	1.07E-04	ND	ND	ND	ND	ND	3.88E-01	ND	0.00E+00	1.37E-04	3.02E-04	2.78E-04	-8.29E-03
POCP (“smog”)	kg C <sub>2</sub> H <sub>4</sub> e	3.10E-02	2.72E-04	7.92E-04	3.21E-02	1.64E-05	2.63E-05	ND	ND	ND	ND	ND	1.39E-01	ND	0.00E+00	5.06E-05	7.44E-05	5.13E-05	-7.25E-03
ADP-elements	kg Sbe	4.86E-03	6.70E-07	1.57E-05	4.87E-03	1.93E-07	1.96E-07	ND	ND	ND	ND	ND	1.40E-02	ND	0.00E+00	7.09E-07	3.20E-06	1.98E-07	-2.42E-03
ADP-fossil	MJ	5.94E+02	4.93E+00	3.46E+01	6.34E+02	1.01E+00	8.01E-01	ND	ND	ND	ND	ND	4.88E+03	ND	0.00E+00	3.06E+00	1.70E+00	1.12E+00	-8.02E+01

### ADDITIONAL INDICATOR – GWP-GHG

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-GHG 9)	kg CO <sub>2</sub> e	5.20E+01	3.75E-01	2.61E+00	5.50E+01	7.08E-02	7.90E-02	ND	ND	ND	ND	ND	4.48E+02	ND	0.00E+00	2.21E-01	3.82E+00	2.07E+00	-7.80E+00

9) This indicator includes all greenhouse gases excluding biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. In addition, the characterisation factors for the flows - CH<sub>4</sub> fossil, CH<sub>4</sub> biogenic and Dinitrogen monoxide - were updated. This indicator is identical to the GWP-total of EN 15804:2012+A2:2019 except that the characterization factor for biogenic CO<sub>2</sub> is set to zero.

# ENVIRONMENTAL IMPACT DATA, RESULTS PER FUNCTIONAL UNIT

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding threshold values, safety margins or risks.

## CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total <sup>1)</sup>	kg CO <sub>2</sub> éq/FU	3.11E+00	2.69E-02	8.54E-02	3.22E+00	5.09E-03	1.37E-01	ND	ND	ND	ND	ND	3.23E+01	ND	0.00E+00	1.59E-02	2.75E-01	1.49E-01	-5.61E-01
GWP – fossil	kg CO <sub>2</sub> éq/FU	3.65E+00	2.69E-02	1.85E-01	3.86E+00	5.09E-03	5.67E-03	ND	ND	ND	ND	ND	3.21E+01	ND	0.00E+00	1.59E-02	2.75E-01	1.49E-01	-5.60E-01
GWP – biogenic	kg CO <sub>2</sub> éq/FU	-6.25E-01	5.09E-06	-1.02E-01	-7.27E-01	1.15E-06	1.31E-01	ND	ND	ND	ND	ND	1.37E-01	ND	0.00E+00	3.47E-06	-1.74E-05	-1.63E-05	-8.01E-04
GWP – LULUC	kg CO <sub>2</sub> éq/FU	8.93E-02	1.34E-05	2.99E-03	9.23E-02	2.28E-06	2.09E-06	ND	ND	ND	ND	ND	1.37E-01	ND	0.00E+00	7.03E-06	1.23E-05	5.00E-06	-9.35E-04
Ozone depletion pot.	kg CFC <sub>11</sub> e/FU	6.48E-08	3.92E-10	7.73E-09	7.29E-08	7.51E-11	7.80E-11	ND	ND	ND	ND	ND	6.86E-07	ND	0.00E+00	2.22E-10	1.60E-10	1.13E-10	-3.43E-09
Acidification potential	mole H <sup>+</sup> e/FU	4.37E-02	4.63E-04	7.36E-04	4.49E-02	1.73E-05	3.37E-05	ND	ND	ND	ND	ND	1.93E-01	ND	0.00E+00	5.29E-05	1.13E-04	5.04E-05	-1.35E-02
EP-freshwater <sup>2)</sup>	kg Pe/FU	2.21E-03	1.43E-06	6.40E-05	2.28E-03	3.96E-07	5.70E-07	ND	ND	ND	ND	ND	2.35E-02	ND	0.00E+00	1.24E-06	3.99E-06	8.39E-07	-7.81E-04
EP-marine	kg Ne/FU	8.84E-03	1.19E-04	3.33E-04	9.29E-03	5.70E-06	1.57E-05	ND	ND	ND	ND	ND	3.46E-02	ND	0.00E+00	1.72E-05	4.61E-05	1.75E-04	-8.70E-04
EP-terrestrial	mol Ne/FU	7.45E-02	1.32E-03	2.08E-03	7.79E-02	6.20E-05	1.43E-04	ND	ND	ND	ND	ND	4.17E-01	ND	0.00E+00	1.87E-04	4.22E-04	2.30E-04	-1.06E-02
POCP (“smog”) <sup>3)</sup>	kg NMVOCe/	1.91E-02	3.78E-04	6.82E-04	2.02E-02	2.56E-05	4.08E-05	ND	ND	ND	ND	ND	1.04E-01	ND	0.00E+00	7.37E-05	1.12E-04	6.57E-05	-3.16E-03
ADP-minerals & metals <sup>4)</sup>	kg Sbe/FU	3.50E-04	4.91E-08	1.14E-06	3.51E-04	1.42E-08	1.69E-08	ND	ND	ND	ND	ND	1.01E-03	ND	0.00E+00	5.22E-08	2.36E-07	1.75E-08	-1.74E-04
ADP-fossil resources	MJ/FU	4.67E+01	3.58E-01	2.61E+00	4.97E+01	7.38E-02	5.87E-02	ND	ND	ND	ND	ND	5.15E+02	ND	0.00E+00	2.23E-01	1.31E-01	8.24E-02	-6.73E+00
Water use <sup>5)</sup>	m <sup>3</sup> e priv./FU	1.84E+00	1.39E-03	7.17E-02	1.92E+00	3.65E-04	6.79E-03	ND	ND	ND	ND	ND	5.79E+01	ND	0.00E+00	1.03E-03	1.90E-02	9.40E-03	-1.63E-01

1) GWP = Global Warming Potential. 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO4e. 3) POCP = Photochemical ozone formation. 4) ADP = Abiotic depletion potential. 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

**ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1**

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Particulate matter	Incidence /FU	3.00E-07	1.69E-09	1.26E-08	3.14E-07	5.09E-10	4.20E-10	ND	ND	ND	ND	ND	1.26E-06	ND	0.00E+00	1.26E-09	9.86E-10	6.10E-10	-4.84E-08
Ionizing radiation <sup>6)</sup>	kBq U235e/FU	2.43E-01	2.38E-04	7.76E-03	2.51E-01	6.43E-05	7.11E-05	ND	ND	ND	ND	ND	1.14E+01	ND	0.00E+00	1.80E-04	5.78E-04	1.12E-04	-6.10E-02
Ecotoxicity (freshwater)	CTUe/FU	6.98E+01	3.88E-02	8.23E-01	7.07E+01	1.04E-02	1.62E-01	ND	ND	ND	ND	ND	1.80E+02	ND	0.00E+00	3.52E-02	5.62E-01	3.67E+00	-1.06E+01
Human toxicity, cancer	CTUh/FU	3.68E-09	5.12E-12	8.21E-11	3.76E-09	8.40E-13	7.82E-12	ND	ND	ND	ND	ND	2.01E-08	ND	0.00E+00	2.70E-12	2.65E-11	2.40E-11	-1.55E-09
Human tox. non-cancer	CTUh/FU	1.93E-07	1.61E-10	2.40E-09	1.95E-07	4.78E-11	3.19E-10	ND	ND	ND	ND	ND	1.07E-06	ND	0.00E+00	1.39E-10	1.05E-09	8.15E-10	-1.57E-07
SQP <sup>7)</sup>	-/FU	4.96E+01	1.98E-01	9.37E+00	5.92E+01	7.43E-02	2.87E-02	ND	ND	ND	ND	ND	8.99E+02	ND	0.00E+00	1.33E-01	1.07E-01	1.09E-01	-5.12E+00

**USE OF NATURAL RESOURCES**

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER as energy <sup>8)</sup>	MJ/FU	5.16E+00	3.85E-03	6.06E-01	5.77E+00	1.01E-03	-1.61E+00	ND	ND	ND	ND	ND	7.96E+02	ND	0.00E+00	3.06E-03	1.31E-02	2.14E-03	-1.01E+00
Renew. PER as material	MJ/FU	2.73E-01	0.00E+00	8.83E-01	1.16E+00	0.00E+00	-1.15E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	-2.65E-04	-4.92E-04	0.00E+00
Total use of renew. PER	MJ/FU	5.43E+00	3.85E-03	1.49E+00	6.92E+00	1.01E-03	-2.76E+00	ND	ND	ND	ND	ND	7.96E+02	ND	0.00E+00	3.06E-03	1.28E-02	1.65E-03	-1.01E+00
Non-re. PER as energy	MJ/FU	4.41E+01	3.58E-01	2.59E+00	4.71E+01	7.38E-02	5.87E-02	ND	ND	ND	ND	ND	5.16E+02	ND	0.00E+00	2.23E-01	-3.97E+00	-4.62E+00	-6.73E+00
Non-re. PER as material	MJ/FU	3.54E+00	0.00E+00	-3.19E-02	3.51E+00	0.00E+00	-9.37E-03	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	-1.75E+00	-1.75E+00	0.00E+00
Total use of non-re. PER	MJ/FU	4.77E+01	3.58E-01	2.56E+00	5.06E+01	7.38E-02	4.93E-02	ND	ND	ND	ND	ND	5.16E+02	ND	0.00E+00	2.23E-01	-5.71E+00	-6.38E+00	-6.73E+00
Secondary materials	kg/FU	9.77E-02	0.00E+00	0.00E+00	9.77E-02	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Renew. secondary fuels	MJ/FU	4.78E-03	1.17E-06	9.94E-03	1.47E-02	3.99E-07	7.30E-07	ND	ND	ND	ND	ND	1.99E-03	ND	0.00E+00	1.27E-06	5.04E-06	1.52E-06	-9.29E-05
Non-ren. secondary fuels	MJ/FU	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use of net fresh water	m <sup>3</sup> /FU	4.22E-02	3.90E-05	1.61E-03	4.38E-02	1.09E-05	1.10E-04	ND	ND	ND	ND	ND	1.89E+00	ND	0.00E+00	2.95E-05	3.08E-04	-2.45E-04	-6.87E-03

8) PER = Primary energy resources.

**END OF LIFE – WASTE**

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg/FU	5.03E-01	5.42E-04	1.00E-02	5.14E-01	1.25E-04	1.79E-03	ND	ND	ND	ND	ND	3.15E+00	ND	0.00E+00	3.88E-04	5.18E-03	1.19E-02	-9.26E-02
Non-hazardous waste	kg/FU	1.45E+01	8.87E-03	7.48E-01	1.52E+01	2.31E-03	9.67E-02	ND	ND	ND	ND	ND	1.15E+02	ND	0.00E+00	7.28E-03	1.81E-01	7.42E-01	-4.61E+00
Radioactive waste	kg/FU	6.15E-05	5.82E-08	1.85E-06	6.34E-05	1.57E-08	1.78E-08	ND	ND	ND	ND	ND	2.61E-03	ND	0.00E+00	4.42E-08	1.42E-07	2.80E-08	-1.51E-05

### END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for reuse	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	kg	0.00E+00	0.00E+00	4.61E-03	4.61E-03	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	1.87E-01	0.00E+00	0.00E+00
Materials for energy rec	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Exported energy	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	1.29E+00	0.00E+00	0.00E+00
Exported energy – Electricity	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	5.41E-01	0.00E+00	0.00E+00
Exported energy – Heat	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	7.44E-01	0.00E+00	0.00E+00

### ENVIRONMENTAL IMPACTS – EN 15804+A1, CML

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Pot.	kg CO <sub>2</sub> eq./FU	3.61E+00	2.68E-02	1.97E-01	3.84E+00	5.06E-03	5.63E-03	ND	ND	ND	ND	ND	3.21E+01	ND	0.00E+00	1.58E-02	2.75E-01	1.49E-01	-5.58E-01
Ozone depletion Pot.	kg CFC <sub>11</sub> e/FU	4.38E-08	3.12E-10	7.26E-09	5.14E-08	5.99E-11	6.63E-11	ND	ND	ND	ND	ND	6.29E-07	ND	0.00E+00	1.77E-10	1.39E-10	9.52E-11	-2.91E-09
Acidification	kg SO <sub>2</sub> e/FU	3.08E-02	3.68E-04	5.14E-04	3.17E-02	1.32E-05	2.48E-05	ND	ND	ND	ND	ND	1.55E-01	ND	0.00E+00	4.05E-05	8.54E-05	3.63E-05	-1.18E-02
Eutrophication	kg PO <sub>4</sub> <sup>3</sup> e/FU	7.57E-03	4.49E-05	3.43E-04	7.96E-03	3.23E-06	7.69E-06	ND	ND	ND	ND	ND	2.79E-02	ND	0.00E+00	9.86E-06	2.17E-05	2.00E-05	-5.96E-04
POCP (“smog”)	kg C <sub>2</sub> H <sub>4</sub> e/FU	2.23E-03	1.96E-05	5.69E-05	2.31E-03	1.18E-06	1.89E-06	ND	ND	ND	ND	ND	9.97E-03	ND	0.00E+00	3.63E-06	5.34E-06	3.69E-06	-5.21E-04
ADP-elements	kg Sbe/FU	3.49E-04	4.81E-08	1.13E-06	3.50E-04	1.38E-08	1.41E-08	ND	ND	ND	ND	ND	1.01E-03	ND	0.00E+00	5.09E-08	2.30E-07	1.42E-08	-1.74E-04
ADP-fossil	MJ/FU	4.27E+01	3.55E-01	2.48E+00	4.55E+01	7.28E-02	5.75E-02	ND	ND	ND	ND	ND	3.51E+02	ND	0.00E+00	2.20E-01	1.22E-01	8.06E-02	-5.76E+00

### ADDITIONAL INDICATOR – GWP-GHG

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-GHG <sup>9)</sup>	kg CO <sub>2</sub> e/FU	3.74E+00	2.69E-02	1.88E-01	3.95E+00	5.09E-03	5.67E-03	ND	ND	ND	ND	ND	3.22E+01	ND	0.00E+00	1.59E-02	2.75E-01	1.49E-01	-5.61E-01

9) This indicator includes all greenhouse gases excluding biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. In addition, the characterisation factors for the flows - CH<sub>4</sub> fossil, CH<sub>4</sub> biogenic and Dinitrogen monoxide - were updated. This indicator is identical to the GWP-total of EN 15804:2012+A2:2019 except that the characterization factor for biogenic CO<sub>2</sub> is set to zero.

## SCENARIO DOCUMENTATION

### DATA SOURCES

#### Manufacturing energy scenario documentation – A3 (Energy data source)

1. Energy supply, electricity production, co-generation oil and gas, Heat and power co-generation, natural gas, combined cycle power plant, 400MW electrical, Denmark,ecoinvent 3.10.1, 0.0267 kgCO<sub>2</sub>e/MJ
2. Energy supply, electricity production, solar photovoltaic, Electricity production, photovoltaic, 570kWp open ground installation, multi-Si, World, ecoinvent 3.10.1, 0.0829 kgCO<sub>2</sub>e/kWh

#### Transport scenario documentation - A4

1. Transport, freight, lorry >32 metric ton, EURO5, 75.0 km
2. Transport, freight, sea, container ship, 0.0 km

#### Installation scenario documentation - A5 (Waste materials data source)

1. Market for corrugated board box, 1.26 kg

#### Use stages scenario documentation - B6-B7 (Energy data source)

1. Energy supply, electricity transformation and distribution, distribution low voltage, Market for electricity, low voltage, Denmark, 2882.0 kWh

## TRANSPORT SCENARIO DOCUMENTATION - A4

Scenario parameter	Value
Capacity utilization (including empty return) %	50 %
Bulk density of transported products / kg/m <sup>3</sup>	9.52E+01
Volume capacity utilization factor (factor: =1 or <1 or ≥1 for compressed or nested packaged products)	1

## INSTALLATION SCENARIO DOCUMENTATION - A5

Scenario parameter	Value
Ancillary materials for installation (specified by material) / kg or other units as appropriate	0
Water use / m <sup>3</sup>	0
Other resource use / kg	0
Direct emissions to ambient air, soil and water / kg	0

### USE STAGES SCENARIO DOCUMENTATION - B6-B7 USE OF ENERGY AND WATER

Scenario information	Value
Ancillary materials specified by material / kg or units as appropriate	Not applicable
Net fresh water consumption / m <sup>3</sup>	0
Power output of equipment / kW	44
Characteristic performance, e.g., energy efficiency, emissions, variation of performance with capacity utilization, etc. / Units as appropriate	For more details see product classification table and product description.
Further assumptions for scenario development, e.g., frequency and period of use, number of occupants / Units as appropriate	For more details see product classification table and product description.

### END OF LIFE SCENARIO DOCUMENTATION

Scenario information	Value
Collection process – kg collected separately	7.512
Collection process – kg collected with mixed waste	0
Recovery process – kg for re-use	0
Recovery process – kg for recycling	2.61E+00
Recovery process – kg for energy recovery	0
Disposal (total) – kg for final deposition	3.26E+00
Scenario assumptions e.g. transportation	Lorry, 16-32 metric ton, EURO5; 150 km

## THIRD-PARTY VERIFICATION STATEMENT

EPD Hub declares that this EPD is verified in accordance with ISO 14025 by an independent, third-party verifier. The project report on the Life Cycle Assessment and the report(s) on features of environmental relevance are filed at EPD Hub. EPD Hub PCR and ECO Platform verification checklist are used.

EPD Hub is not able to identify any unjustified deviations from the PCR and EN 15804+A2 in the Environmental Product Declaration and its project report.

EPD Hub maintains its independence as a third-party body; it was not involved in the execution of the LCA or in the development of the declaration and has no conflicts of interest regarding this verification.

The company-specific data and upstream and downstream data have been examined as regards plausibility and consistency. The publisher is responsible for ensuring the factual integrity and legal compliance of this declaration.



Program assistant: Xinyuan Zhang



The software used in creation of this LCA and EPD is verified by EPD Hub to conform to the procedural and methodological requirements outlined in ISO 14025:2010, ISO 14040/14044, EN 15804+A2, and EPD Hub Core Product Category Rules and General Program Instructions.

### [Verified tools](#)

Tool verifier: Hai Ha Nguyen

Tool verification validity: 28 March 2025 - 27 March 2028

# APPENDIX 1

## MATERIAL COMPOSITION

The product material composition is illustrated in the table below. The material weight is given in grams and in percentage on total product weight.

**Table 1: Material composition**

Material	Weight (g)	Weight-%
Aluminium	1521.08	20.25
Bio Plastics	1760	23.43
Copper	311.8	4.15
Glass	1516	20.18
Other Plastics	1393.12	18.54
Paint	33.92	0.45
PCB Alu	46.86	0.62
PCB Copper	106.99	1.42
PCB Iron	104	1.38
PCB Non-ferrous metal	0.07	0
PCB Support	398.59	5.31
PCB Tin	6.5	0.09
Steel	310.08	4.13
Tin	3.12	0.04

## APPENDIX 2

### USE PHASE (B6) VALUES FOR DIFFERENT COUNTRY MIX

In this EPD the B6 impact has been calculated using the energy mix of (EU). The table in this appendix is useful for conversion and comparison of B6 values with other country energy mix. The Global Warming Potential Total (GWP tot) value is illustrated for each country. The value refers to 1 kwh.

Example on how to use the table:

If for example this EPD was done according to EU energy mix and you want to see how the GWP total changes according to a Finland country energy mix, you can take the original value in the results table here highlighted in yellow:

### ENVIRONMENTAL IMPACT DATA, RESULTS PER DECLARED UNIT

*The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding threshold values, safety margins or risks.*

#### CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total <sup>1)</sup>	kg CO <sub>2</sub> e	1.08E+01	2.33E-01	5.06E-01	1.15E+01	3.27E+00	1.68E+00	ND	ND	ND	ND	ND	4.06E-02	ND	0.00E+00	2.88E-02	5.13E-01	2.80E-01	-9.88E-01

Divide that value according to the EU value from the following table (EU = 3.30E-01) and then multiplying for the Finland value from the same table (FINLAND = 1.54E-01).

Thus, the calculation of this example would be:

New B6 GWP tot for Finland = (4.06E-02 / 3.30E-01) x 1.54E-01 = 1.89E-02.

Country	GWP tot (kg CO2 eq. per kwh)		
AFRICA	7.30E-01	GERMANY	3.90E-01
APAC	9.50E-01	INDIA	1.50E+00
AUSTRALIA	8.40E-01	ITALY	3.50E-01
AUSTRIA	2.30E-01	LATAM	3.90E-01
BELGIUM	2.00E-01	NAM	4.50E-01
CHINA	1.02E+00	NETHERLANDS	3.90E-01
DENMARK	1.60E-01	NORWAY	4.50E-02
EU	3.30E-01	ROW	7.30E-01
FINLAND	1.54E-01	SPAIN	2.10E-01
FRANCE	8.70E-02	SWEDEN	3.70E-02
		UK	2.60E-01

Source Ecoinvent 3.10.1

## APPENDIX 3 - EPD HUB ALIGNED

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from a reference variant of a product family, based on various light management scenarios and power inputs of the luminaires within the same product family.

To calculate the Scaled Impact (*SI*), we have followed the below methods:

1. Calculate the power scaling factor (PSF), which is the ratio of the power input of the variant in questions  $P_{in}$  and the power input of the base variant  $P_{base}$ .

$$PSF = \frac{P_{in}}{P_{base}}$$

2. Calculate the Total Scaling factor by multiplying the PSF by the control scaling factor (CSF), where the CSF is determined according the relevant control factor scenario (e.g. if the luminaire has a presence detection system). The presented controls factors values in Table A1 are based on BS EN 15193-1:2017. Please refer to this publication or contact Signify directly for more information.

$$TSF = PSF * CSF$$

**Table 1: Light management function (PEP EcoPassport aligned)**

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

3. Lastly, the GWP of the base variant is then scaled by the TSF.

$$\text{Scaled Impact} = \text{GWP}_{\text{case}} * \text{TSF}$$

The following list of product configurations is not exhaustive. Please use the formula defined in point 1 above to calculate the exact power scaling factor (PSF) for any specific configuration.

**Table 2: GWP per scaling factor (EPD Hub aligned)**

	12NC or Product Family Code	Description	Flux [Lm]	Power [W]	Efficacy [L/W]	PSF	Total Scaling Factor (TSF)				Scaled Impacts (GWP100 B6 - kg CO2eq.)			
							NC	DD	PS	DD+PS	NC	DD	PS	DD+PS
1	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED20-CLO-4S/722	1658	17.0	97.5	0.386	0.386	0.290	0.290	0.213	173.7	130.3	130.3	95.5
2	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED30-CLO-4S/722	2436	25.5	95.5	0.580	0.580	0.435	0.435	0.319	260.6	195.4	195.4	143.3
3	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED40-CLO-4S/722	3192	34.5	92.5	0.784	0.784	0.588	0.588	0.431	352.5	264.4	264.4	193.9
4	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED50-CLO-4S/722	4116	39.5	104.2	0.898	0.898	0.673	0.673	0.494	403.6	302.7	302.7	222.0
5	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED60-CLO-4S/722	4872	47.5	102.6	1.080	1.080	0.810	0.810	0.594	485.4	364.0	364.0	266.9
6	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED70-CLO-4S/722	5712	56.0	102.0	1.273	1.273	0.955	0.955	0.700	572.2	429.2	429.2	314.7
7	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED80-CLO-4S/722	6474	62.0	104.4	1.409	1.409	1.057	1.057	0.775	633.5	475.1	475.1	348.4
8	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED90-CLO-4S/722	7304	70.0	104.3	1.591	1.591	1.193	1.193	0.875	715.3	536.4	536.4	393.4

9	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED100-CLO-4S/722	8036	79.0	101.7	1.795	1.795	1.347	1.347	0.988	807.2	605.4	605.4	444.0
10	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED20-CLO-4S/727	1658	14.8	112.0	0.336	0.336	0.252	0.252	0.185	151.2	113.4	113.4	83.2
11	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED30-CLO-4S/727	2436	21.5	113.3	0.489	0.489	0.366	0.366	0.269	219.7	164.8	164.8	120.8
12	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED40-CLO-4S/727	3276	29.5	111.1	0.670	0.670	0.503	0.503	0.369	301.4	226.1	226.1	165.8
13	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED50-CLO-4S/727	4116	34.5	119.3	0.784	0.784	0.588	0.588	0.431	352.5	264.4	264.4	193.9
14	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED60-CLO-4S/727	4872	40.5	120.3	0.920	0.920	0.690	0.690	0.506	413.8	310.4	310.4	227.6
15	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED70-CLO-4S/727	5712	47.5	120.3	1.080	1.080	0.810	0.810	0.594	485.4	364.0	364.0	266.9
16	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED80-CLO-4S/727	6474	53.0	122.2	1.205	1.205	0.903	0.903	0.663	541.6	406.2	406.2	297.9
17	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED90-CLO-4S/727	7304	60.0	121.7	1.364	1.364	1.023	1.023	0.750	613.1	459.8	459.8	337.2
18	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED100-CLO-4S/727	8036	67.0	119.9	1.523	1.523	1.142	1.142	0.838	684.6	513.5	513.5	376.5
19	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED110-CLO-4S/727	8610	74.0	116.4	1.682	1.682	1.261	1.261	0.925	756.1	567.1	567.1	415.9
20	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED20-CLO-4S/730	1658	13.4	123.7	0.305	0.305	0.228	0.228	0.168	136.9	102.7	102.7	75.3
21	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED30-CLO-4S/730	2465	19.6	125.8	0.445	0.445	0.334	0.334	0.245	200.3	150.2	150.2	110.2
22	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED40-CLO-4S/730	3276	26.5	123.6	0.602	0.602	0.452	0.452	0.331	270.8	203.1	203.1	148.9
23	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED50-CLO-4S/730	4116	30.5	135.0	0.693	0.693	0.520	0.520	0.381	311.6	233.7	233.7	171.4

24	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED60-CLO-4S/730	4872	36.5	133.5	0.830	0.830	0.622	0.622	0.456	373.0	279.7	279.7	205.1
25	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED70-CLO-4S/730	5712	42.5	134.4	0.966	0.966	0.724	0.724	0.531	434.3	325.7	325.7	238.8
26	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED80-CLO-4S/730	6552	47.5	137.9	1.080	1.080	0.810	0.810	0.594	485.4	364.0	364.0	266.9
27	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED90-CLO-4S/730	7304	54.0	135.3	1.227	1.227	0.920	0.920	0.675	551.8	413.8	413.8	303.5
28	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED100-CLO-4S/730	8134	60.0	135.6	1.364	1.364	1.023	1.023	0.750	613.1	459.8	459.8	337.2
29	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED110-CLO-4S/730	8715	66.0	132.0	1.500	1.500	1.125	1.125	0.825	674.4	505.8	505.8	370.9
30	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED120-CLO-4S/730	9545	72.0	132.6	1.636	1.636	1.227	1.227	0.900	735.7	551.8	551.8	404.6
31	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED130-CLO-4S/730	10250	78.0	131.4	1.773	1.773	1.330	1.330	0.975	797.0	597.8	597.8	438.4
32	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED20-CLO-4S/740	1658	12.6	131.5	0.286	0.286	0.215	0.215	0.158	128.7	96.6	96.6	70.8
33	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED30-CLO-4S/740	2465	18.4	134.0	0.418	0.418	0.314	0.314	0.230	188.0	141.0	141.0	103.4
34	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED40-CLO-4S/740	3315	25.0	132.6	0.568	0.568	0.426	0.426	0.313	255.5	191.6	191.6	140.5
35	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED50-CLO-4S/740	4116	29.0	141.9	0.659	0.659	0.494	0.494	0.363	296.3	222.2	222.2	163.0
36	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED60-CLO-4S/740	4872	35.0	139.2	0.795	0.795	0.597	0.597	0.438	357.6	268.2	268.2	196.7
37	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED70-CLO-4S/740	5712	40.5	141.0	0.920	0.920	0.690	0.690	0.506	413.8	310.4	310.4	227.6
38	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED80-CLO-4S/740	6474	45.5	142.3	1.034	1.034	0.776	0.776	0.569	464.9	348.7	348.7	255.7

39	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED90-CLO-4S/740	7304	51.0	143.2	1.159	1.159	0.869	0.869	0.638	521.1	390.8	390.8	286.6
40	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED100-CLO-4S/740	8134	57.0	142.7	1.295	1.295	0.972	0.972	0.713	582.4	436.8	436.8	320.3
41	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED110-CLO-4S/740	8715	62.0	140.6	1.409	1.409	1.057	1.057	0.775	633.5	475.1	475.1	348.4
42	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED120-CLO-4S/740	9545	68.0	140.4	1.545	1.545	1.159	1.159	0.850	694.8	521.1	521.1	382.2
43	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED130-CLO-4S/740	10250	74.0	138.5	1.682	1.682	1.261	1.261	0.925	756.1	567.1	567.1	415.9
44	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED140-CLO-4S/740	11070	79.0	140.1	1.795	1.795	1.347	1.347	0.988	807.2	605.4	605.4	444.0
45	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED20-CLO-4S/827	1658	17.0	97.5	0.386	0.386	0.290	0.290	0.213	173.7	130.3	130.3	95.5
46	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED30-CLO-4S/827	2436	25.5	95.5	0.580	0.580	0.435	0.435	0.319	260.6	195.4	195.4	143.3
47	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED40-CLO-4S/827	3192	34.5	92.5	0.784	0.784	0.588	0.588	0.431	352.5	264.4	264.4	193.9
48	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED50-CLO-4S/827	4116	39.5	104.2	0.898	0.898	0.673	0.673	0.494	403.6	302.7	302.7	222.0
49	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED60-CLO-4S/827	4872	47.5	102.6	1.080	1.080	0.810	0.810	0.594	485.4	364.0	364.0	266.9
50	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED70-CLO-4S/827	5712	56.0	102.0	1.273	1.273	0.955	0.955	0.700	572.2	429.2	429.2	314.7
51	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED80-CLO-4S/827	6474	62.0	104.4	1.409	1.409	1.057	1.057	0.775	633.5	475.1	475.1	348.4
52	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED90-CLO-4S/827	7304	70.0	104.3	1.591	1.591	1.193	1.193	0.875	715.3	536.4	536.4	393.4
53	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED100-CLO-4S/827	8036	79.0	101.7	1.795	1.795	1.347	1.347	0.988	807.2	605.4	605.4	444.0

54	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED20-CLO-4S/830	1658	16.0	103.6	0.364	0.364	0.273	0.273	0.200	163.5	122.6	122.6	89.9
55	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED30-CLO-4S/830	2465	23.5	104.9	0.534	0.534	0.401	0.401	0.294	240.1	180.1	180.1	132.1
56	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED40-CLO-4S/830	3192	32.0	99.8	0.727	0.727	0.545	0.545	0.400	327.0	245.2	245.2	179.8
57	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED50-CLO-4S/830	4116	37.0	111.2	0.841	0.841	0.631	0.631	0.463	378.1	283.5	283.5	207.9
58	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	<u>LED60-CLO-4S/830</u>	4872	44.0	110.7	1.000	1.000	0.750	0.750	0.550	449.6	337.2	337.2	247.3
59	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED70-CLO-4S/830	5712	52.0	109.8	1.182	1.182	0.886	0.886	0.650	531.3	398.5	398.5	292.2
60	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED80-CLO-4S/830	6474	58.0	111.6	1.318	1.318	0.989	0.989	0.725	592.6	444.5	444.5	326.0
61	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED90-CLO-4S/830	7304	65.0	112.4	1.477	1.477	1.108	1.108	0.813	664.2	498.1	498.1	365.3
62	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED100-CLO-4S/830	8134	73.0	111.4	1.659	1.659	1.244	1.244	0.913	745.9	559.4	559.4	410.3
63	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED110-CLO-4S/830	8610	79.0	109.0	1.795	1.795	1.347	1.347	0.988	807.2	605.4	605.4	444.0
64	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED20-CLO-4S/840	1658	15.4	107.6	0.350	0.350	0.263	0.263	0.193	157.4	118.0	118.0	86.5
65	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED30-CLO-4S/840	2436	23.0	105.9	0.523	0.523	0.392	0.392	0.288	235.0	176.3	176.3	129.3
66	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED40-CLO-4S/840	3276	31.0	105.7	0.705	0.705	0.528	0.528	0.388	316.8	237.6	237.6	174.2
67	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED50-CLO-4S/840	4116	35.5	115.9	0.807	0.807	0.605	0.605	0.444	362.7	272.1	272.1	199.5
68	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED60-CLO-4S/840	4872	42.5	114.6	0.966	0.966	0.724	0.724	0.531	434.3	325.7	325.7	238.8

69	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED70-CLO-4S/840	5712	50.0	114.2	1.136	1.136	0.852	0.852	0.625	510.9	383.2	383.2	281.0
70	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED80-CLO-4S/840	6474	56.0	115.6	1.273	1.273	0.955	0.955	0.700	572.2	429.2	429.2	314.7
71	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED90-CLO-4S/840	7304	63.0	115.9	1.432	1.432	1.074	1.074	0.788	643.7	482.8	482.8	354.1
72	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED100-CLO-4S/840	7968	70.0	113.8	1.591	1.591	1.193	1.193	0.875	715.3	536.4	536.4	393.4
73	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED110-CLO-4S/840	8610	78.0	110.4	1.773	1.773	1.330	1.330	0.975	797.0	597.8	597.8	438.4

## PEP ECOPASSPORT ALIGNED

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from a reference variant of a product family, based on various light management functions, the lumen output ( $O_{lum}$ ) and reference service life ( $RSL$ ) of each product within the same product family.

To calculate the Scaled Impact ( $S_{I_{pep}}$ ), we have followed the below methods:

1. Calculate the power scaling factor (PSF), which is the ratio of the power input of the variant in questions  $P_{in}$  and the power input of the base variant  $P_{base}$ .

$$PSF = \frac{P_{in}}{P_{base}}$$

2. Using this scaled GWP, we then can apply the PEP Ecopassport method for calculating the environmental impact of the functional unit for a luminary (1000 lumens over 35000 hours), applied to B6, where the Functional Unit application considers the lumen output ( $O_{lum}$ ) and reference service lifetime ( $RSL$ ) of the product to estimate the final environmental impact. The scaled impact ( $S_{I_{pep}}$ ) is presented in Table A4.

$$GSF = \frac{FU_{pep}}{FU_p} = \frac{1,000}{O_{lum}} * \frac{35,000}{RSL}$$

3. Calculate the GWP scaling factor ( $PGSF$ ), by multiplying the PSF by the GSF.

$$PGSF = PSF * GSF$$

- Calculate the Total Scaling factor by multiplying the PSF by the control scaling factor (CSF), where the CSF is determined according the relevant control factor scenario (e.g. if the luminaire has a presence detection system), as presented in Table A1.

$$TSF = PGSF * CSF$$

**Table 3: Light management functions (PEP EcoPassport aligned)**

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

- Lastly, the GWP of the base variant is then scaled by the TSF.

$$Scaled\ GWP = GWP_{case} * TSF$$

**Table 4: Impact per scaling factor (PEP EcoPassport aligned)**

	12NC or Product Family Code	Description	Flux [lm]	Power [W]	Efficacy [L/W]	PSF	Total Scaling Factor (TSF)				Scaled Impacts (GWP100 B6 - kg CO2eq.)			
							NC	DD	PS	DD+PS	NC	DD	PS	DD+PS
1	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED20-CLO-4S/722	1658	17.0	97.5	0.386	0.082	0.061	0.061	0.045	36.7	27.5	27.5	20.2
2	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED30-CLO-4S/722	2436	25.5	95.5	0.580	0.083	0.062	0.062	0.046	37.4	28.1	28.1	20.6
3	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED40-CLO-4S/722	3192	34.5	92.5	0.784	0.086	0.064	0.064	0.047	38.7	29.0	29.0	21.3
4	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED50-CLO-4S/722	4116	39.5	104.2	0.898	0.076	0.057	0.057	0.042	34.3	25.7	25.7	18.9
5	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED60-CLO-4S/722	4872	47.5	102.6	1.080	0.078	0.058	0.058	0.043	34.9	26.2	26.2	19.2
6	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED70-CLO-4S/722	5712	56.0	102.0	1.273	0.078	0.058	0.058	0.043	35.1	26.3	26.3	19.3
7	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED80-CLO-4S/722	6474	62.0	104.4	1.409	0.076	0.057	0.057	0.042	34.2	25.7	25.7	18.8
8	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED90-CLO-4S/722	7304	70.0	104.3	1.591	0.076	0.057	0.057	0.042	34.3	25.7	25.7	18.9
9	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED100-CLO-4S/722	8036	79.0	101.7	1.795	0.078	0.059	0.059	0.043	35.2	26.4	26.4	19.3
10	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED20-CLO-4S/727	1658	14.8	112.0	0.336	0.071	0.053	0.053	0.039	31.9	23.9	23.9	17.6
11	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED30-CLO-4S/727	2436	21.5	113.3	0.489	0.070	0.053	0.053	0.039	31.6	23.7	23.7	17.4
12	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED40-CLO-4S/727	3276	29.5	111.1	0.670	0.072	0.054	0.054	0.039	32.2	24.2	24.2	17.7

13	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED50-CLO-4S/727	4116	34.5	119.3	0.784	0.067	0.050	0.050	0.037	30.0	22.5	22.5	16.5
14	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED60-CLO-4S/727	4872	40.5	120.3	0.920	0.066	0.050	0.050	0.036	29.7	22.3	22.3	16.4
15	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED70-CLO-4S/727	5712	47.5	120.3	1.080	0.066	0.050	0.050	0.036	29.7	22.3	22.3	16.4
16	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED80-CLO-4S/727	6474	53.0	122.2	1.205	0.065	0.049	0.049	0.036	29.3	22.0	22.0	16.1
17	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED90-CLO-4S/727	7304	60.0	121.7	1.364	0.065	0.049	0.049	0.036	29.4	22.0	22.0	16.2
18	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED100-CLO-4S/727	8036	67.0	119.9	1.523	0.066	0.050	0.050	0.036	29.8	22.4	22.4	16.4
19	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED110-CLO-4S/727	8610	74.0	116.4	1.682	0.068	0.051	0.051	0.038	30.7	23.1	23.1	16.9
20	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED20-CLO-4S/730	1658	13.4	123.7	0.305	0.064	0.048	0.048	0.035	28.9	21.7	21.7	15.9
21	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED30-CLO-4S/730	2465	19.6	125.8	0.445	0.063	0.047	0.047	0.035	28.4	21.3	21.3	15.6
22	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED40-CLO-4S/730	3276	26.5	123.6	0.602	0.064	0.048	0.048	0.035	28.9	21.7	21.7	15.9
23	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED50-CLO-4S/730	4116	30.5	135.0	0.693	0.059	0.044	0.044	0.032	26.5	19.9	19.9	14.6
24	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED60-CLO-4S/730	4872	36.5	133.5	0.830	0.060	0.045	0.045	0.033	26.8	20.1	20.1	14.7
25	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED70-CLO-4S/730	5712	42.5	134.4	0.966	0.059	0.044	0.044	0.033	26.6	20.0	20.0	14.6
26	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED80-CLO-4S/730	6552	47.5	137.9	1.080	0.058	0.043	0.043	0.032	25.9	19.4	19.4	14.3
27	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED90-CLO-4S/730	7304	54.0	135.3	1.227	0.059	0.044	0.044	0.032	26.4	19.8	19.8	14.5

28	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED100-CLO-4S/730	8134	60.0	135.6	1.364	0.059	0.044	0.044	0.032	26.4	19.8	19.8	14.5
29	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED110-CLO-4S/730	8715	66.0	132.0	1.500	0.060	0.045	0.045	0.033	27.1	20.3	20.3	14.9
30	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED120-CLO-4S/730	9545	72.0	132.6	1.636	0.060	0.045	0.045	0.033	27.0	20.2	20.2	14.8
31	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED130-CLO-4S/730	10250	78.0	131.4	1.773	0.061	0.045	0.045	0.033	27.2	20.4	20.4	15.0
32	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED20-CLO-4S/740	1658	12.6	131.5	0.286	0.060	0.045	0.045	0.033	27.2	20.4	20.4	15.0
33	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED30-CLO-4S/740	2465	18.4	134.0	0.418	0.059	0.045	0.045	0.033	26.7	20.0	20.0	14.7
34	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED40-CLO-4S/740	3315	25.0	132.6	0.568	0.060	0.045	0.045	0.033	27.0	20.2	20.2	14.8
35	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED50-CLO-4S/740	4116	29.0	141.9	0.659	0.056	0.042	0.042	0.031	25.2	18.9	18.9	13.9
36	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED60-CLO-4S/740	4872	35.0	139.2	0.795	0.057	0.043	0.043	0.031	25.7	19.3	19.3	14.1
37	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED70-CLO-4S/740	5712	40.5	141.0	0.920	0.056	0.042	0.042	0.031	25.4	19.0	19.0	13.9
38	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED80-CLO-4S/740	6474	45.5	142.3	1.034	0.056	0.042	0.042	0.031	25.1	18.9	18.9	13.8
39	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED90-CLO-4S/740	7304	51.0	143.2	1.159	0.056	0.042	0.042	0.031	25.0	18.7	18.7	13.7
40	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED100-CLO-4S/740	8134	57.0	142.7	1.295	0.056	0.042	0.042	0.031	25.1	18.8	18.8	13.8
41	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED110-CLO-4S/740	8715	62.0	140.6	1.409	0.057	0.042	0.042	0.031	25.4	19.1	19.1	14.0
42	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED120-CLO-4S/740	9545	68.0	140.4	1.545	0.057	0.043	0.043	0.031	25.5	19.1	19.1	14.0

43	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED130-CLO-4S/740	10250	74.0	138.5	1.682	0.057	0.043	0.043	0.032	25.8	19.4	19.4	14.2
44	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED140-CLO-4S/740	11070	79.0	140.1	1.795	0.057	0.043	0.043	0.031	25.5	19.1	19.1	14.0
45	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED20-CLO-4S/827	1658	17.0	97.5	0.386	0.082	0.061	0.061	0.045	36.7	27.5	27.5	20.2
46	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED30-CLO-4S/827	2436	25.5	95.5	0.580	0.083	0.062	0.062	0.046	37.4	28.1	28.1	20.6
47	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED40-CLO-4S/827	3192	34.5	92.5	0.784	0.086	0.064	0.064	0.047	38.7	29.0	29.0	21.3
48	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED50-CLO-4S/827	4116	39.5	104.2	0.898	0.076	0.057	0.057	0.042	34.3	25.7	25.7	18.9
49	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED60-CLO-4S/827	4872	47.5	102.6	1.080	0.078	0.058	0.058	0.043	34.9	26.2	26.2	19.2
50	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED70-CLO-4S/827	5712	56.0	102.0	1.273	0.078	0.058	0.058	0.043	35.1	26.3	26.3	19.3
51	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED80-CLO-4S/827	6474	62.0	104.4	1.409	0.076	0.057	0.057	0.042	34.2	25.7	25.7	18.8
52	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED90-CLO-4S/827	7304	70.0	104.3	1.591	0.076	0.057	0.057	0.042	34.3	25.7	25.7	18.9
53	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED100-CLO-4S/827	8036	79.0	101.7	1.795	0.078	0.059	0.059	0.043	35.2	26.4	26.4	19.3
54	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED20-CLO-4S/830	1658	16.0	103.6	0.364	0.077	0.058	0.058	0.042	34.5	25.9	25.9	19.0
55	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED30-CLO-4S/830	2465	23.5	104.9	0.534	0.076	0.057	0.057	0.042	34.1	25.6	25.6	18.8
56	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED40-CLO-4S/830	3192	32.0	99.8	0.727	0.080	0.060	0.060	0.044	35.9	26.9	26.9	19.7
57	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED50-CLO-4S/830	4116	37.0	111.2	0.841	0.072	0.054	0.054	0.039	32.1	24.1	24.1	17.7

58	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	<u>LED60-CLO-4S/830</u>	4872	44.0	110.7	1.000	0.072	0.054	0.054	0.040	32.3	24.2	24.2	17.8
59	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED70-CLO-4S/830	5712	52.0	109.8	1.182	0.072	0.054	0.054	0.040	32.6	24.4	24.4	17.9
60	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED80-CLO-4S/830	6474	58.0	111.6	1.318	0.071	0.053	0.053	0.039	32.0	24.0	24.0	17.6
61	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED90-CLO-4S/830	7304	65.0	112.4	1.477	0.071	0.053	0.053	0.039	31.8	23.9	23.9	17.5
62	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED100-CLO-4S/830	8134	73.0	111.4	1.659	0.071	0.054	0.054	0.039	32.1	24.1	24.1	17.7
63	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED110-CLO-4S/830	8610	79.0	109.0	1.795	0.073	0.055	0.055	0.040	32.8	24.6	24.6	18.0
64	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED20-CLO-4S/840	1658	15.4	107.6	0.350	0.074	0.055	0.055	0.041	33.2	24.9	24.9	18.3
65	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED30-CLO-4S/840	2436	23.0	105.9	0.523	0.075	0.056	0.056	0.041	33.8	25.3	25.3	18.6
66	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED40-CLO-4S/840	3276	31.0	105.7	0.705	0.075	0.056	0.056	0.041	33.8	25.4	25.4	18.6
67	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED50-CLO-4S/840	4116	35.5	115.9	0.807	0.069	0.051	0.051	0.038	30.8	23.1	23.1	17.0
68	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED60-CLO-4S/840	4872	42.5	114.6	0.966	0.069	0.052	0.052	0.038	31.2	23.4	23.4	17.2
69	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED70-CLO-4S/840	5712	50.0	114.2	1.136	0.070	0.052	0.052	0.038	31.3	23.5	23.5	17.2
70	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED80-CLO-4S/840	6474	56.0	115.6	1.273	0.069	0.052	0.052	0.038	30.9	23.2	23.2	17.0
71	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED90-CLO-4S/840	7304	63.0	115.9	1.432	0.069	0.051	0.051	0.038	30.8	23.1	23.1	17.0
72	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED100-CLO-4S/840	7968	70.0	113.8	1.591	0.070	0.052	0.052	0.038	31.4	23.6	23.6	17.3

73	BDS862, BRS862, BSS862, BDS962, BRS962, BSS962	LED110-CLO-4S/840	8610	78.0	110.4	1.773	0.072	0.054	0.054	0.040	32.4	24.3	24.3	17.8
----	--	-------------------	------	------	-------	-------	-------	-------	-------	-------	------	------	------	------